



The Ultimate Ampeg Cabinet Wiring Reference Guide

Disclaimer: This Service Manual is being supplied as a free reference. Limited parts may be available through local and online Ampeg distributors. If you are not qualified to work on electronic equipment, it is recommended that you contact one of our friendly Authorized Service Centers. Authorized Service Centers may be able to order parts directly by contacting our Service Department.

**THE INFORMATION CONTAINED IN THIS REFERENCE MANUAL IS THE SOLE
PROPERTY OF YAMAHA GUITAR GROUP.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF YAMAHA GUITAR GROUP IS PROHIBITED.**



Ampeg reserves the right to change specifications without notice.

YAMAHA GUITAR GROUP INC.

YGG Service Department

26580 Agoura Rd. • Calabasas, CA • 91302 • USA

Phone: 818.575.3600

Email: service@yamahaguitargroup.com

www.ampeg.com

© 2025 Yamaha Guitar Group, Inc.

All rights reserved.

Table of Contents

Modern Products

Classic Series	6
SVT-810E/ SVT-810AV	6
SVT-610HLF	7
SVT-410HLF	8
SVT-410HE.....	9
SVT-210AV	10
Micro CL 2x10.....	11
SVT-212AV	12
SVT-112AV	13
SVT-15E	14
Heritage Series	15
HSVT-810E/ HSVT-810AV	15
HSVT-410HLF	16
Portaflex Series	17
PF-410HLF	17
PF-210HE.....	18
PF-115HE.....	19
PF-115LF.....	20
PF-112HLF	21
Venture Series	22
VB-88	22
VB-410	23
VB-212	24
VB-210	25
VB-115	26
VB-112	27
Pro Neo Series	28
PN-410HLF	28
PN-210HLF	29
PN-115HLF	30

Table of Contents
Discontinued/Legacy Products

B410H Series.....31

 B-410HE31

 B-41010HLF.....32

BSE Series.....33

 BSE-410H.....33

 BSE-410HLF34

 BSE-410HS.....35

 BSE-11536

 BSE-115T.....37

BXT Series.....38

 BXT-410HL838

 BXT-410HL439

 BXT-210M.....40

 BXT-115HL841

 BXT-115HL442

Portabass Series.....43

 PB-212H43

 PB-210H44

 PB-112H45

 PB-110H46

PRO Series.....47

 PR-1832HE47

 PR-1528HE48

 PR-810Ha.....49

 PR-810Hb, c50

 PR-410HLF.....51

 PR-410H52

 PR-212H53

 PR-210H54

 PR-15H55

Table of Contents


Discontinued/Legacy Products

Classic Series	56
SVT-810HPC	56
SVT-810HP	57
SVT-808HE.....	58
SVT-806HE.....	59
SVT-1540HE.....	60
SVT-1510HE.....	61
SVT-50DL/ SVT-50HE Isovent	62
SVT-412HE.....	63
SVT-215E	64
SVT-215LGS	65
SVT-410HLN	66
SVT-410HEN	67
SVT-210HE, SVT-210HEN	68
SVT-18, SVT-18E	69
SVT-112HE.....	70
SVR Series	71
SVR-212	71
SVR-215	72
DD Series	73
DD-12.....	73
DD-15.....	74
V Series (1970s)	75
V-9	75
V-6	76
V-6B	77
V-4	78
B Series (60s-70s)	79
B25B	79
B Series (70s)	80
B40	80
BT Series (60s-70s)	81
BT-25, BT-25L, BT-140	81


Table of Contents
Discontinued/Legacy Products

G Series (1975-1980)82
 G-60.....82
SBT Series (1970)83
 SBT.....83
SST Series (1970)84
 SST.....84
ST Series (1970)85
 ST-42.....85
 ST-25.....86
 ST-22.....87
V-412 Series88
 V-412BA, V-412TA.....88
 V-412BC, V-412TC89
 V-412BE, V-412TE90
 V-412BL, V-412TL.....91
 V-412BV, V-412TV92
VH-412 Series93
 VH-412TA, VH-412TB.....93
Diamond Blue Series94
 R-412TA, R-412BA94
SS Series95
 SS-412ER, SS-412ES.....95
 SS-412AR, SS-412AS96
 SS-212EC97


Series	Classic
Model	SVT-810E, SVT-810AV
Type	8x10" /Dual 4x10 enclosure
Cabinet Impedance	4 Ohms/ Dual 8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-032-01
Woofer Power Handling	150 Watts

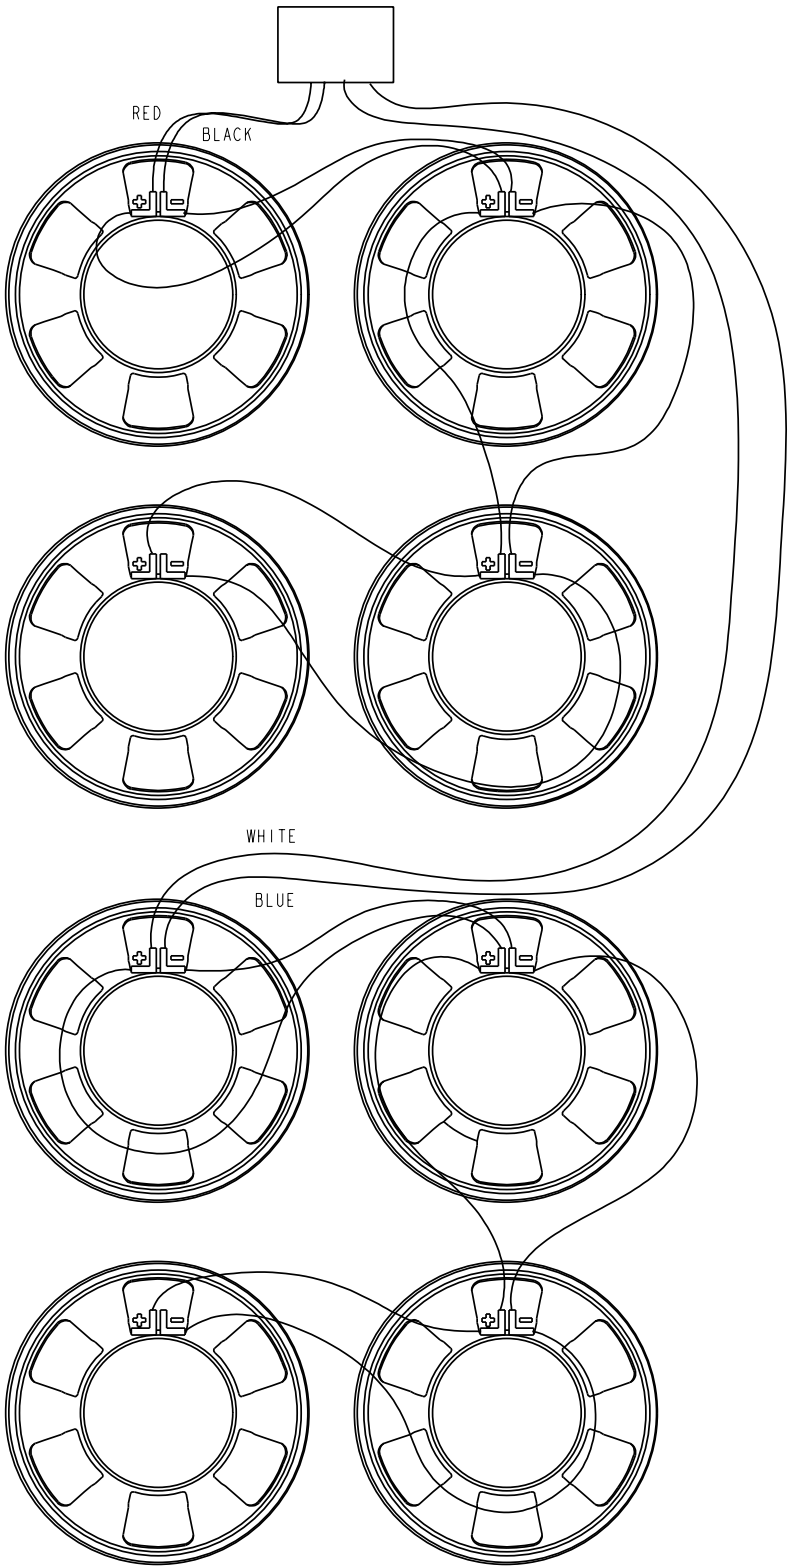


Series	Classic
Model	SVT-610HLF
Type	6x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	6 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-510-06
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

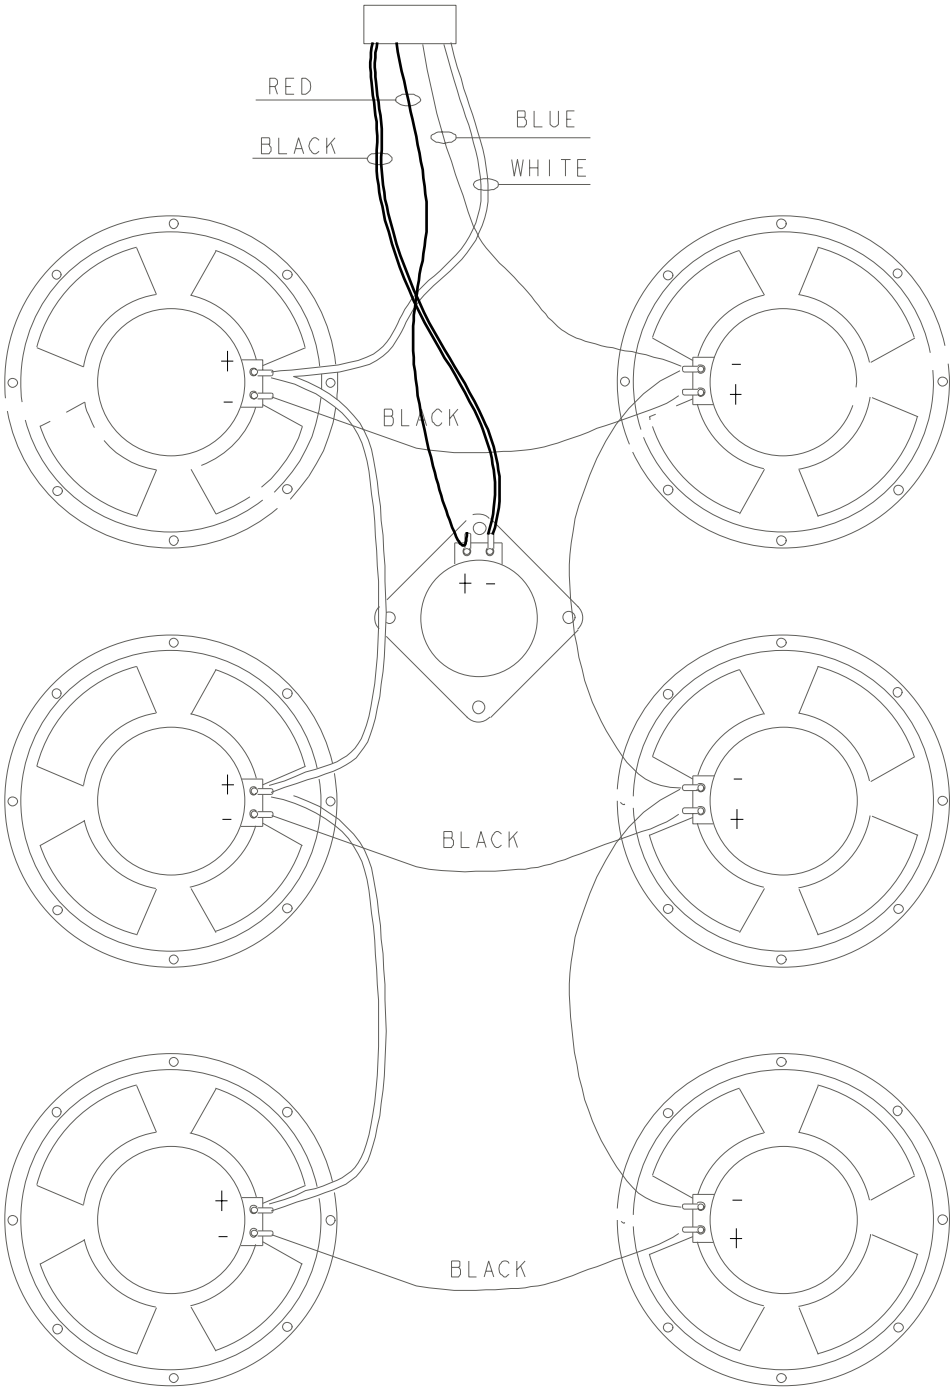


Series	Classic
Model	SVT-410HLF
Type	4x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-510-04
Woofer Power Handling	100 Watts
Tweeter Part Number	86-515-08
See Also	SVT-410HLN

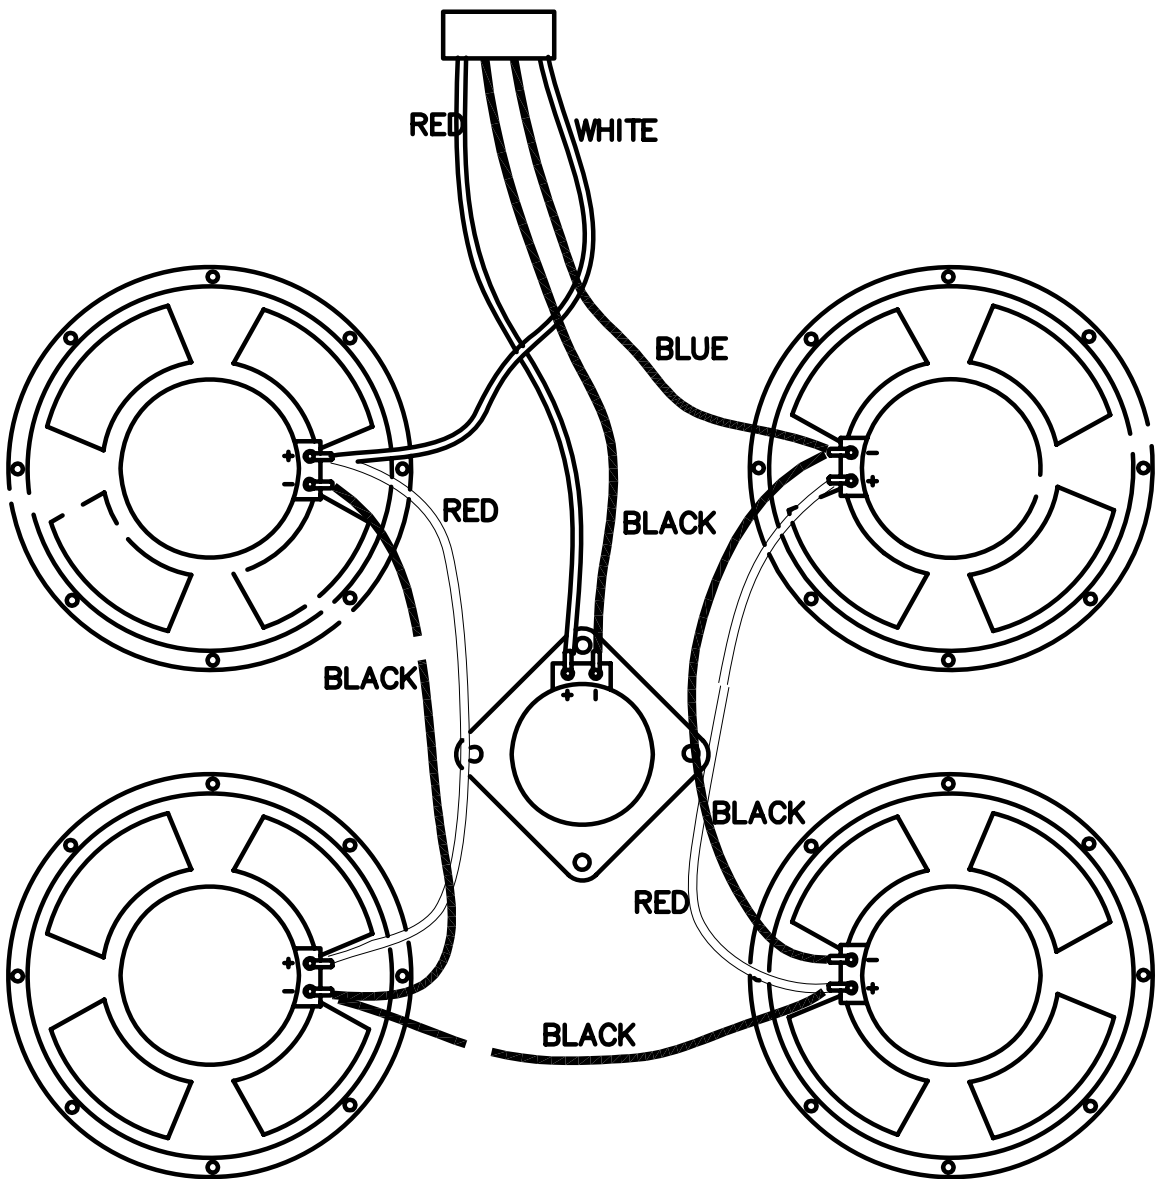


Series	Classic
Model	SVT-410HE
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-032-01
Woofer Power Handling	100 Watts
Tweeter Part Number	86-515-08
See Also	SVT-410HEN

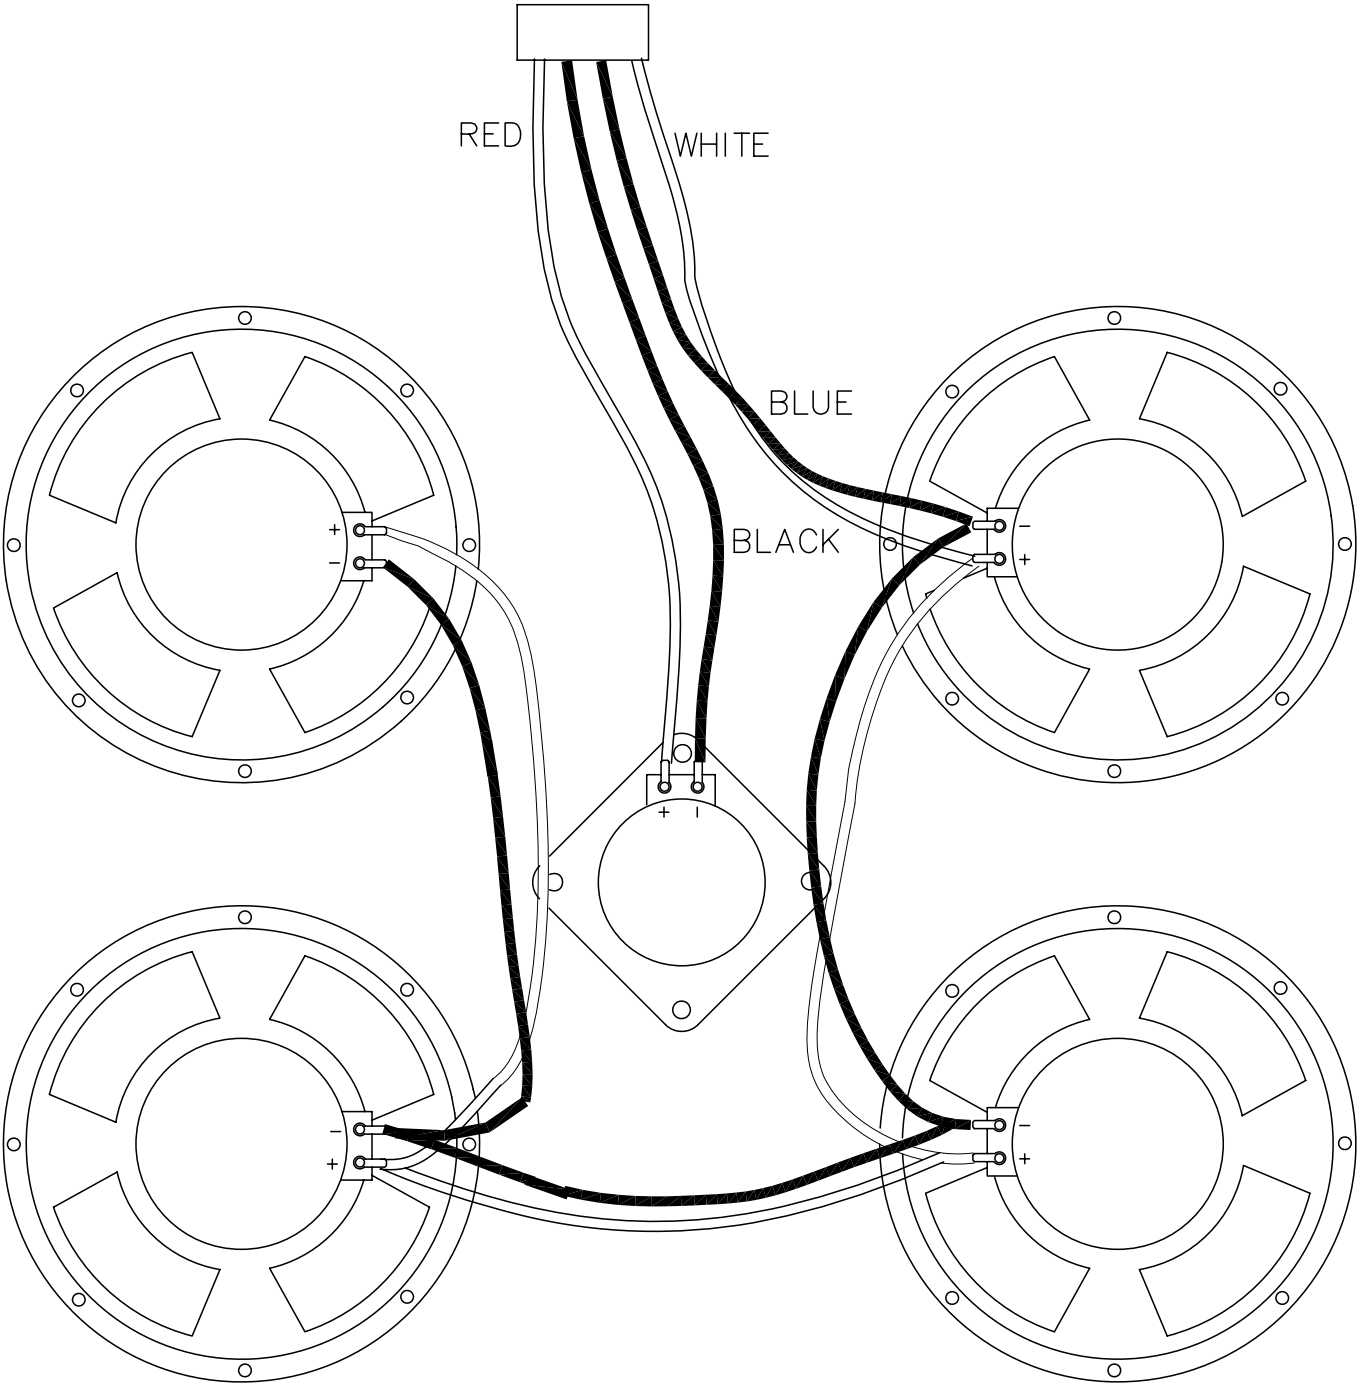


Series	Classic
Model	SVT-210AV
Type	2x10" enclosure
Cabinet Impedance	8 Ohms
Speaker Impedance	4 Ohms
Wiring	Series
Woofer Part Number	A0031349
Woofer Power Handling	100 Watts

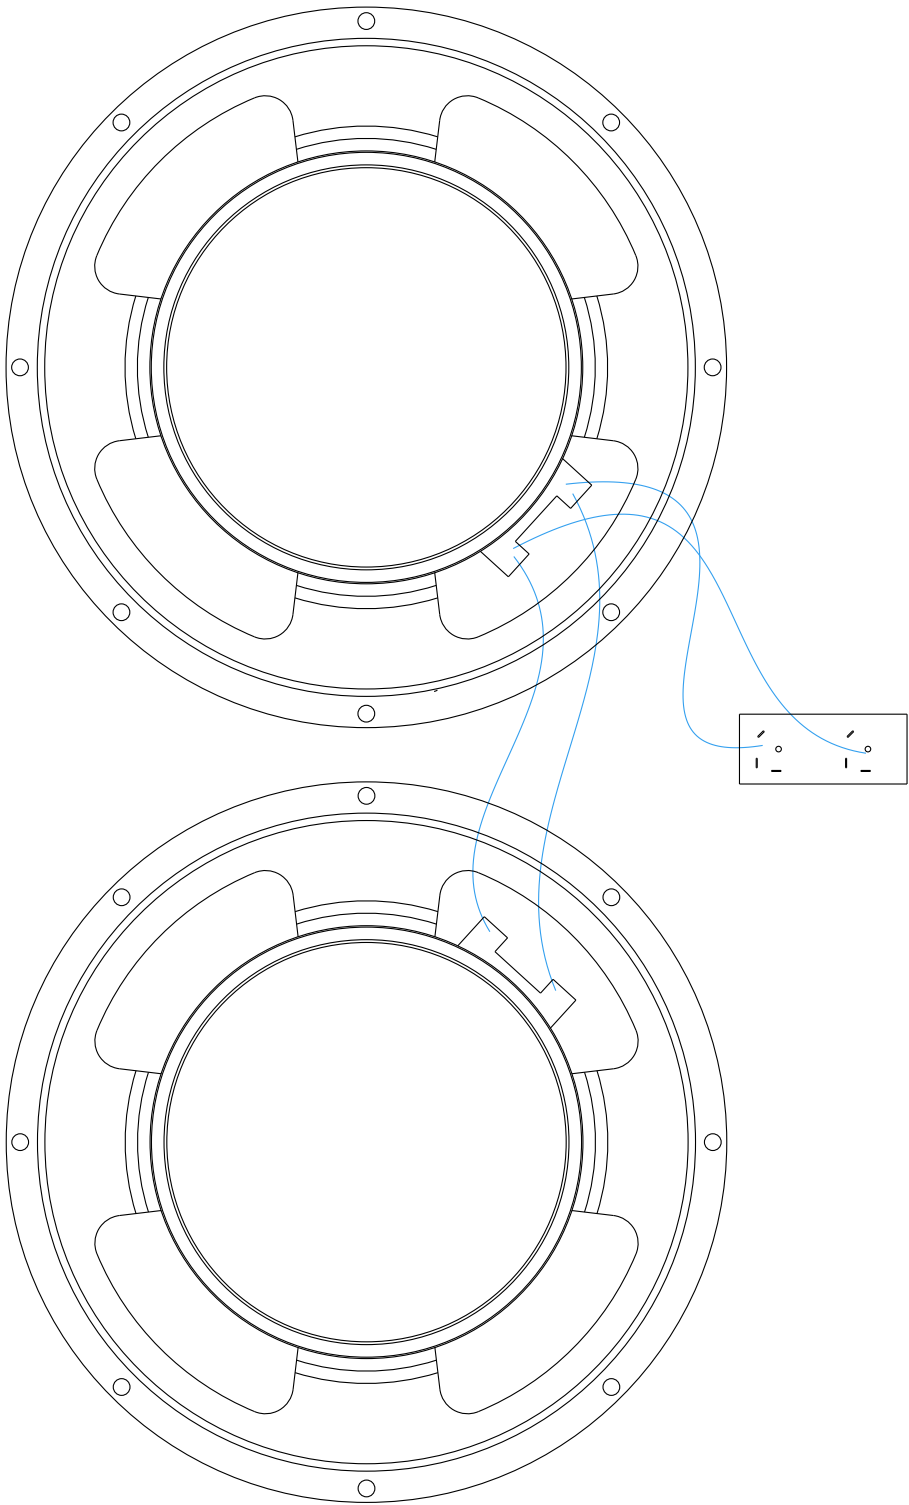

Series	Classic
Model	MICRO CL 2x10
Type	2x10" enclosure
Cabinet Impedance	8 Ohms
Speaker Impedance	16 Ohms
Wiring	Parallel
Woofer Part Number	A2045534
Woofer Power Handling	50 Watts

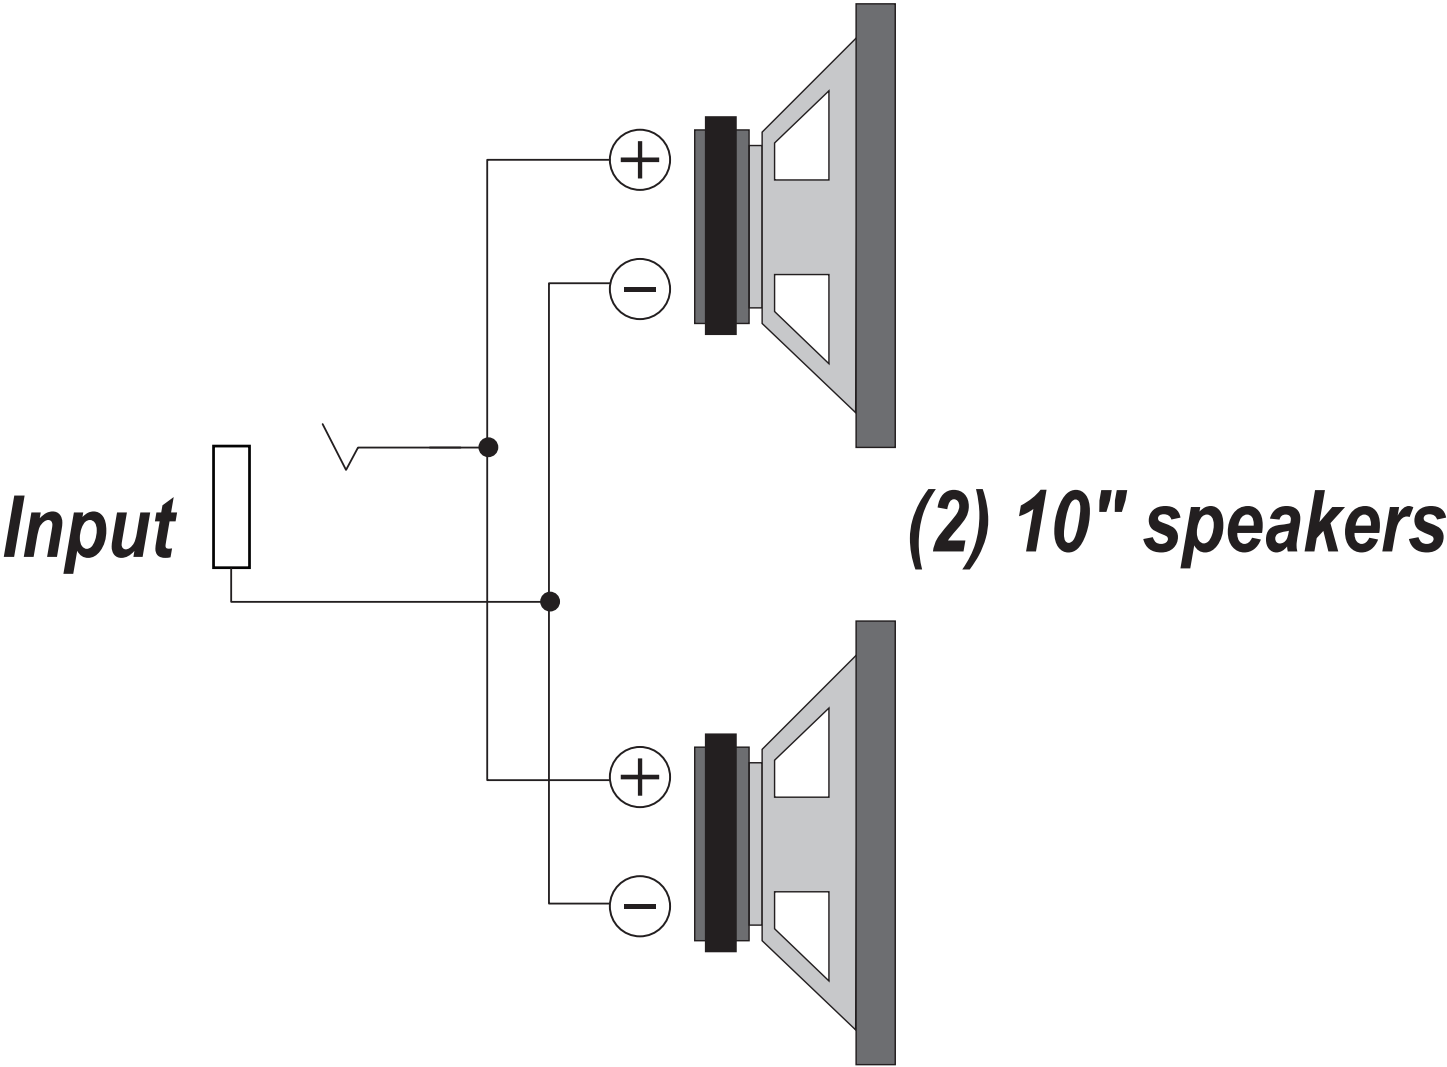


Series	Classic
Model	SVT-212AV
Type	2x12" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	A2041870
Woofer Power Handling	300 Watts
Tweeter Part Number	86-515-08

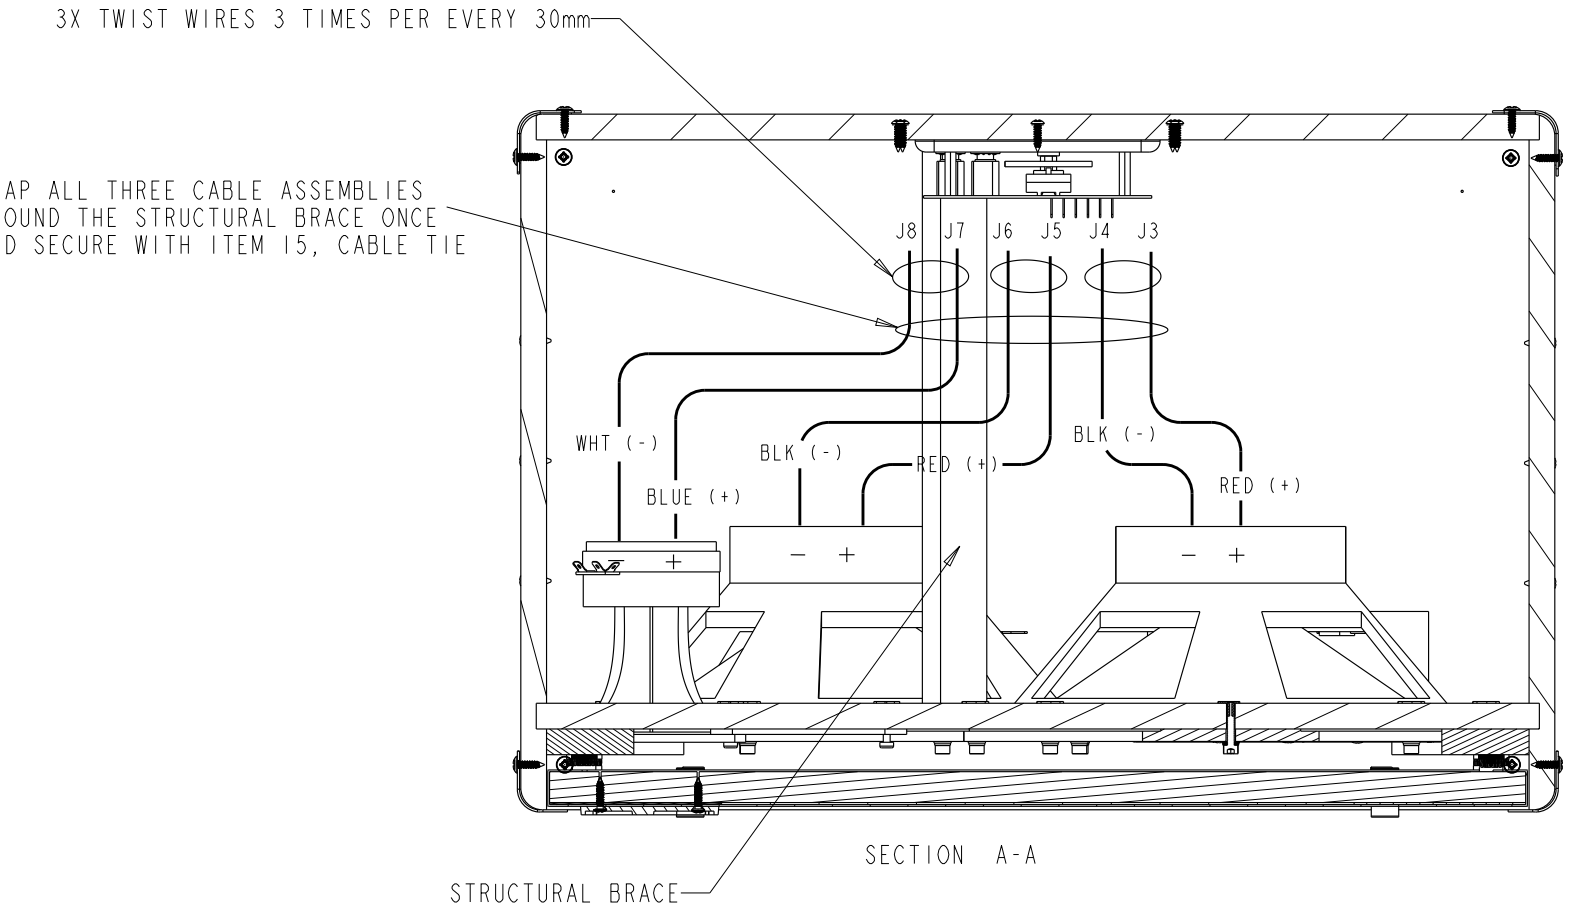


Series	Classic
Model	SVT-112AV
Type	1x12" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	A2041870
Woofer Power Handling	300 Watts
Tweeter Part Number	86-515-08






TWIST WIRES 3 TIMES PER EVERY 30mm

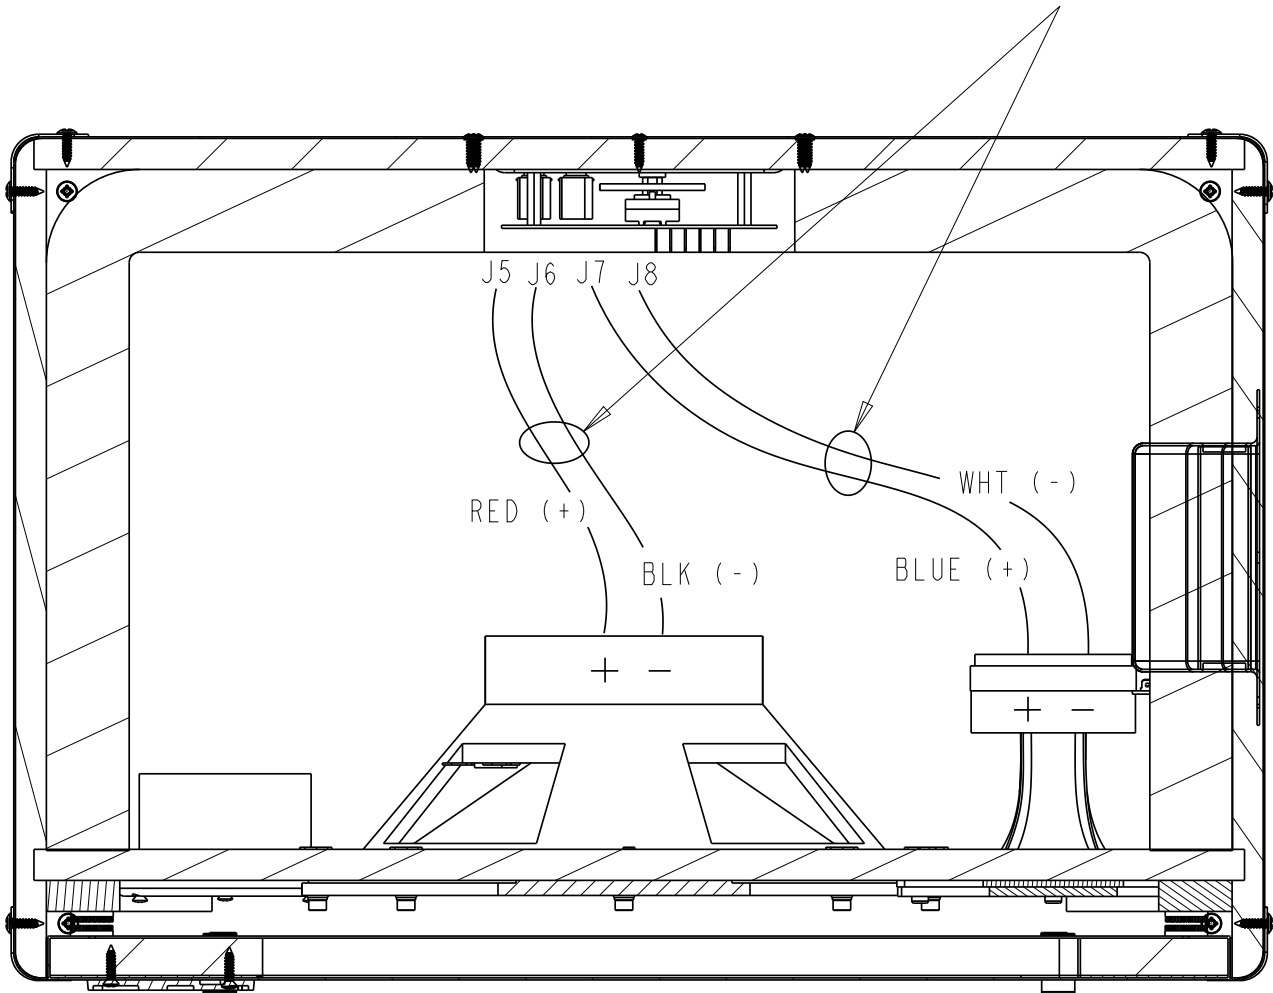


Series	Classic
Model	SVT-15E
Type	1x15" enclosure
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	86-511-08
Woofer Power Handling	200 Watts
See Also	SVT-15EN

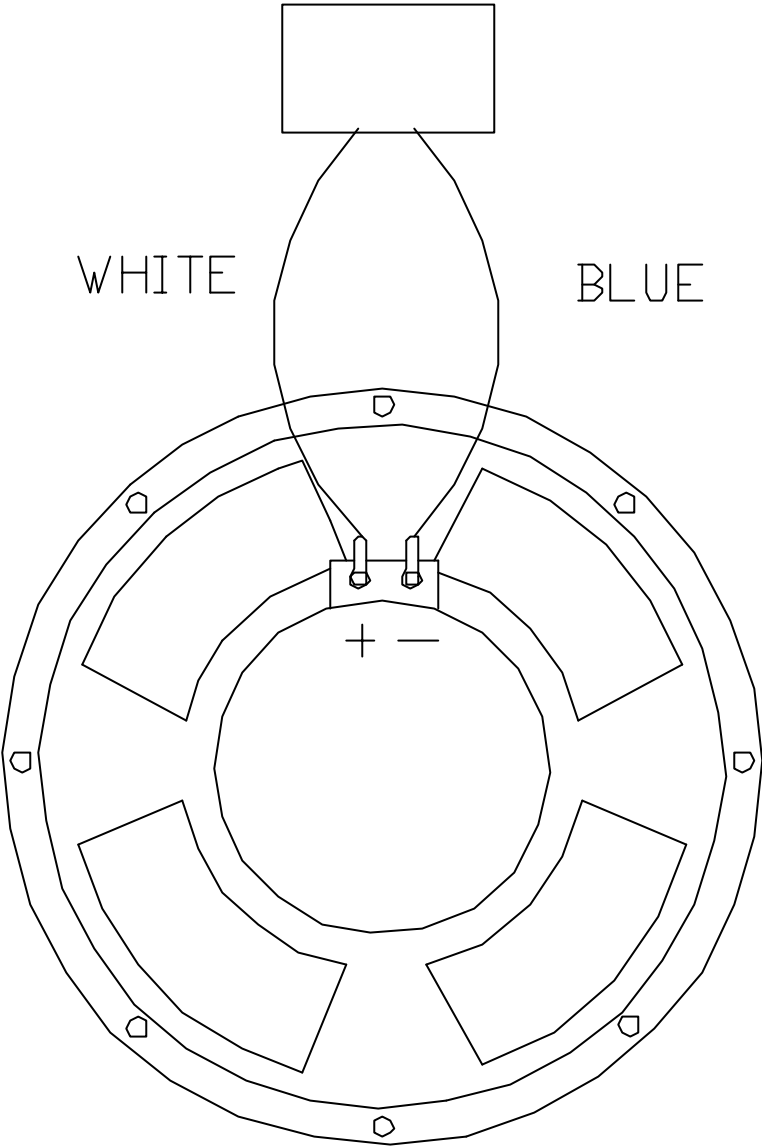


Series	Heritage
Model	HSVT-810E, HSVT-810AV
Type	8x10" /Dual 4x10 enclosure
Cabinet Impedance	4 Ohms/ Dual 8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-032-01-9
Woofer Power Handling	150 Watts

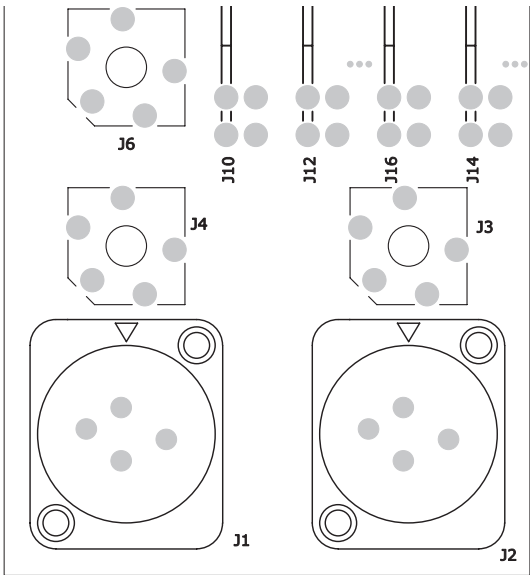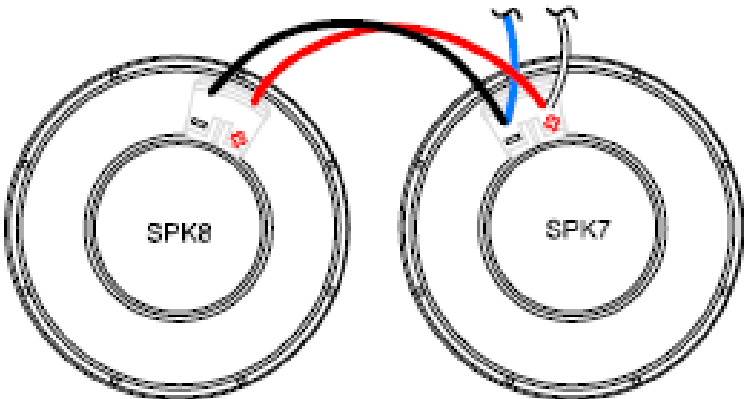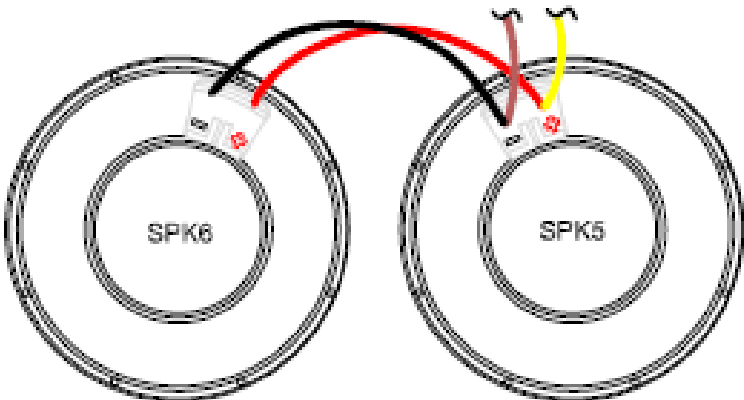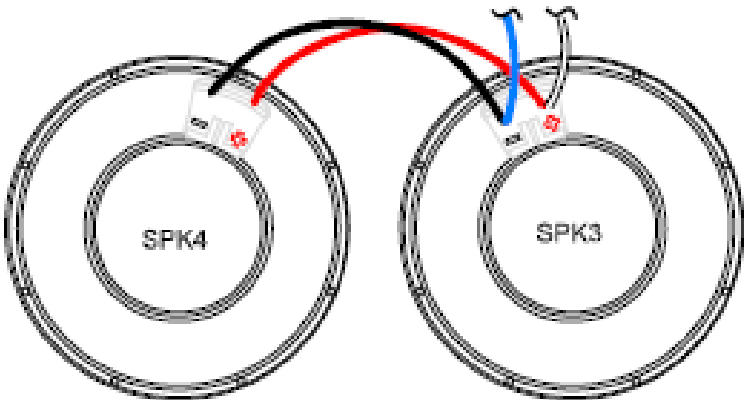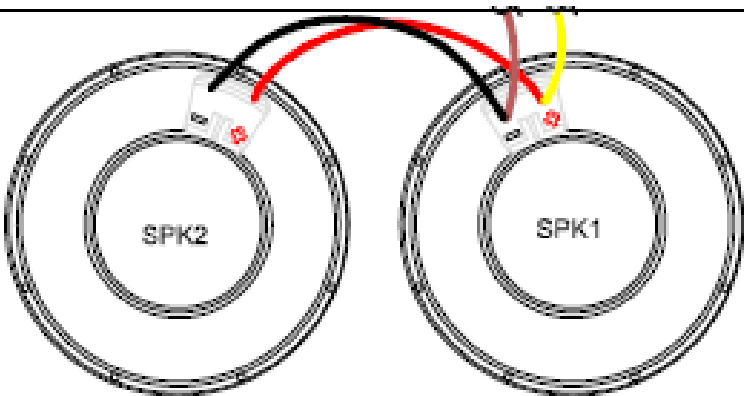

TOP SIDE SHOWN

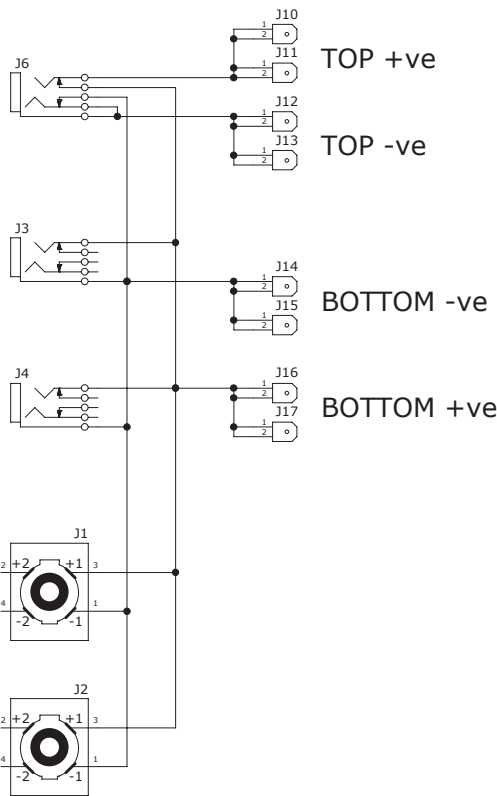


Series	Classic
Model	HSVT-410HLF
Type	4x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-510-04-9
Woofer Power Handling	100 Watts
Tweeter Part Number	A2034066

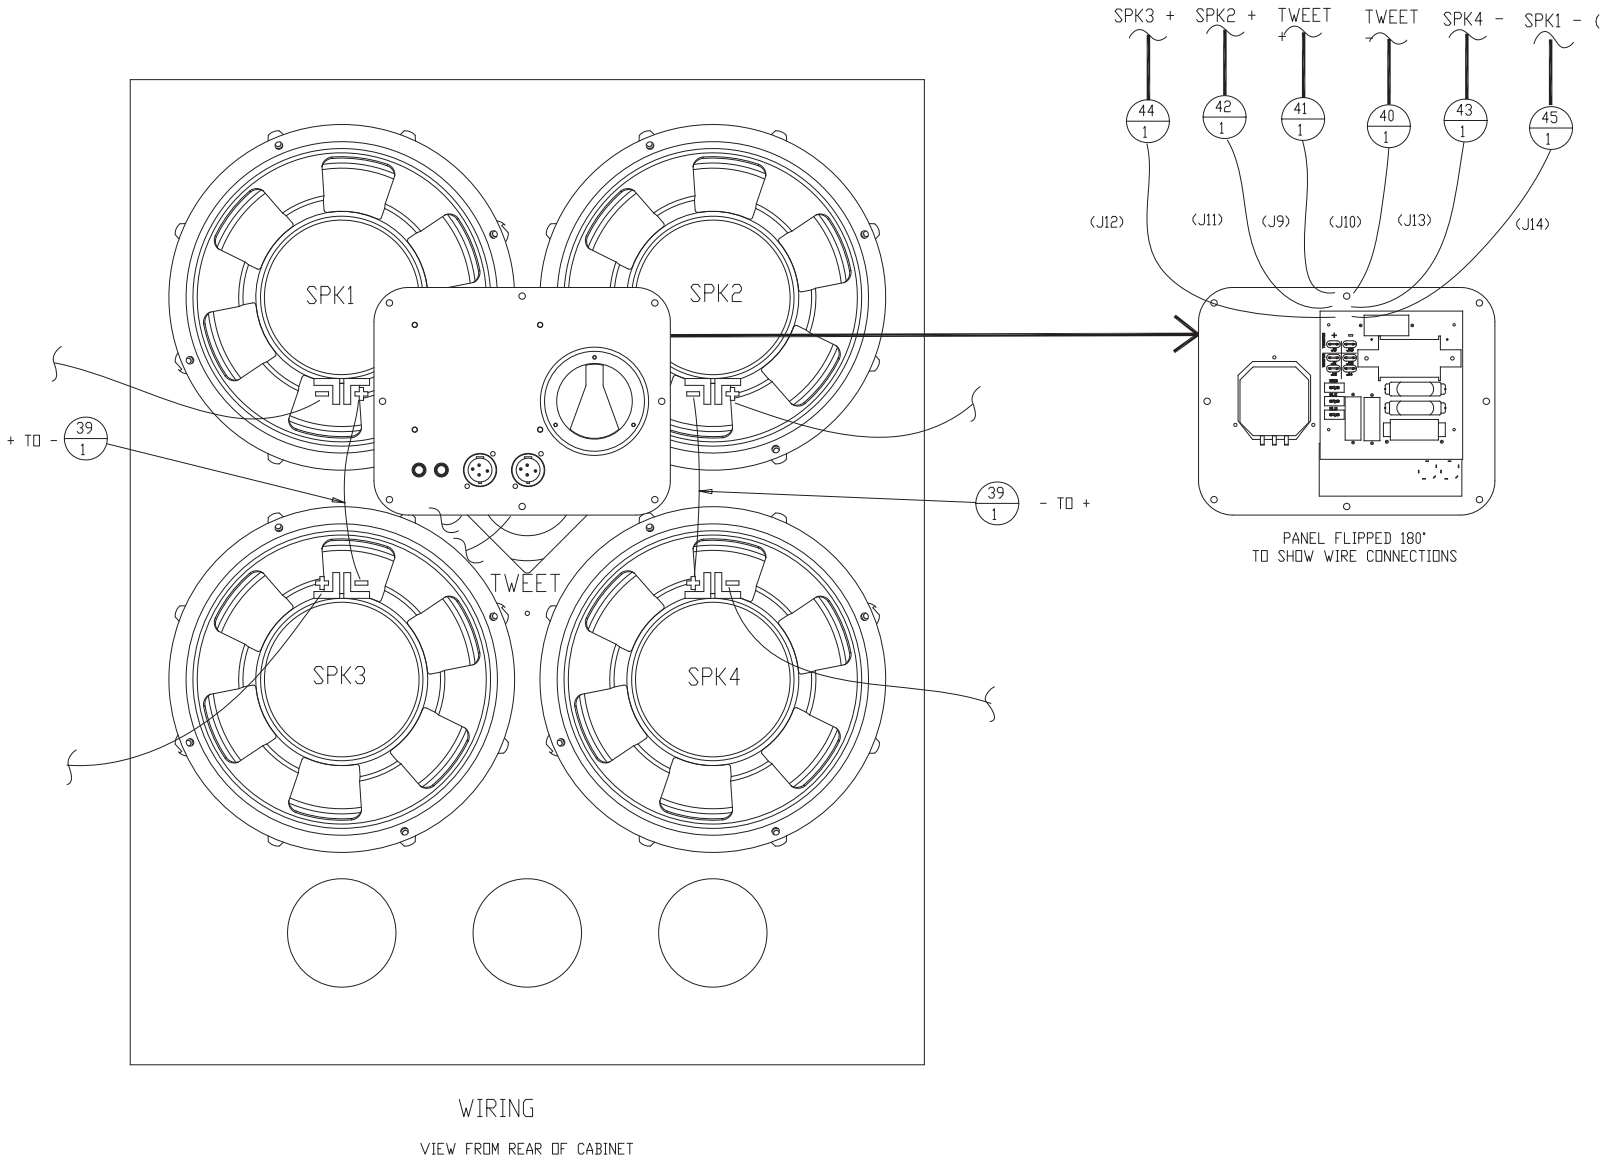


Series	Portaflex
Model	PF-410HLF
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Wiring	Series/Parallel
Woofer Part Number	A2039238
Woofer Power Handling	200 Watts
Tweeter Part Number	86-515-08


BACK VIEW
SOME COMPONENTS REMOVED FOR CLARITY

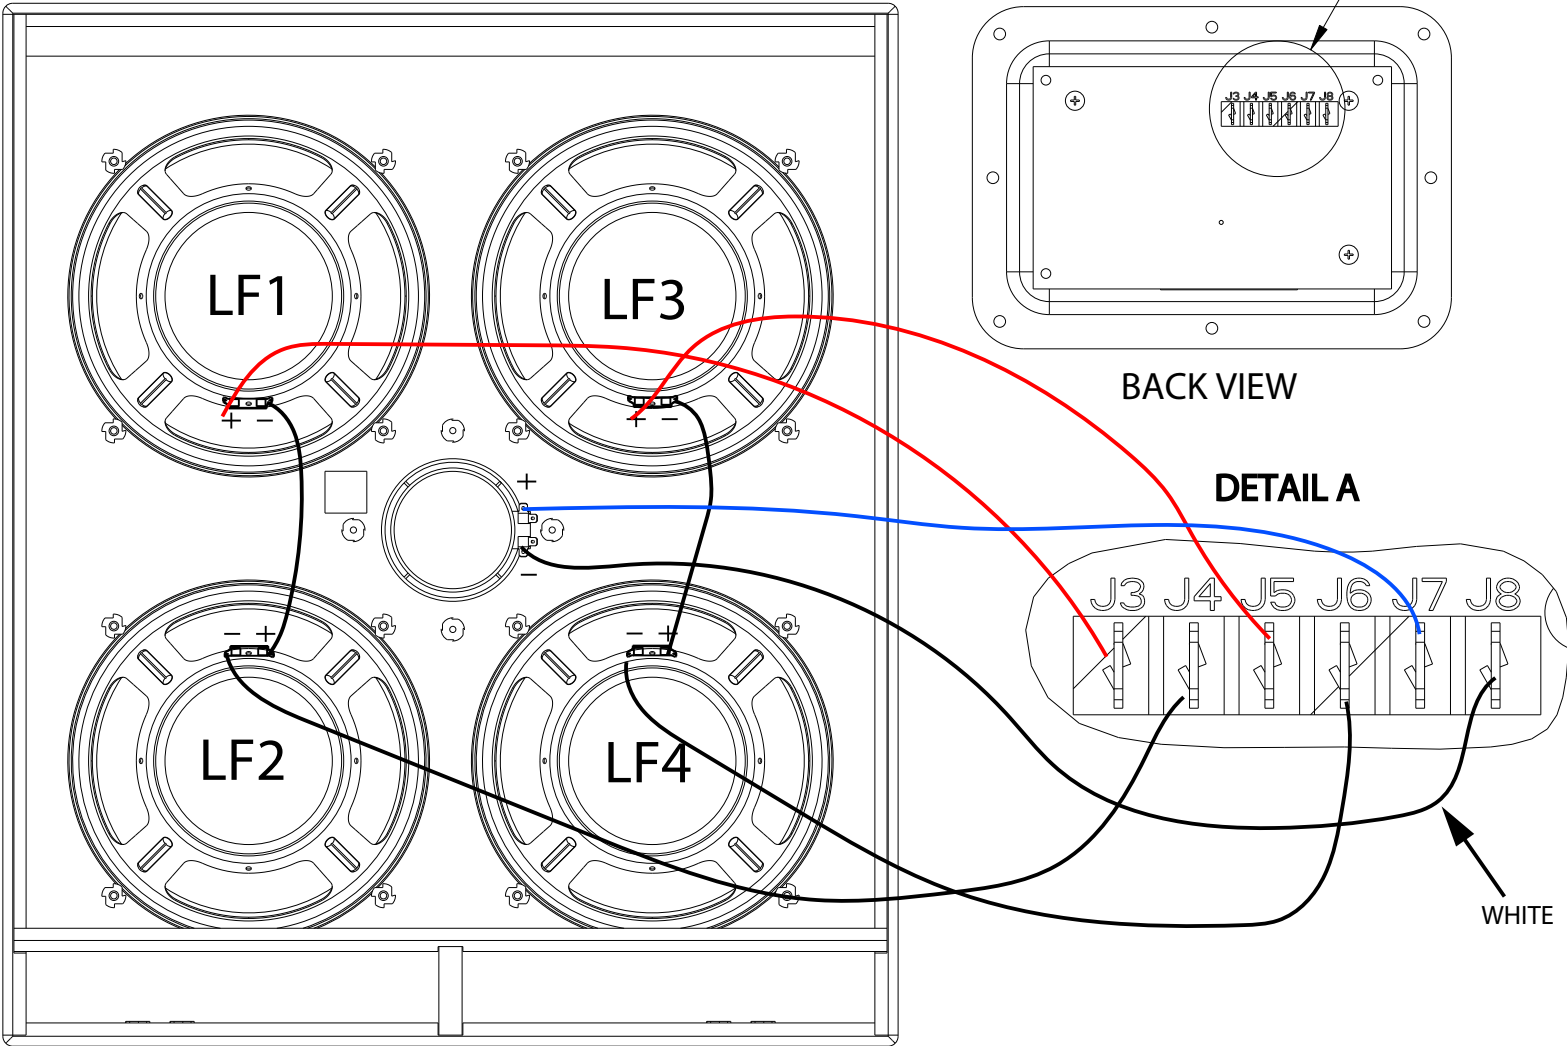


Series	Portaflex
Model	PF-210HE
Type	2x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	16 Ohms
Wiring	Parallel
Woofer Part Number	A2035734
Woofer Power Handling	200 Watts
Tweeter Part Number	86-515-08

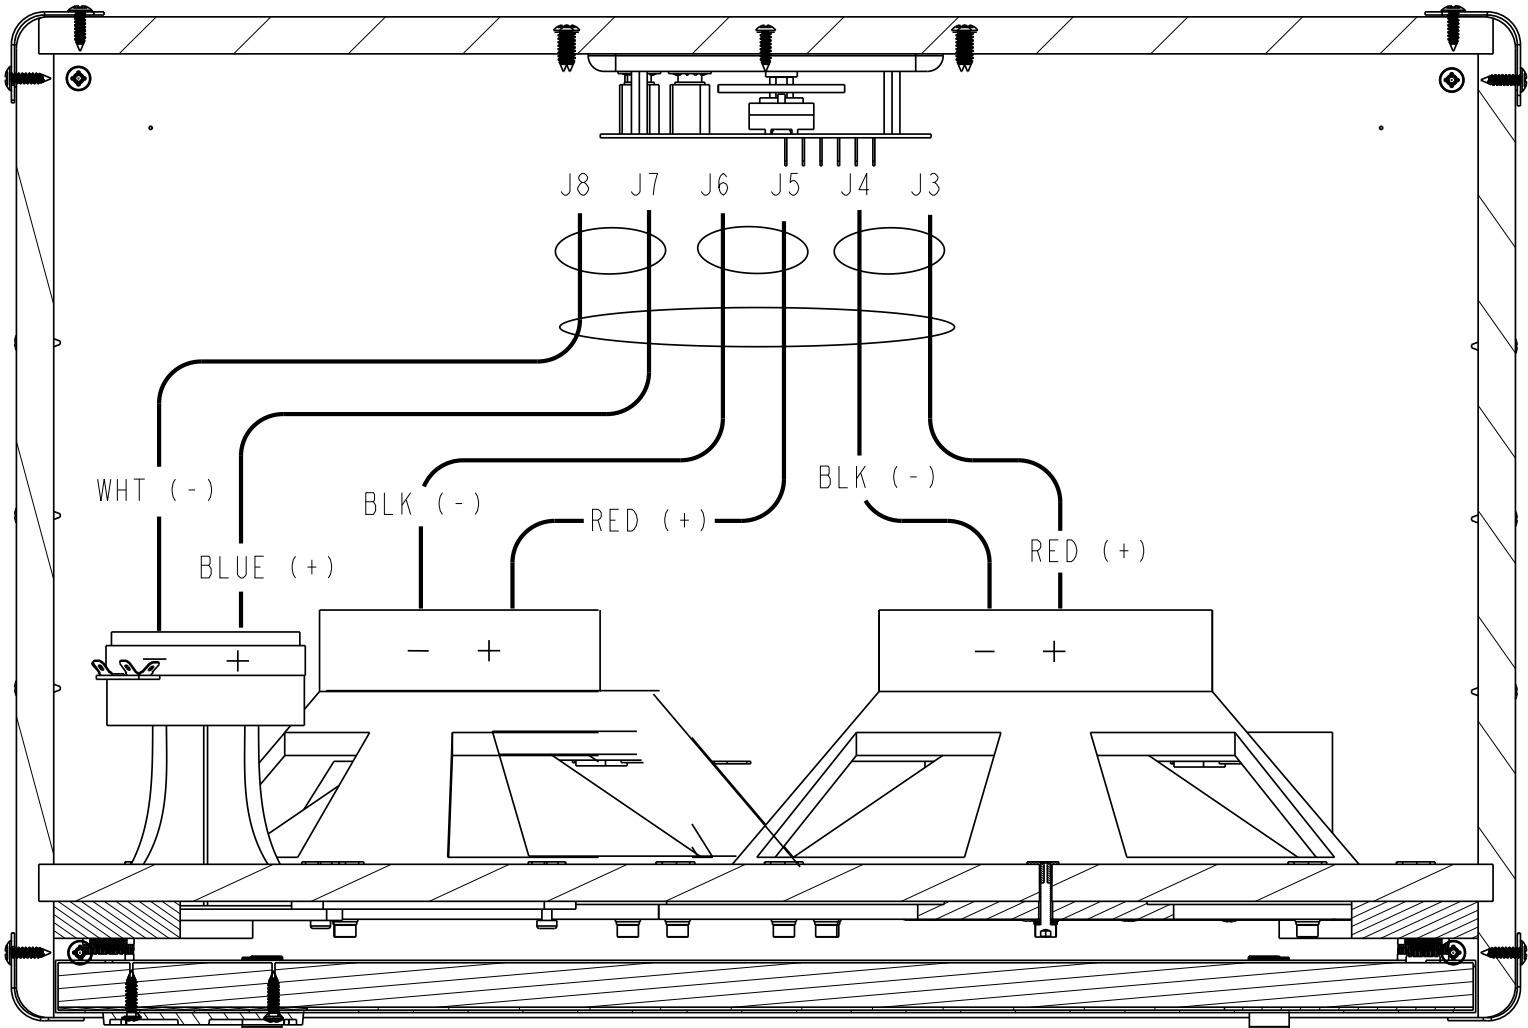


Series	Portaflex
Model	PF-115HE
Type	1x15" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	A2035735
Woofer Power Handling	400 Watts
Tweeter Part Number	86-515-08

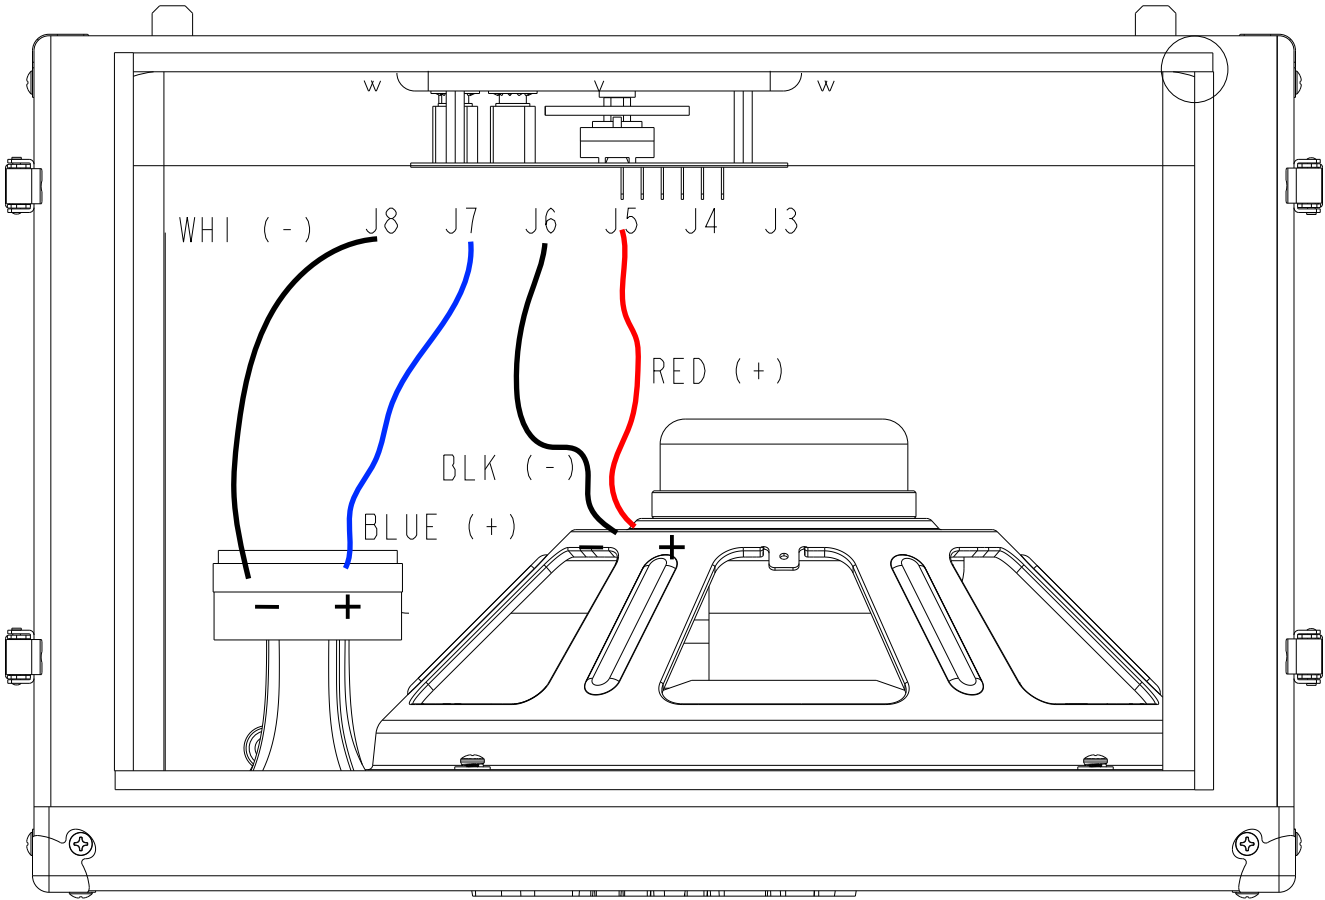


Series	Portaflex
Model	PF-115LF
Type	1x15" enclosure
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	A2035735
Woofer Power Handling	400 Watts

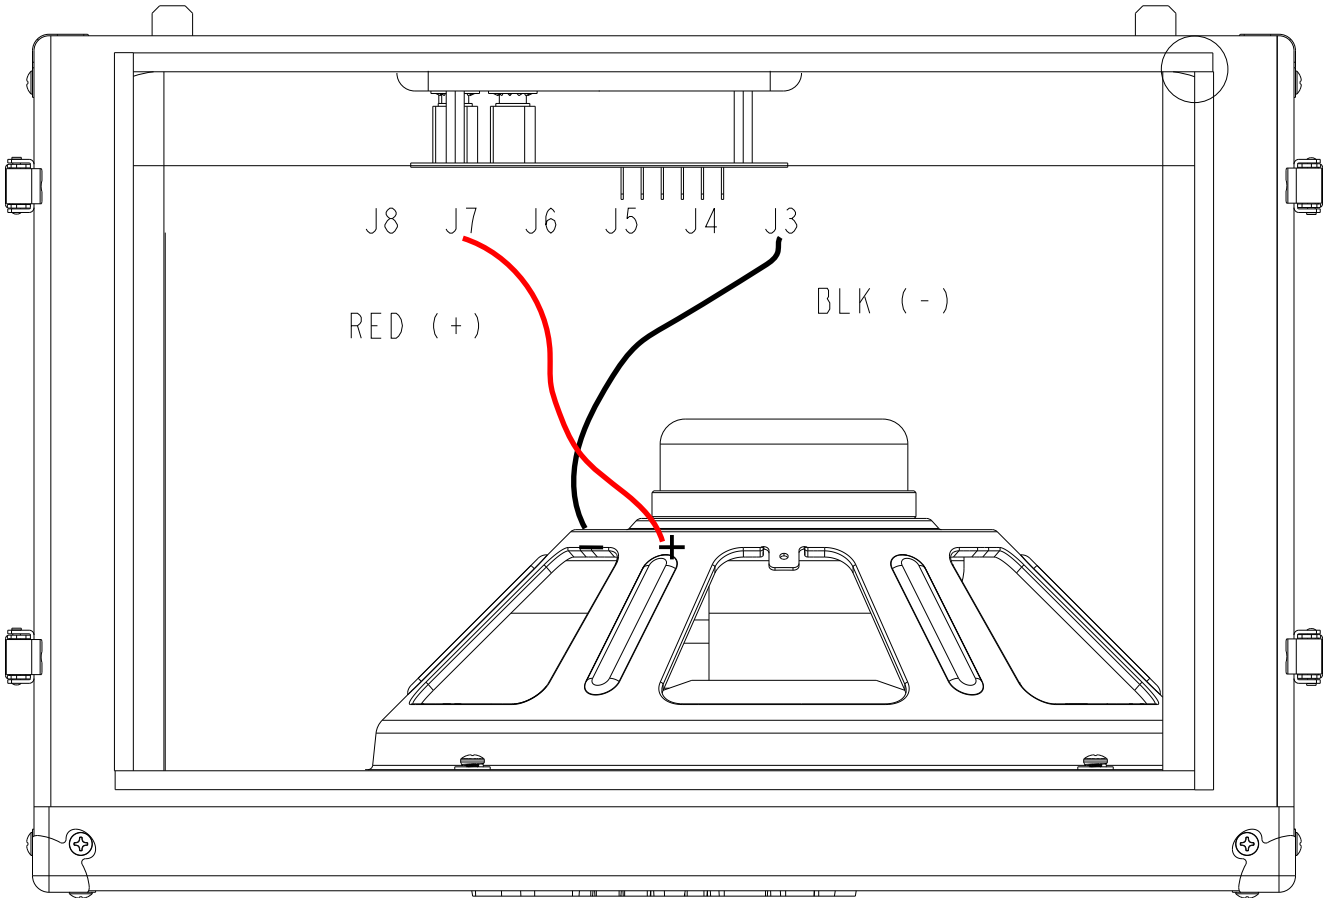



Series	Portaflex
Model	PF-112HLF
Type	1x12" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	A2043217
Woofer Power Handling	200 Watts
Tweeter Part Number	86-515-08

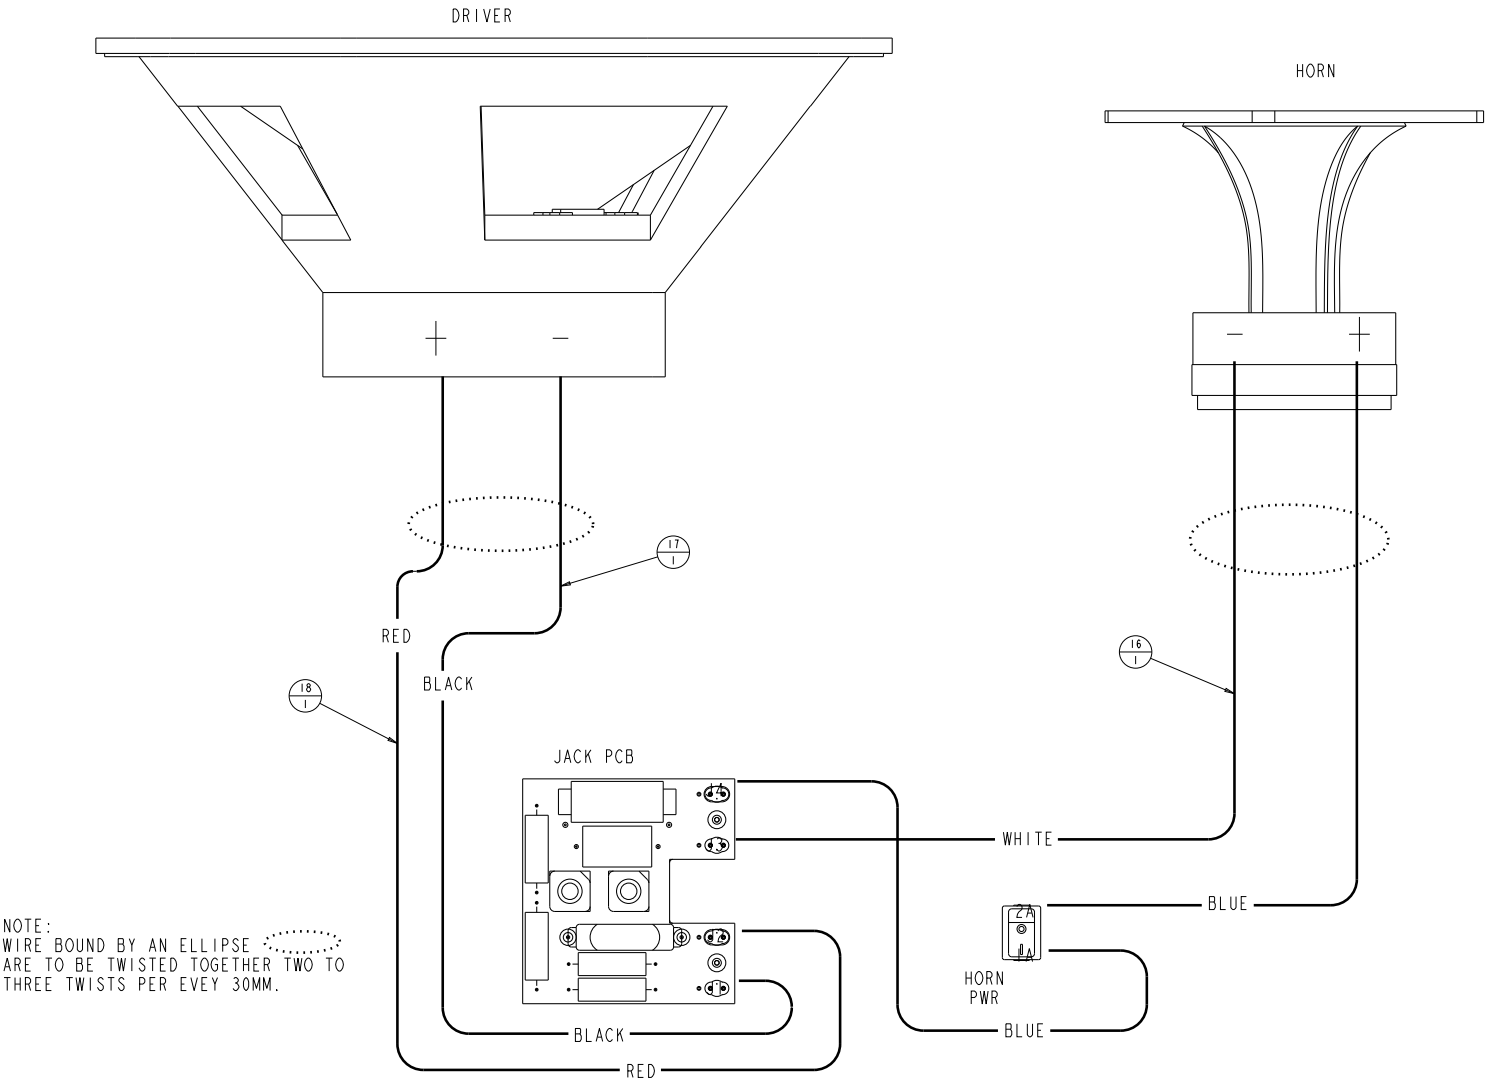


Series	Venture
Model	VB-88
Type	8x8" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	11-20-0062
Woofer Power Handling	200 Watts
Tweeter Part Number	11-20-0061

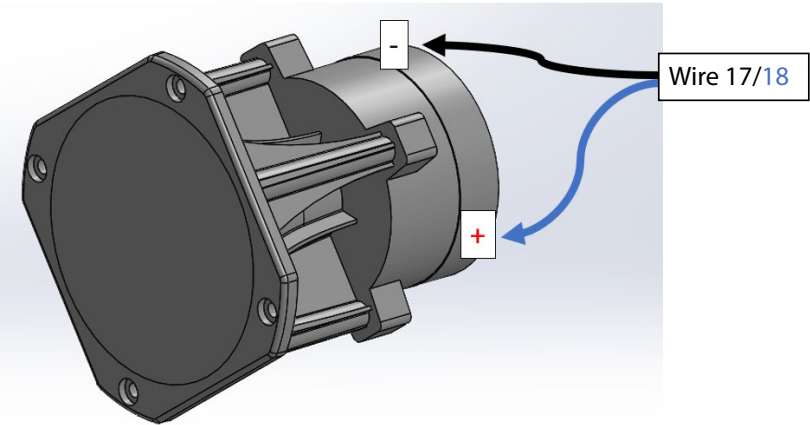


Wire No. Shown for Reference

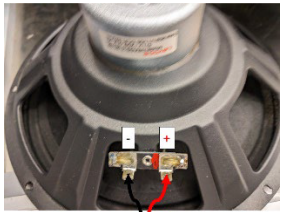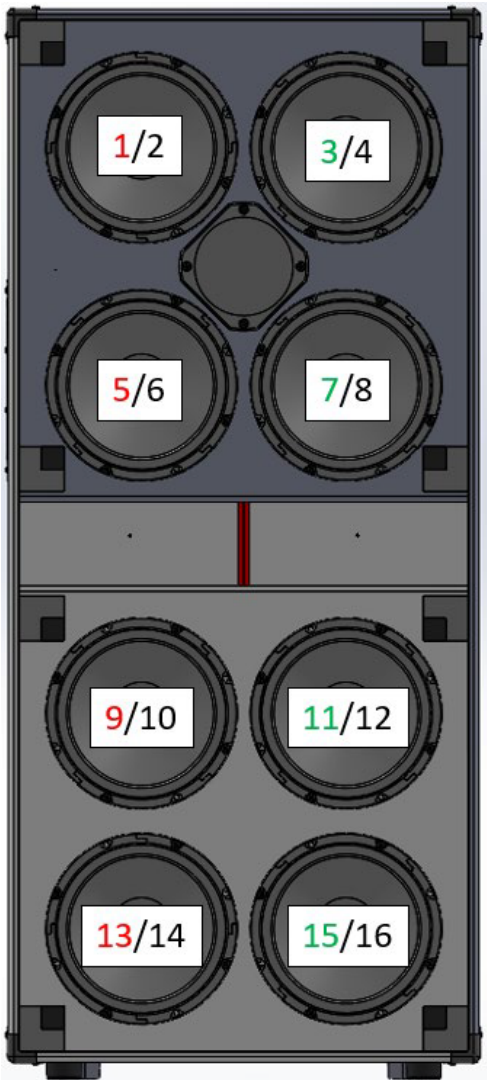


Wire 1/2

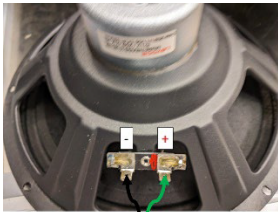


Wire 3/4

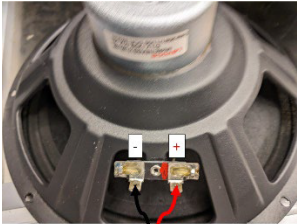


Wire 5/6

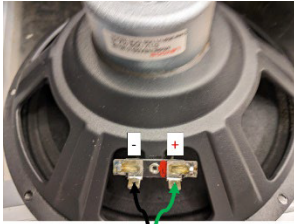


Wire 7/8




Wire 9/10

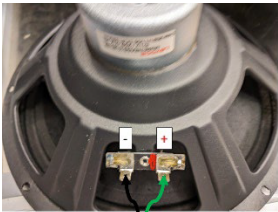

Wire 11/12





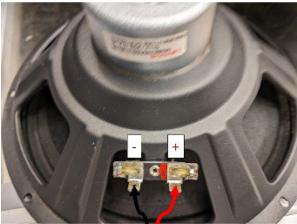


Wire 13/14



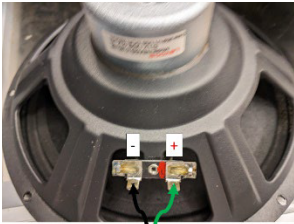


Wire 15/16



Series	Venture
Model	VB-410
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	11-20-0064
Woofer Power Handling	150 Watts
Tweeter Part Number	11-20-0061

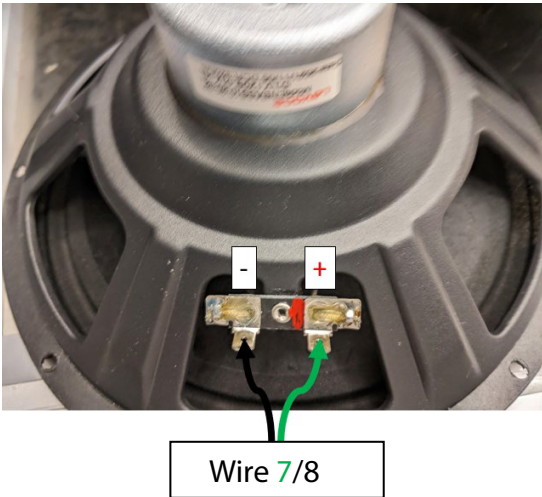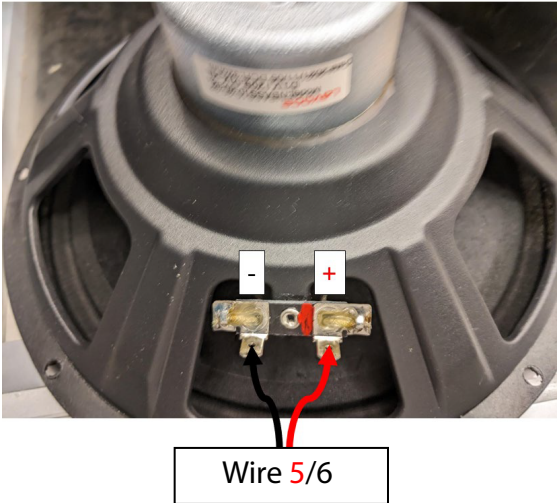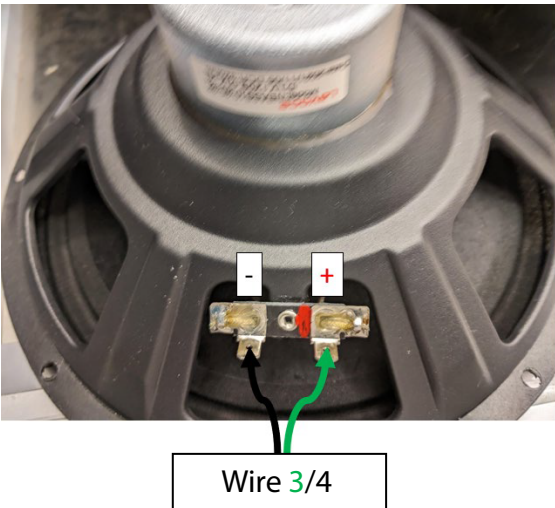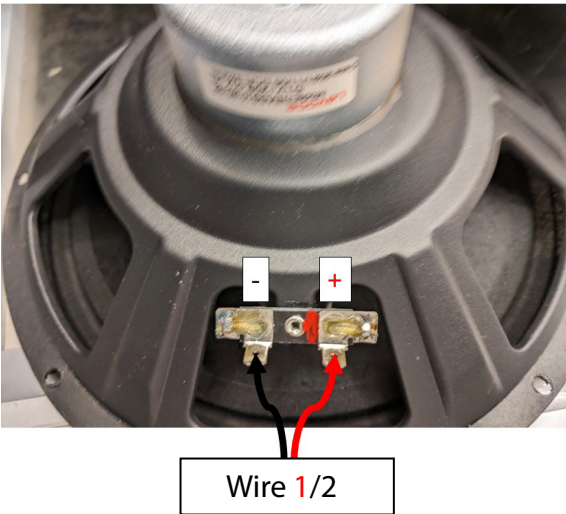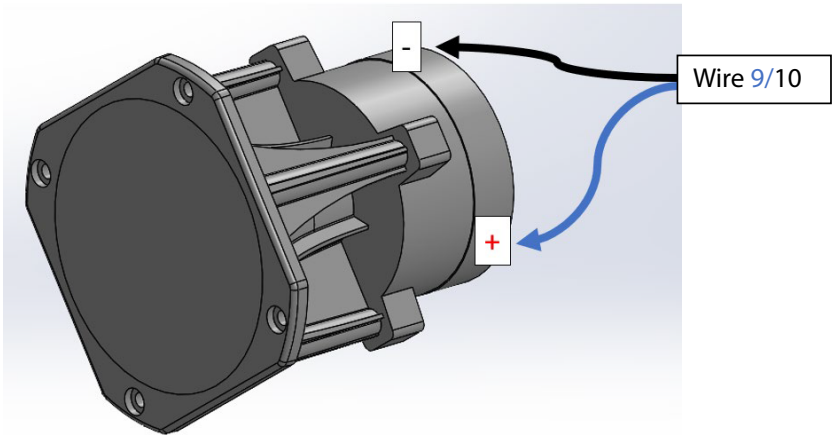


Series	Venture
Model	VB-212
Type	2x12" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	16 Ohms
Wiring	Parallel
Woofer Part Number	11-20-0063
Woofer Power Handling	250 Watts
Tweeter Part Number	11-20-0061

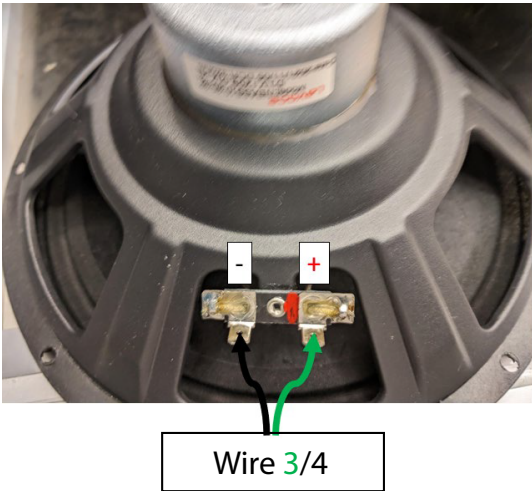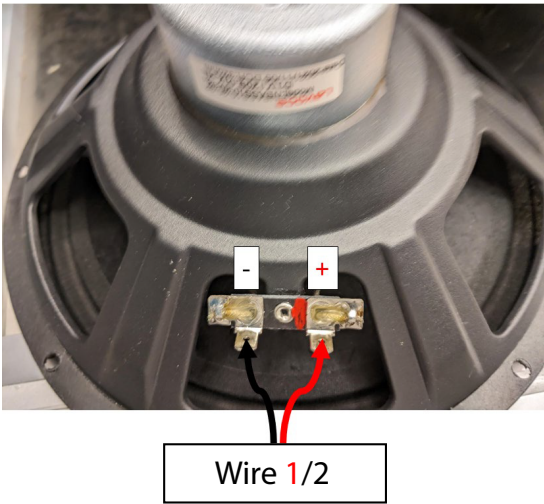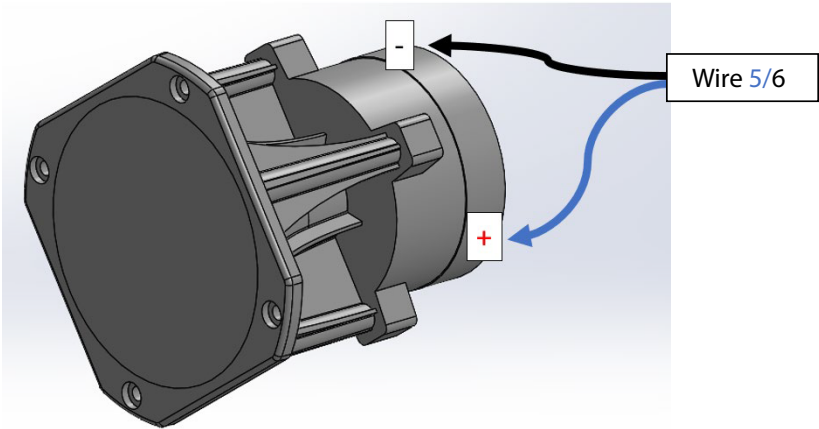

Series	Venture
Model	VB-210
Type	2x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	11-20-0058
Woofer Power Handling	150 Watts
Tweeter Part Number	11-20-0061

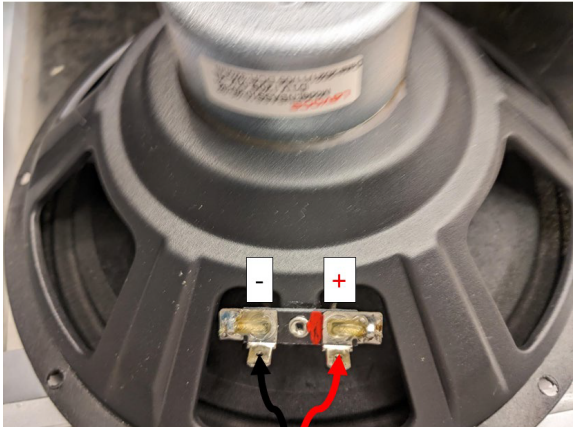
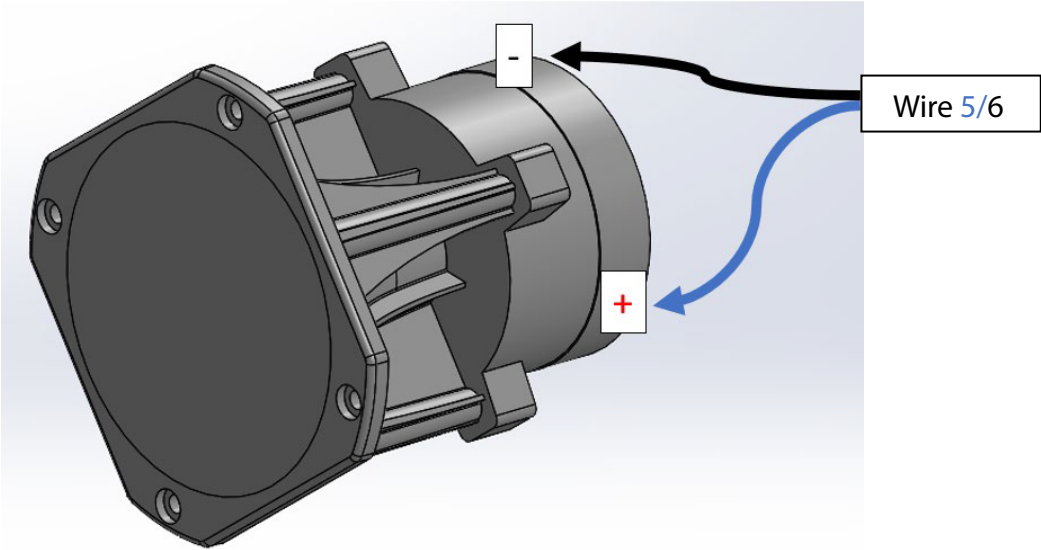


Wire 1/2


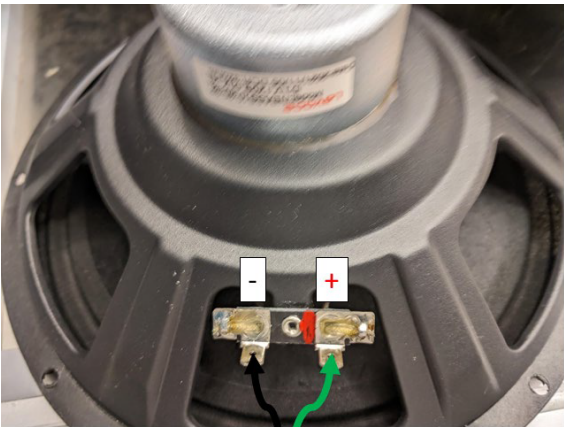


Wire 3/4

Series	Venture
Model	VB-115
Type	1x15" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	11-20-0058
Woofer Power Handling	250 Watts
Tweeter Part Number	11-20-0061

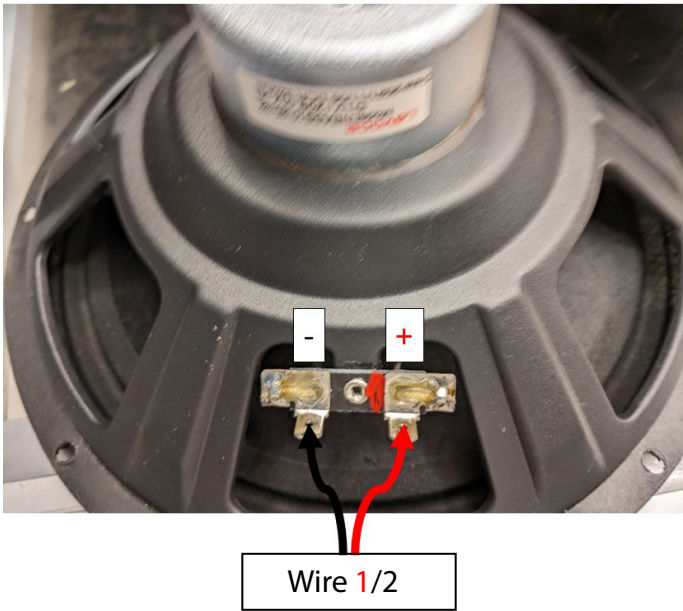
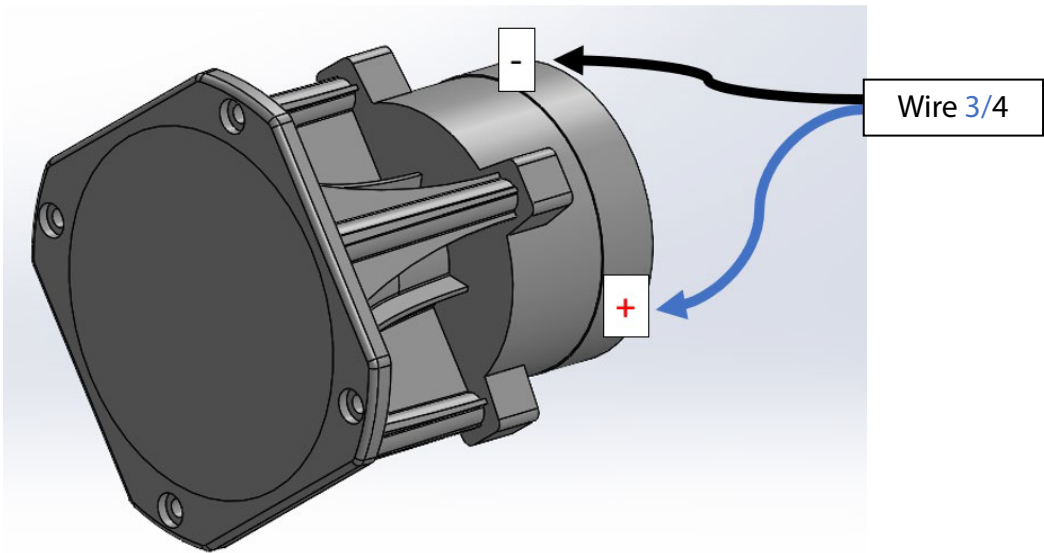


Series	Venture
Model	VB-112
Type	1x12" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	11-20-0059
Woofer Power Handling	250 Watts
Tweeter Part Number	11-20-0061

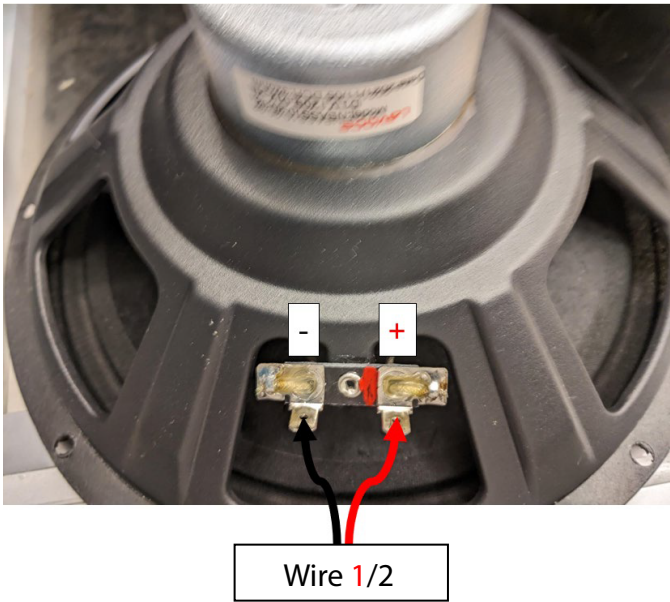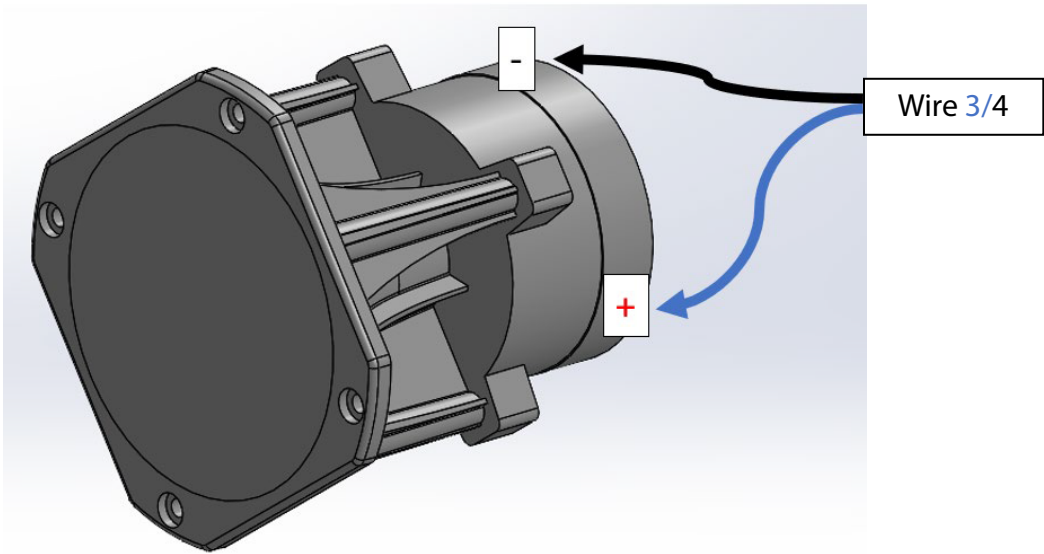


Series	Pro Neo
Model	PN-410HLF
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	A2033949
Woofer Power Handling	200 Watts
Tweeter Part Number	A2034027

Group 1= J9 - red, J10 - black
Group 2 = J11 - blue, J13 - white,
LF1(+)- blue, L1F(-) - white
Group 2 = J12 - yellow, J13 - orange,
LF3(+)- yellow, LF3(-) - orange

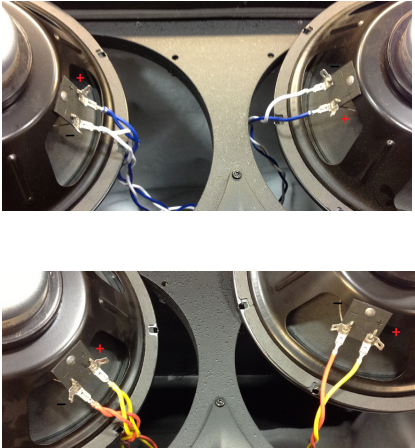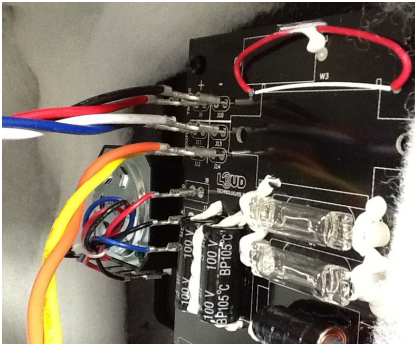


Series	Pro Neo
Model	PN-210HLF
Type	2x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	16 Ohms
Wiring	Parallel
Woofer Part Number	A2033948
Woofer Power Handling	200 Watts
Tweeter Part Number	A2034177

Group 1= J9 - red, J10 - black
Group 2 = J11 - blue, J13 - white,
LF1(+) - blue, L1F(-) - white
Group 2 = J12 - yellow, J13 - orange,
LF2(+) - yellow, LF2(-) - orange

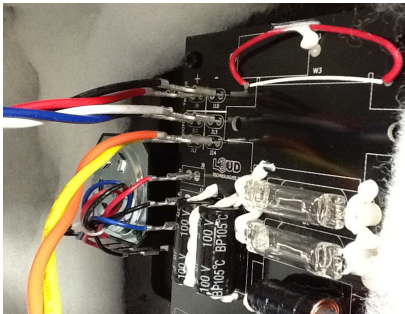


Series	Pro Neo
Model	PN-115HLF
Type	1x15" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	A2033950
Woofer Power Handling	400 Watts
Tweeter Part Number	A2034027


Group 1= J9 - red, J10 - black
Group 2 = J11 - blue, J13 - white,
LF1(+) - blue, L1F(-) - white

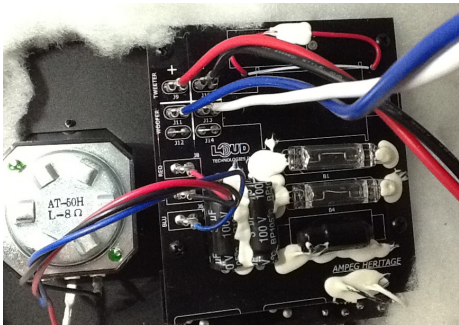


Series	B410H
Model	B-410HE
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-132-08
Woofer Power Handling	50 Watts
Tweeter Part Number	86-515-08

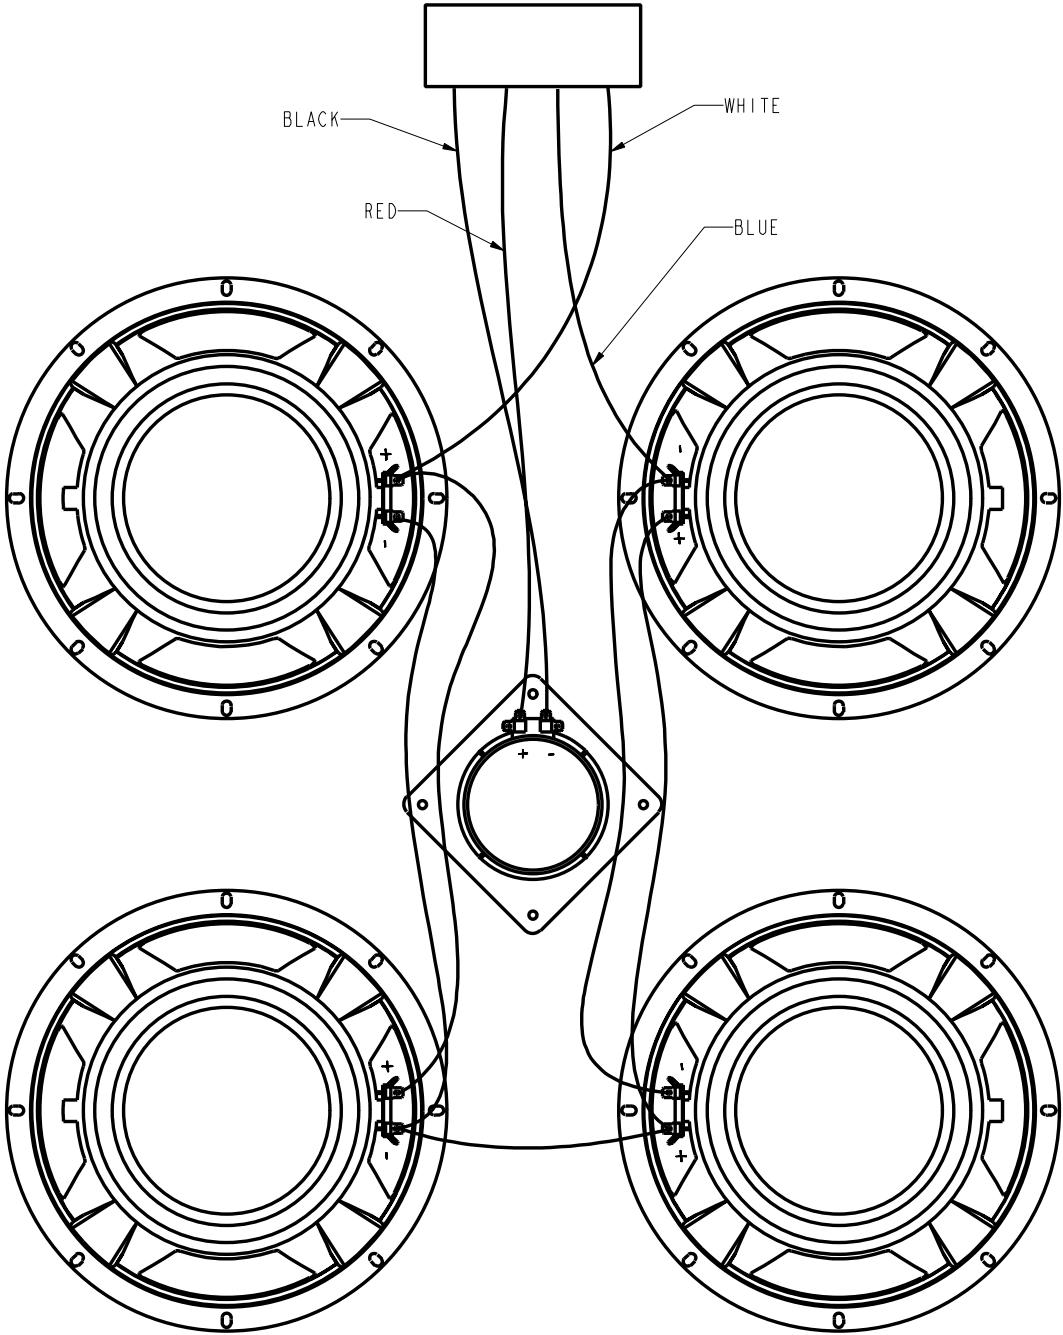


Series	B410H
Model	B-410HLF
Type	4x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-447-04
Woofer Power Handling	100 Watts
Tweeter Part Number	86-515-08

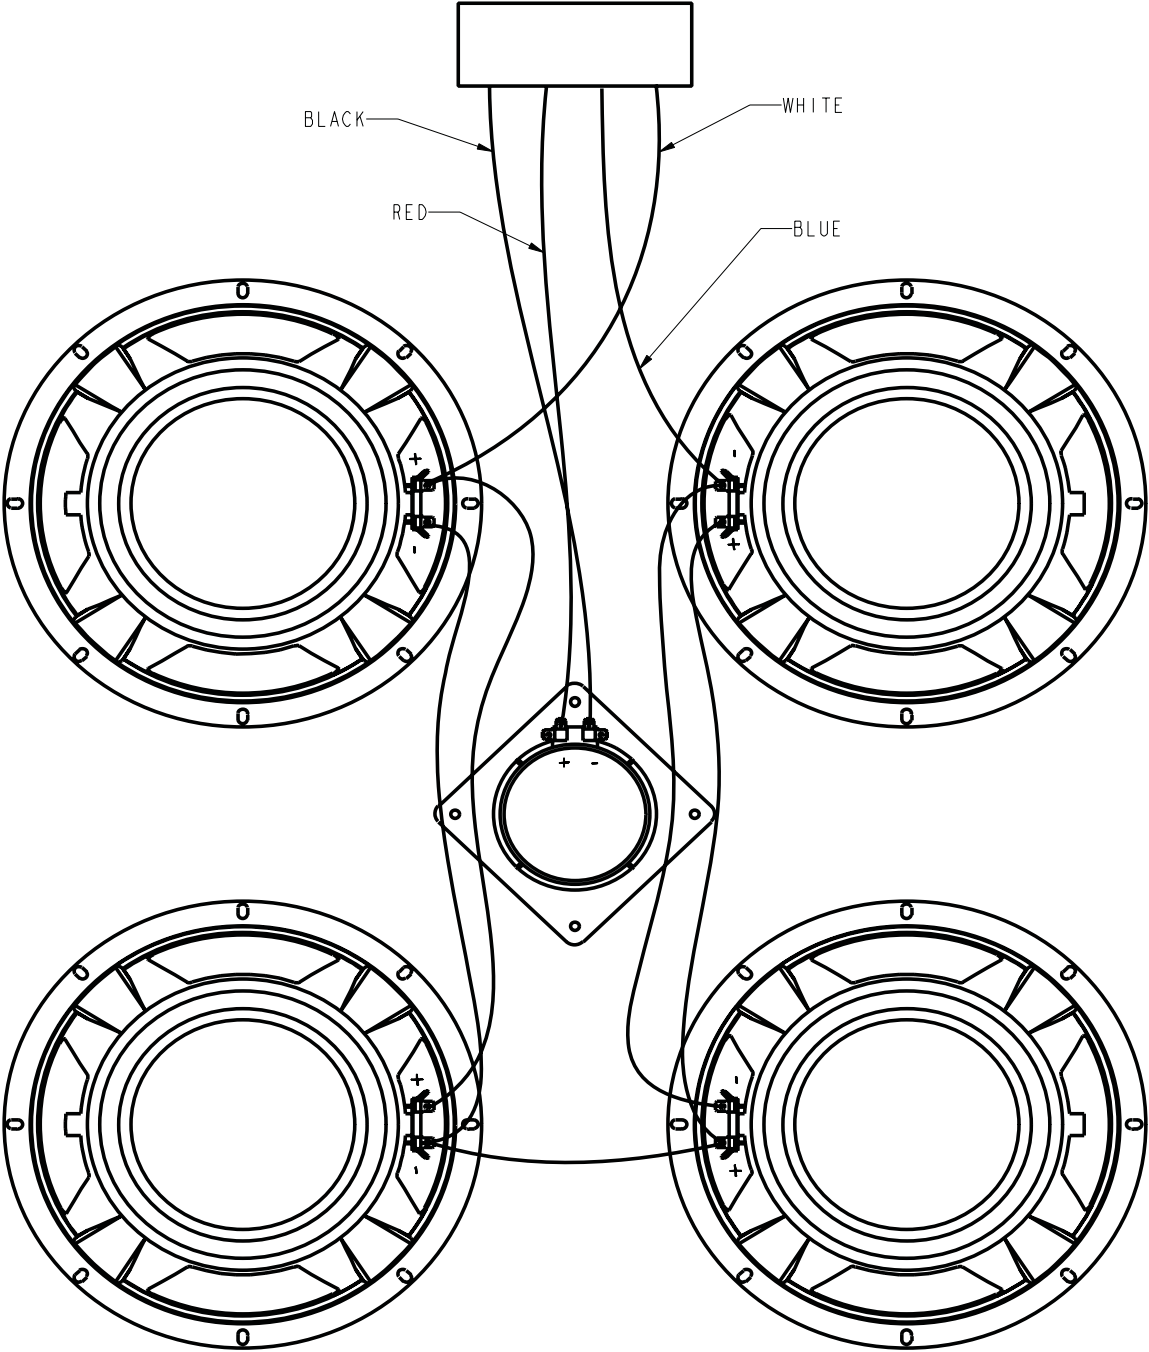


Series	BSE
Model	BSE-410H
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-132-08
Woofer Power Handling	50 Watts
Tweeter Part Number	86-515-08

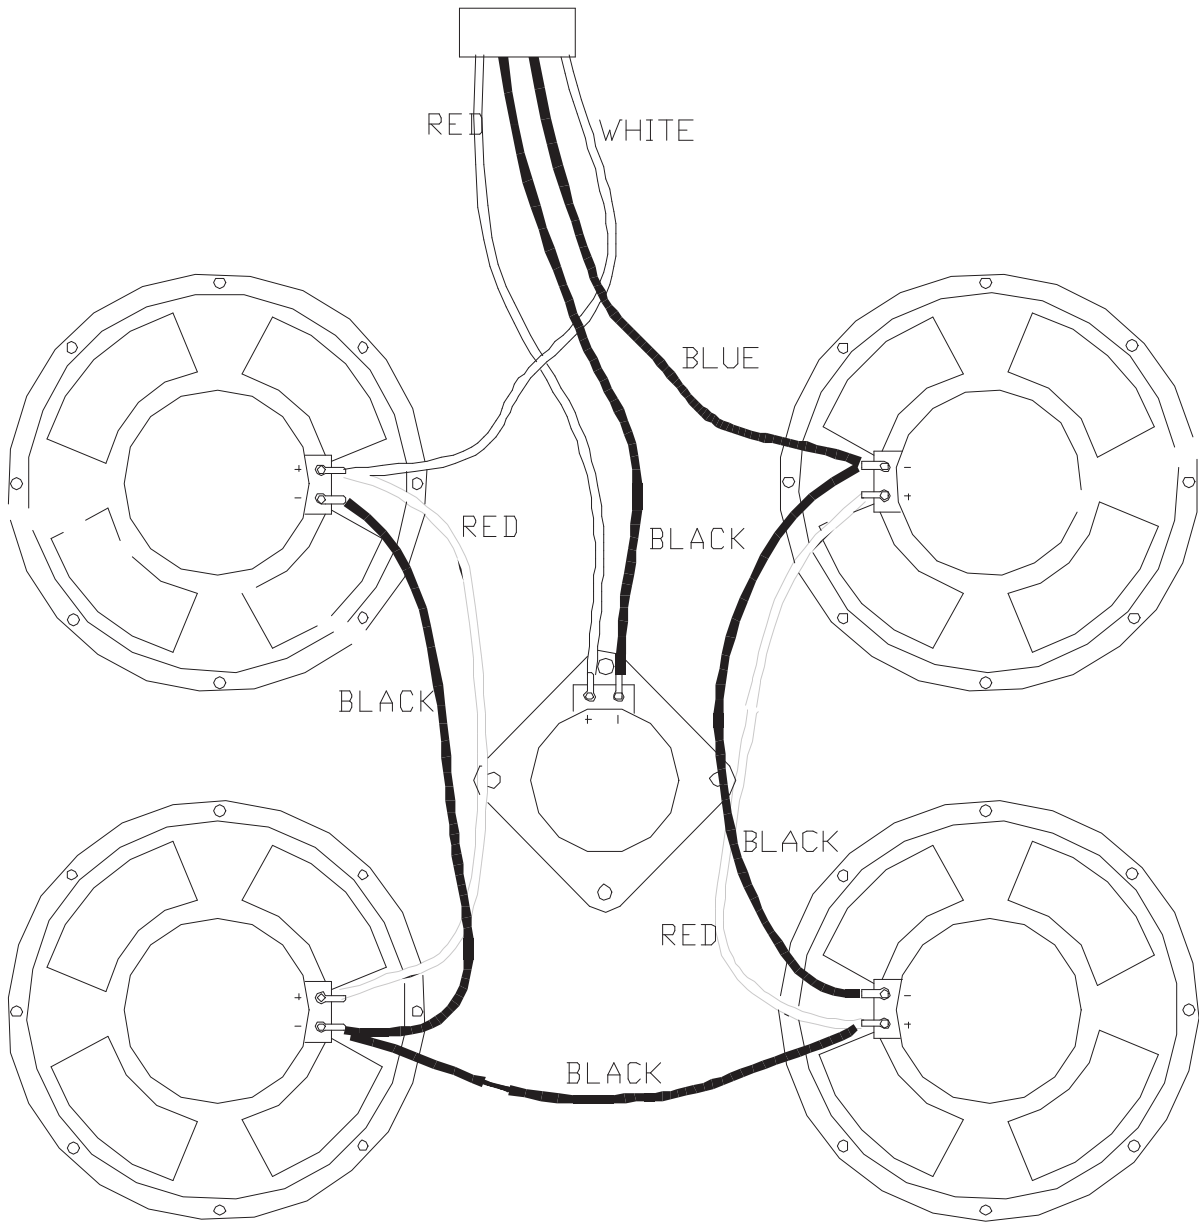

Series	BSE
Model	BSE-410HLF
Type	4x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-510-04
Woofer Power Handling	100 Watts
Tweeter Part Number	86-515-08

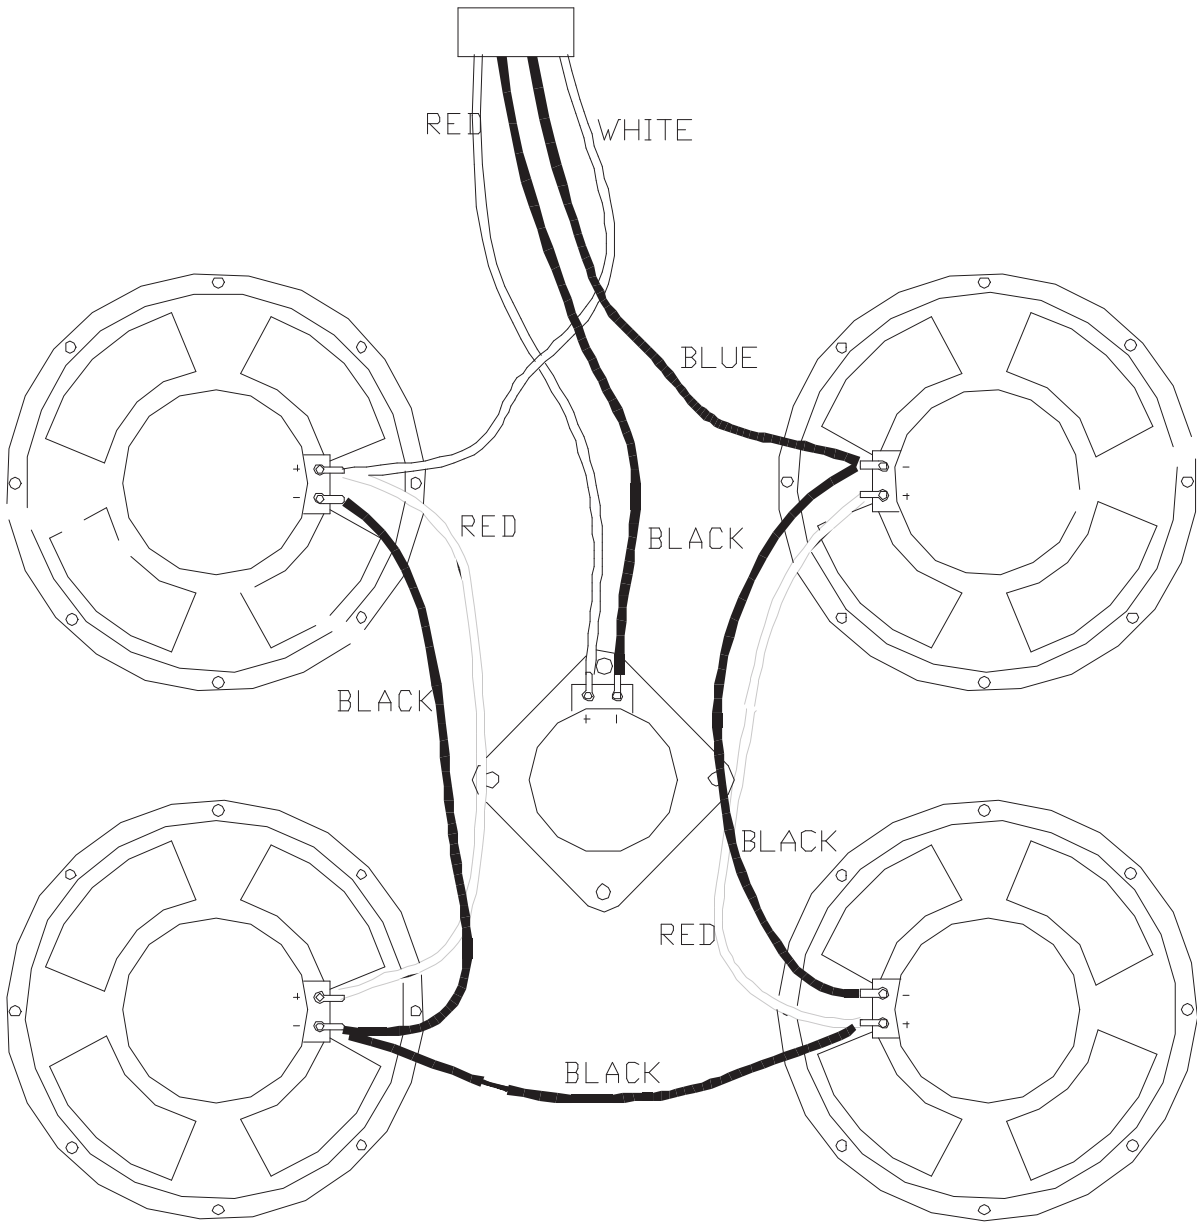


Series	BSE
Model	BSE-410HS
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-032-01
Woofer Power Handling	100 Watts
Tweeter Part Number	86-515-08

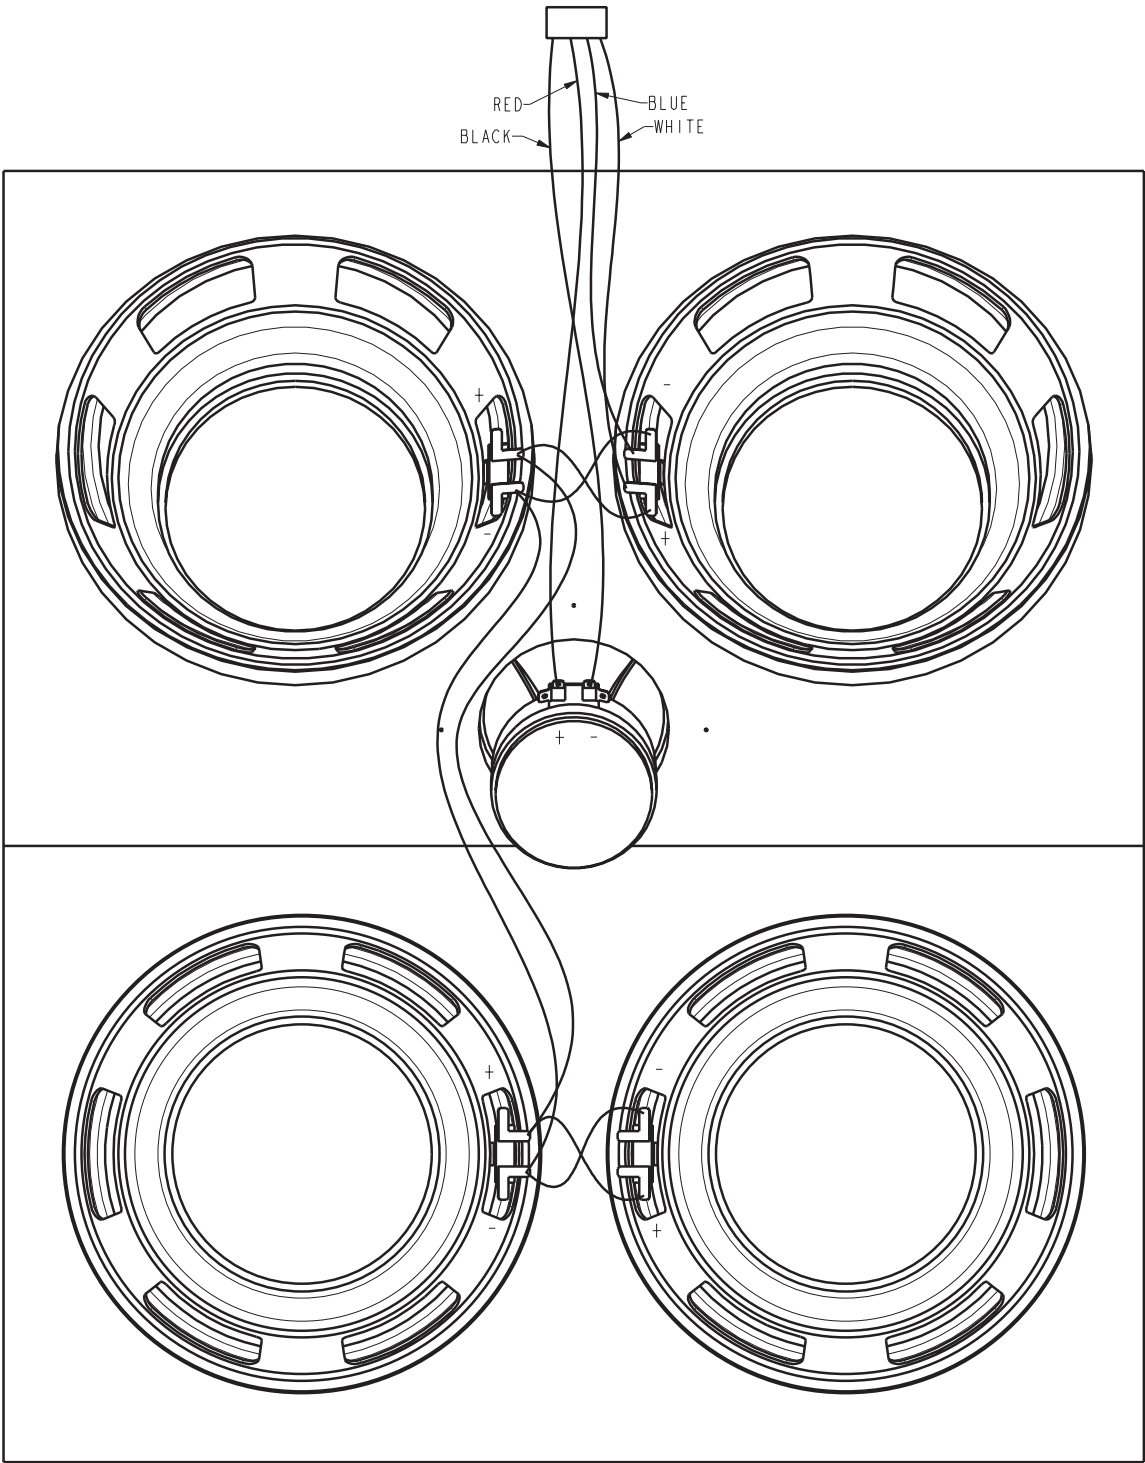


Series	BSE
Model	BSE-115
Type	1x15" enclosure
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	86-118-08
Woofer Power Handling	150 Watts

REAR VIEW

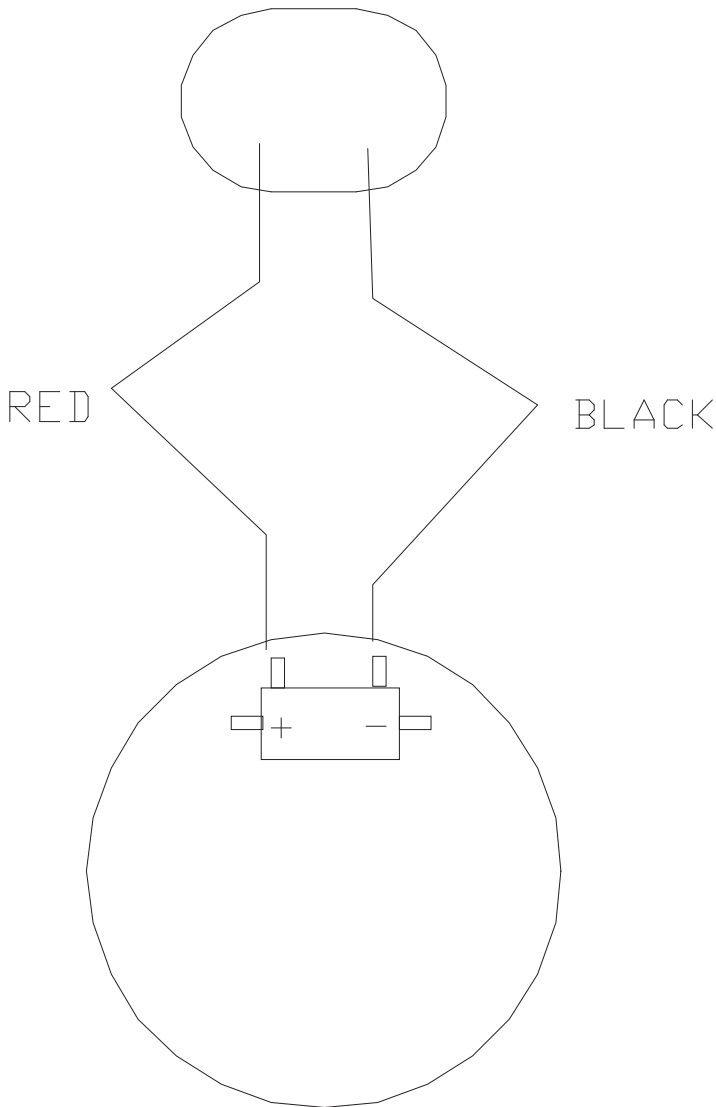


Series	BSE
Model	BSE-115T
Type	1x15" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	86-036-08
Woofer Power Handling	200 Watts
Tweeter Part Number	86-007-01

REAR VIEW

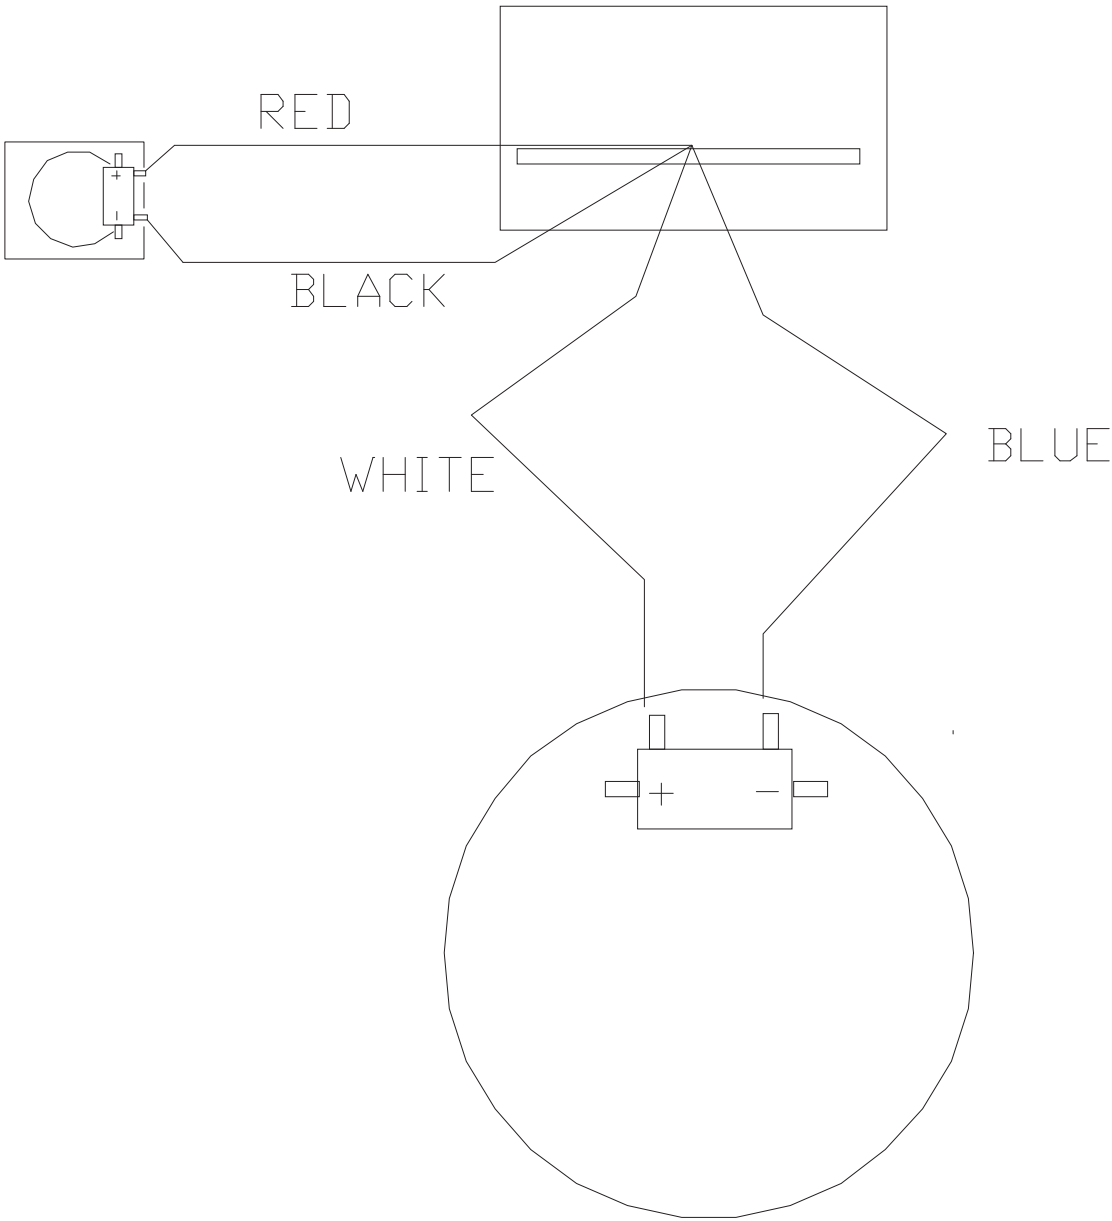


Series	BXT
Model	BXT410HL8
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-531-32
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

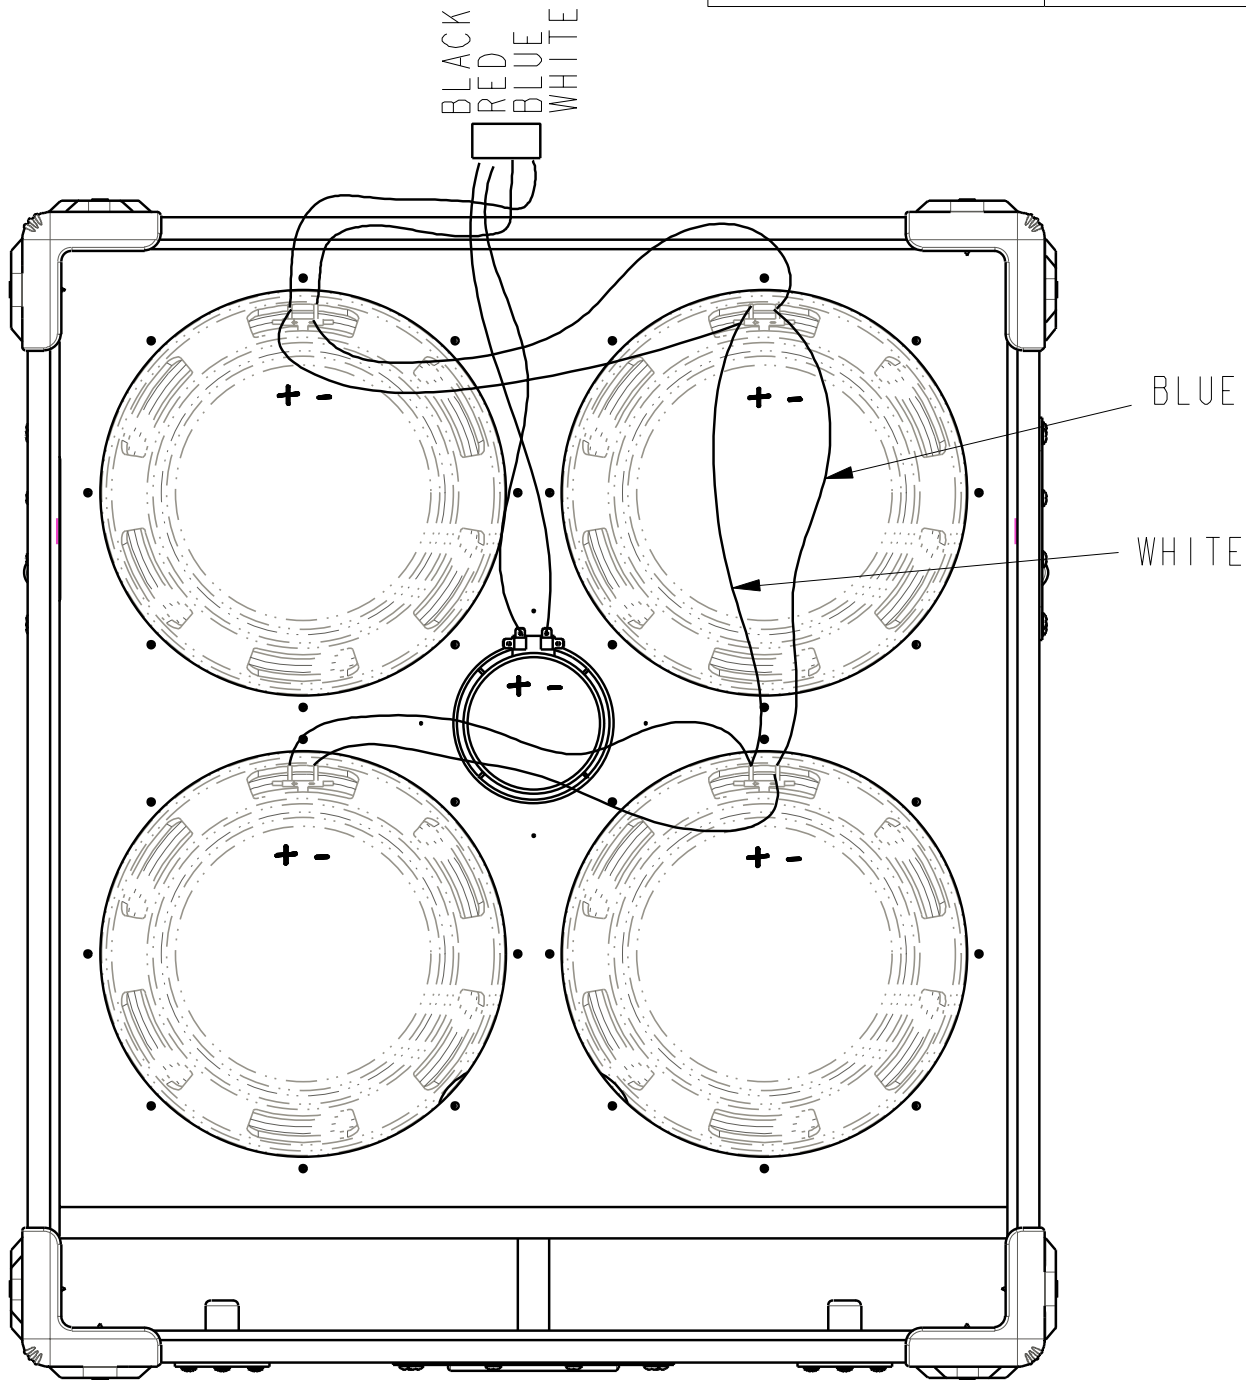


BXT410HL8 SPEAKER HOOKUP

Series	BXT
Model	BXT410HL4
Type	4x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-531-04
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

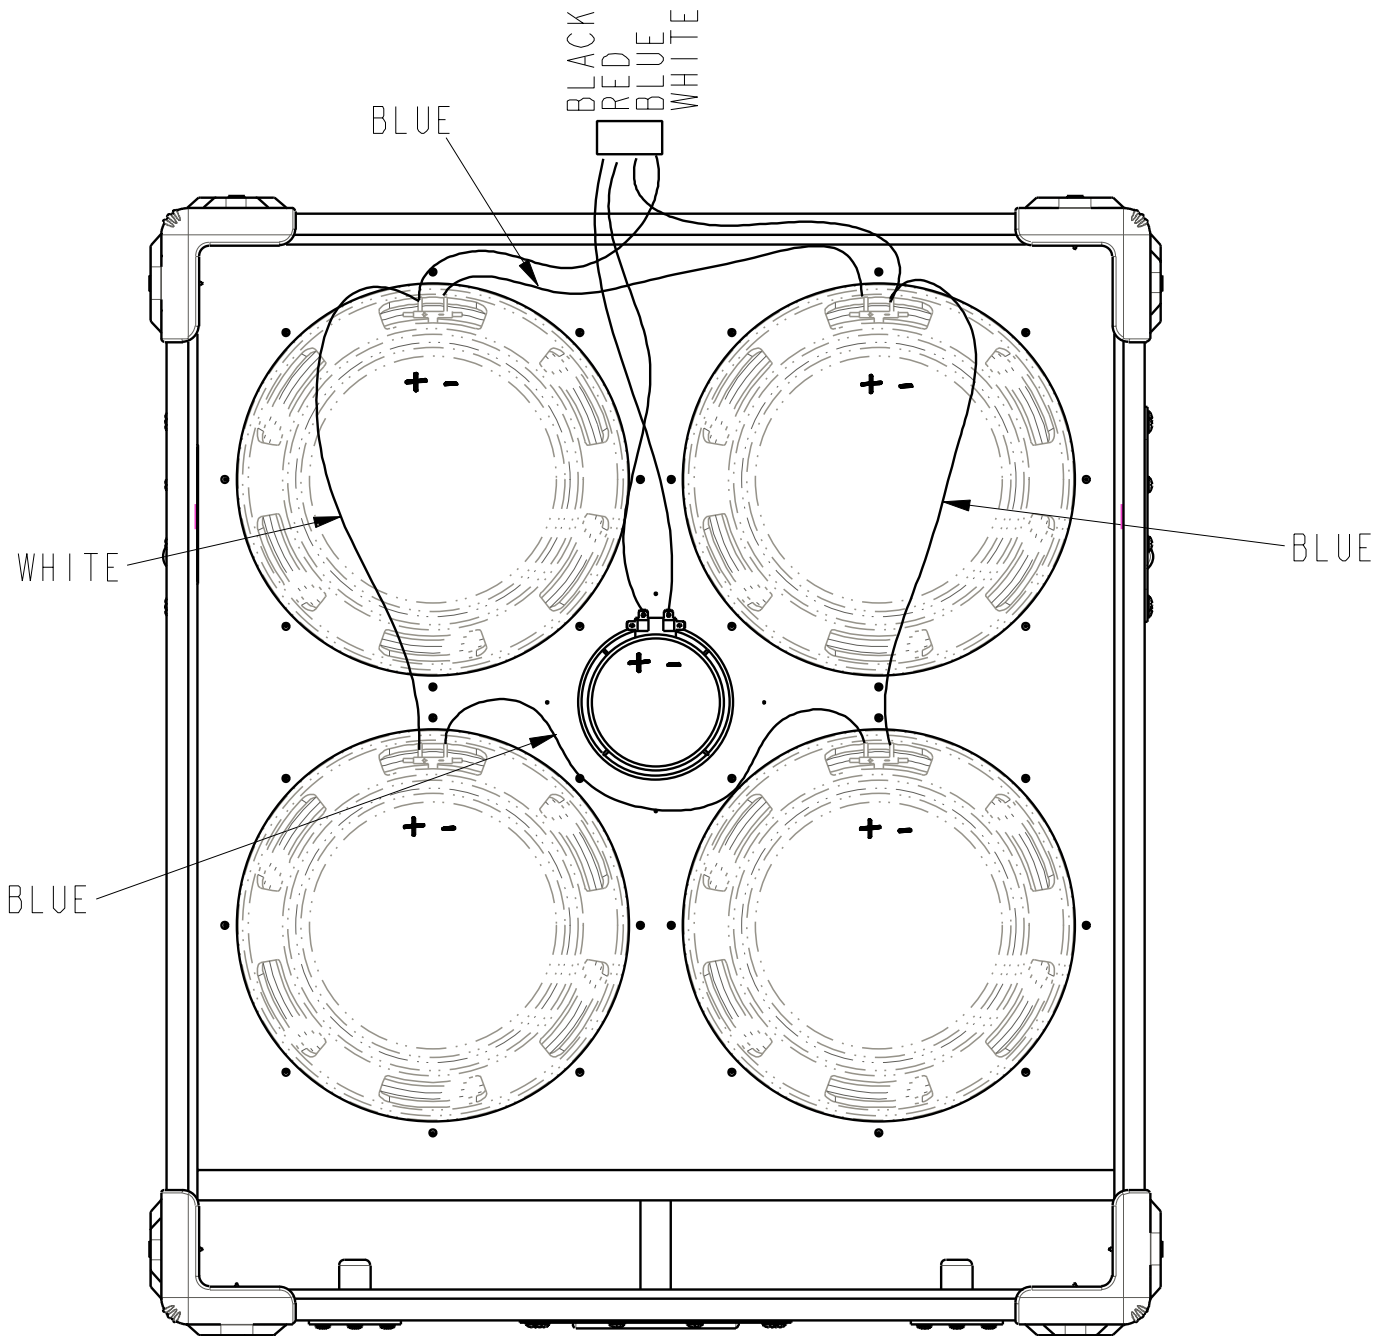


BXT41OHL4 SPEAKER HOOKUP

Series	BXT
Model	BXT210M
Type	2x10" enclosure w/tweeter
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-507-08
Woofer/coax Part Number	86-507-28
Woofer Power Handling	200 Watts
Tweeter Part Number	86-506-08

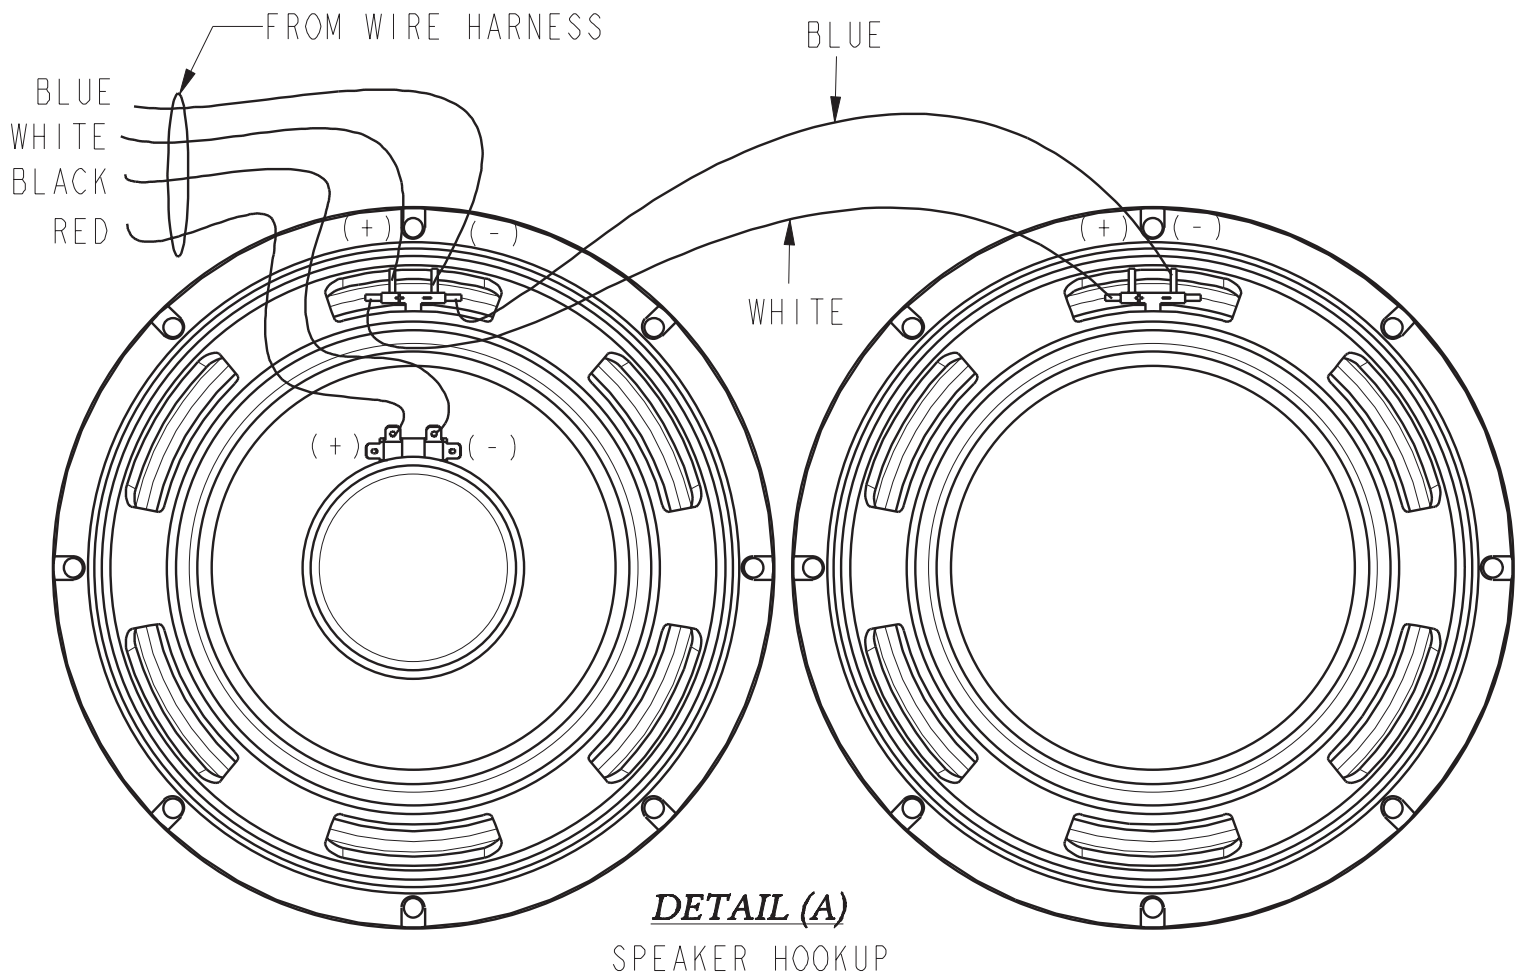


Series	BXT
Model	BXT115HL8
Type	1x15" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	86-524-08
Woofer Power Handling	400 Watts
Tweeter Part Number	86-515-08

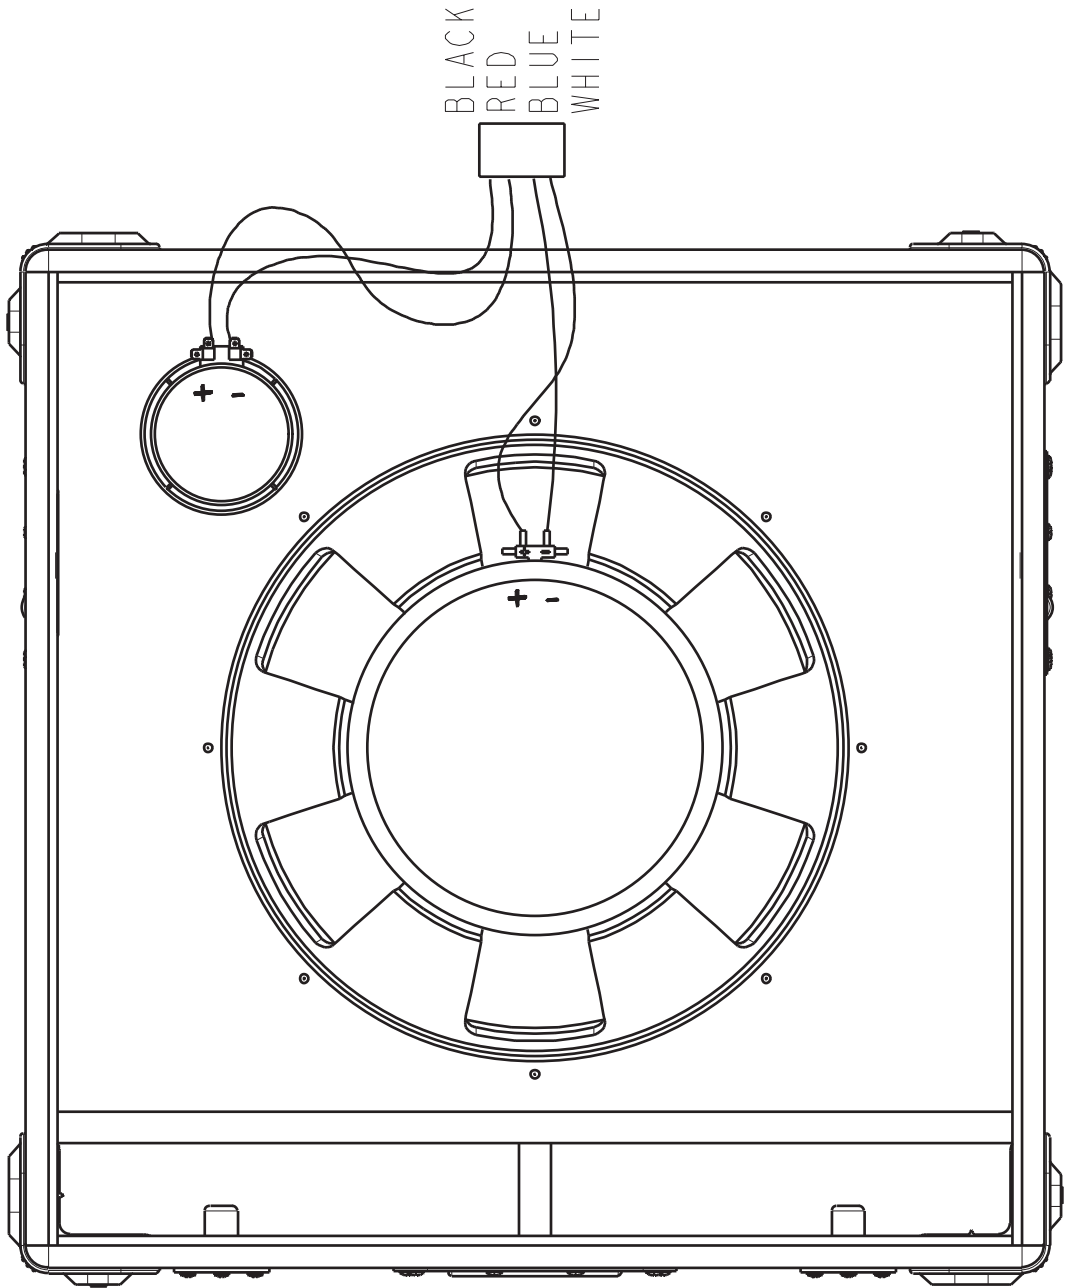


SPEAKER HOOKUP

Series	BXT
Model	BXT115HL4
Type	1x15" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Woofer Part Number	86-524-04
Woofer Power Handling	300 Watts
Tweeter Part Number	86-515-08

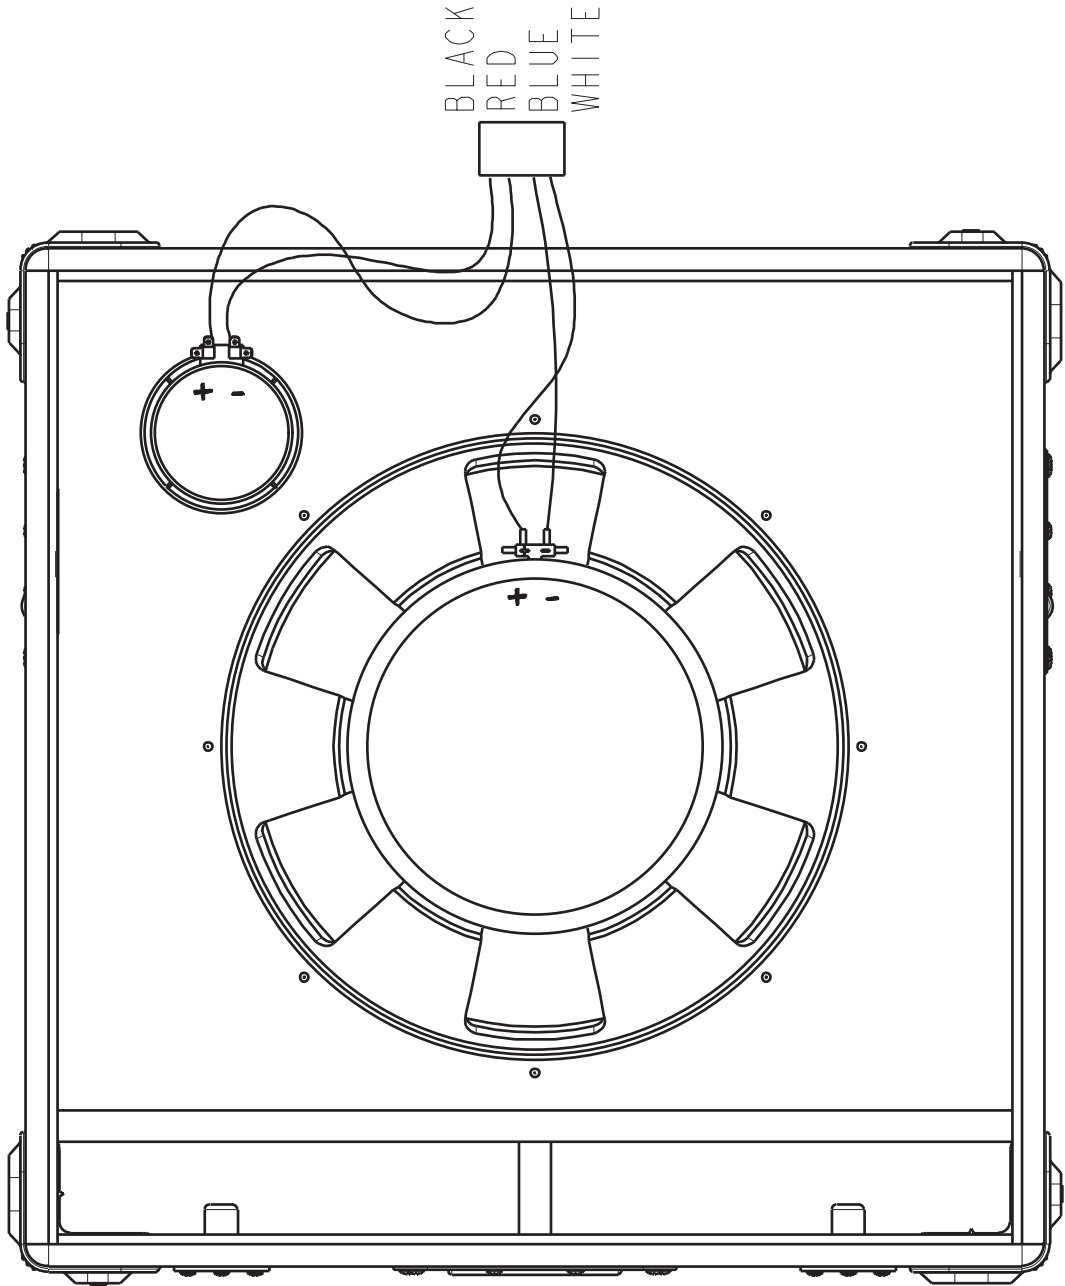


SPEAKER HOOKUP

Series	Portabass
Model	PB212H
Type	2x12" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-059-08
Woofer Power Handling	150 Watts
Tweeter Part Number	86-023-08

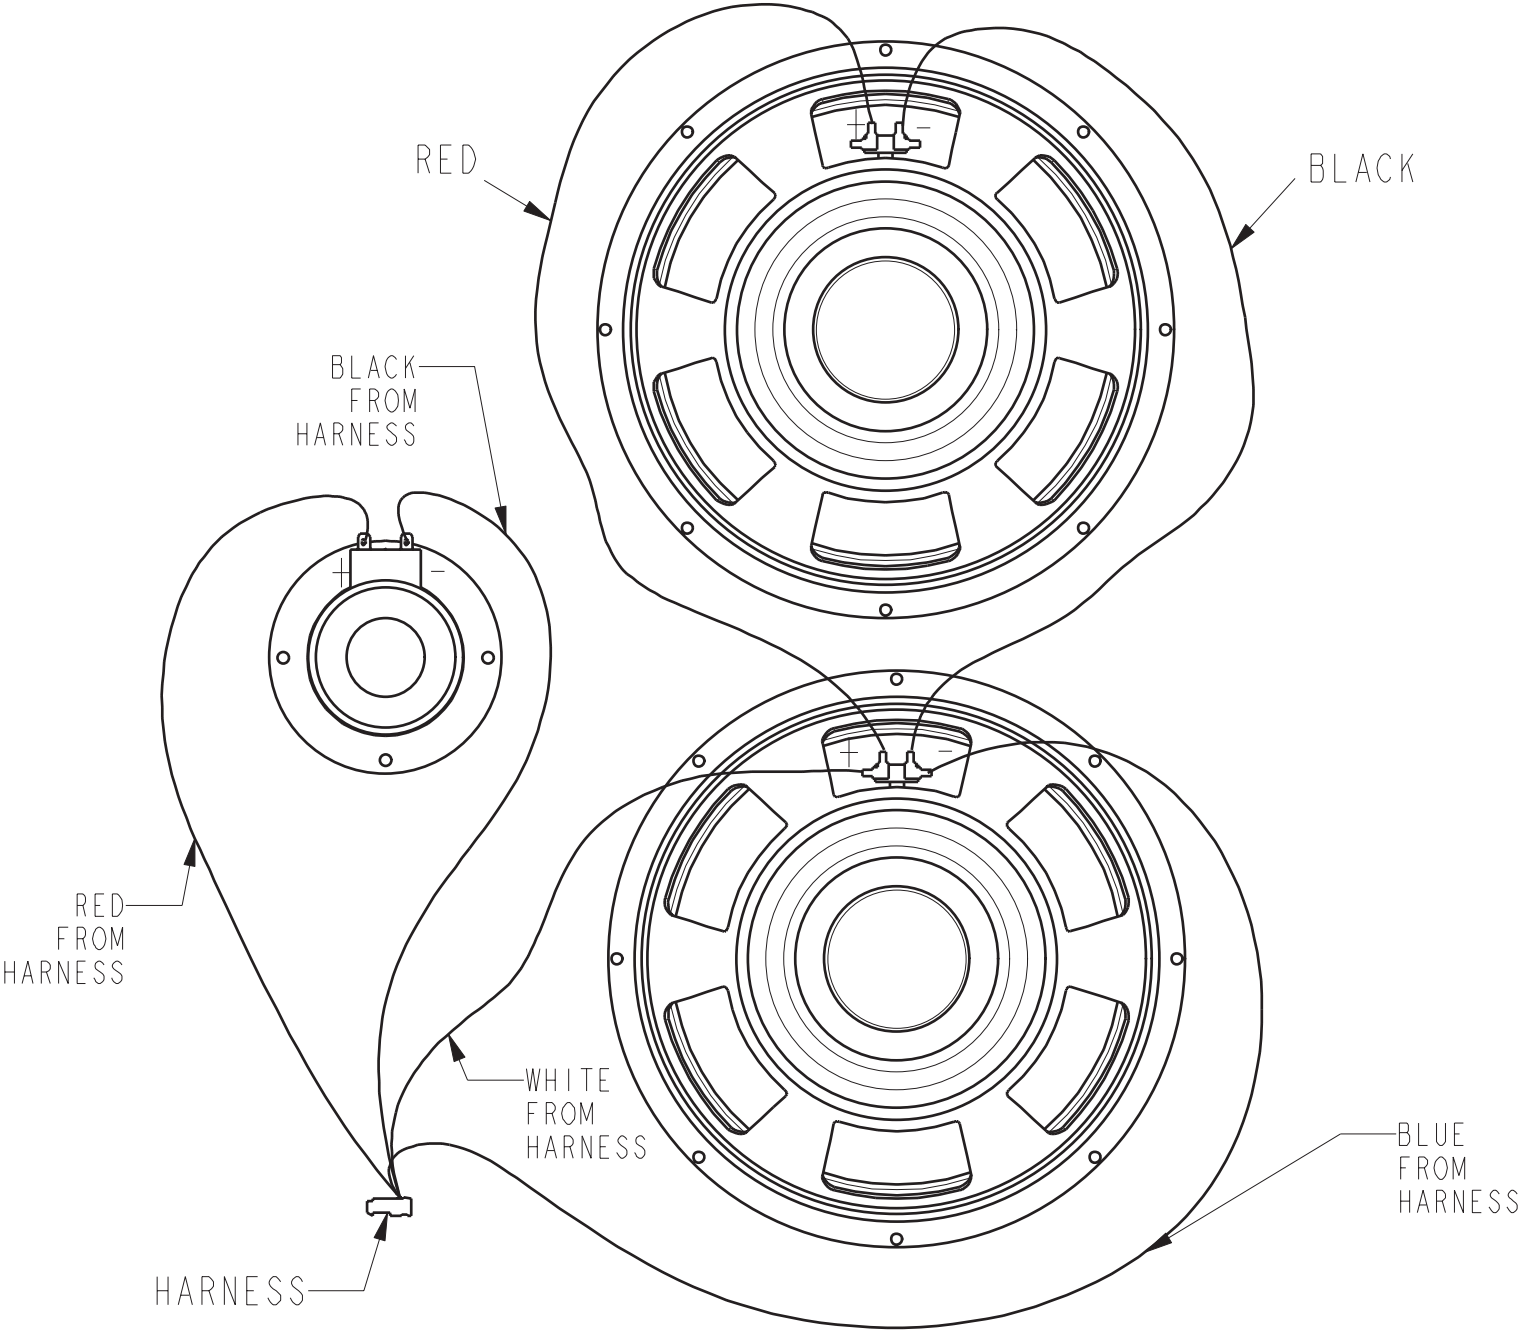

DETAIL (C)
SPEAKER ORIENTATION/HOOKUP


Series	Portabass
Model	PB210H
Type	2x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-227-08
Woofer Power Handling	150 Watts
Tweeter Part Number	86-023-08

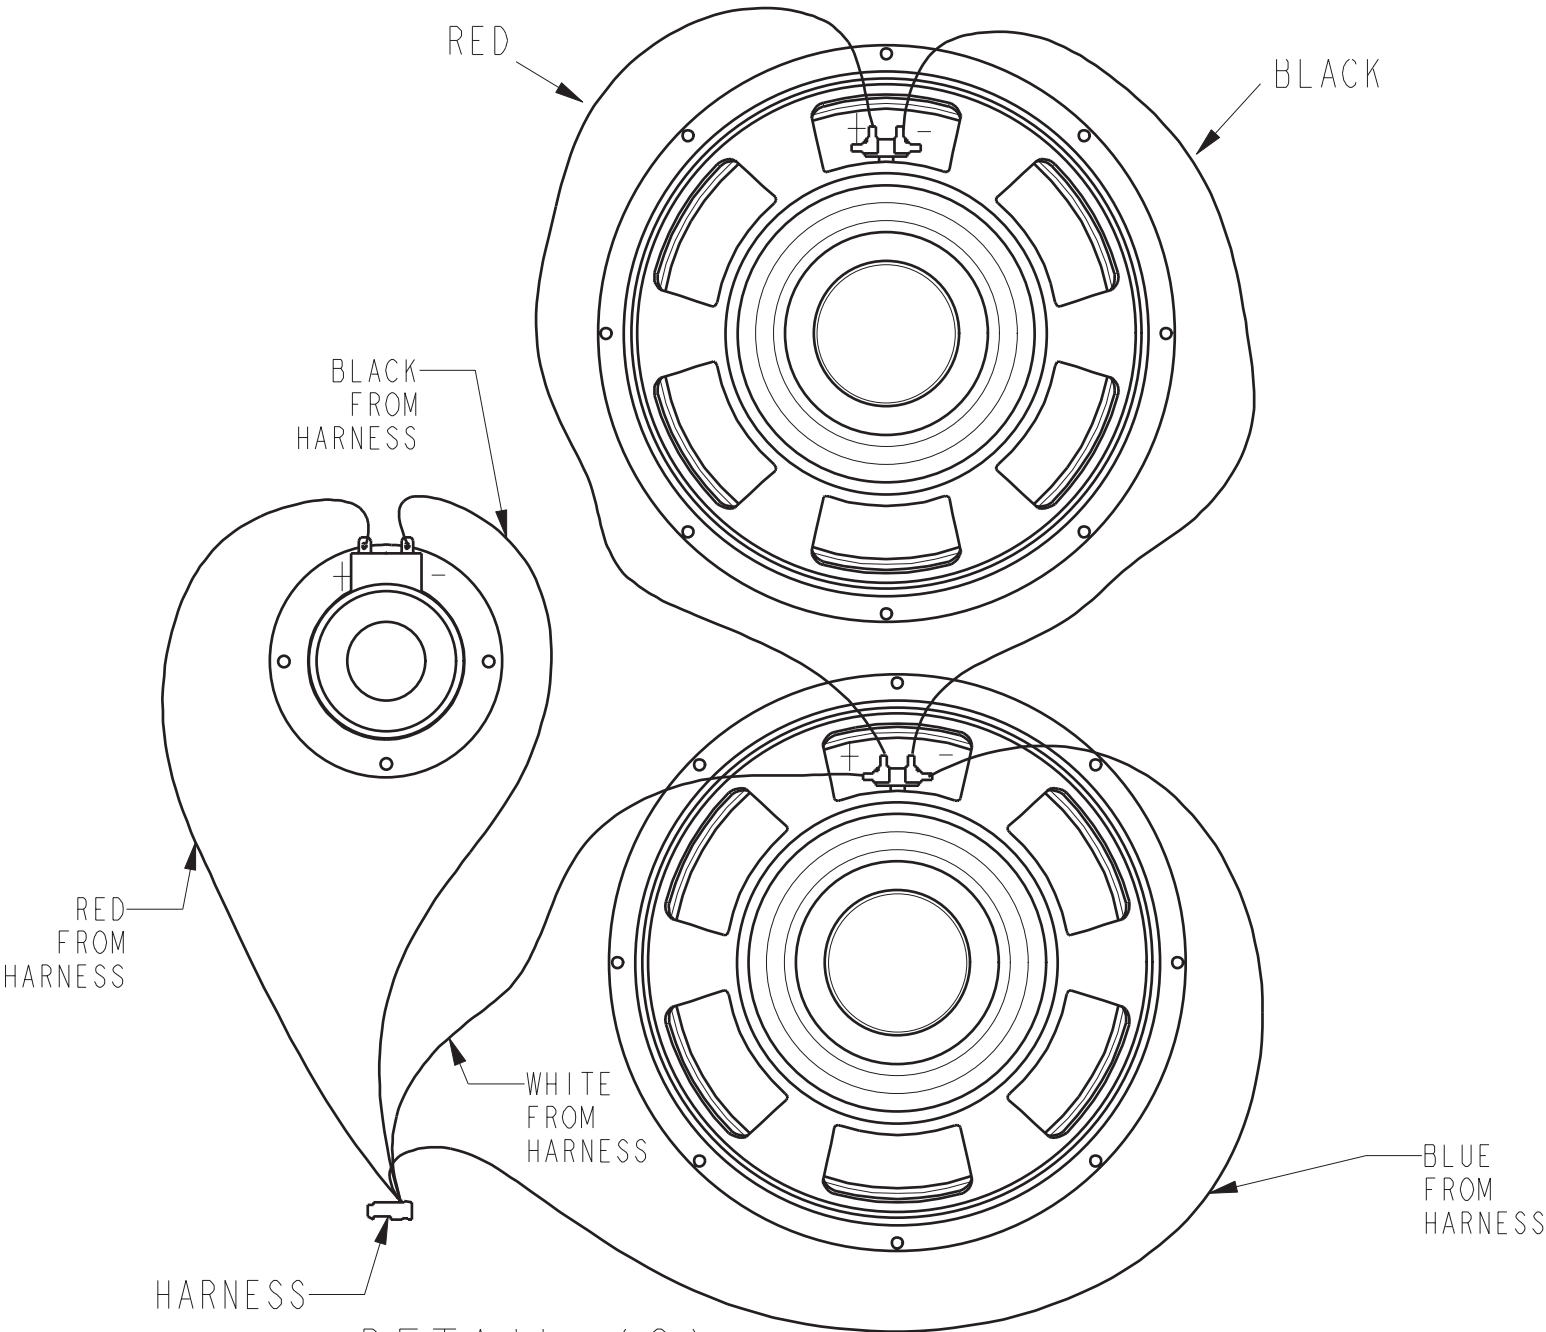

DETAIL (C)


SPEAKER ORIENTATION/HOOKUP

Series	Portabass
Model	PB112H
Type	1x12" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Woofer Part Number	86-027-04
Woofer Power Handling	200 Watts
Tweeter Part Number	86-023-08

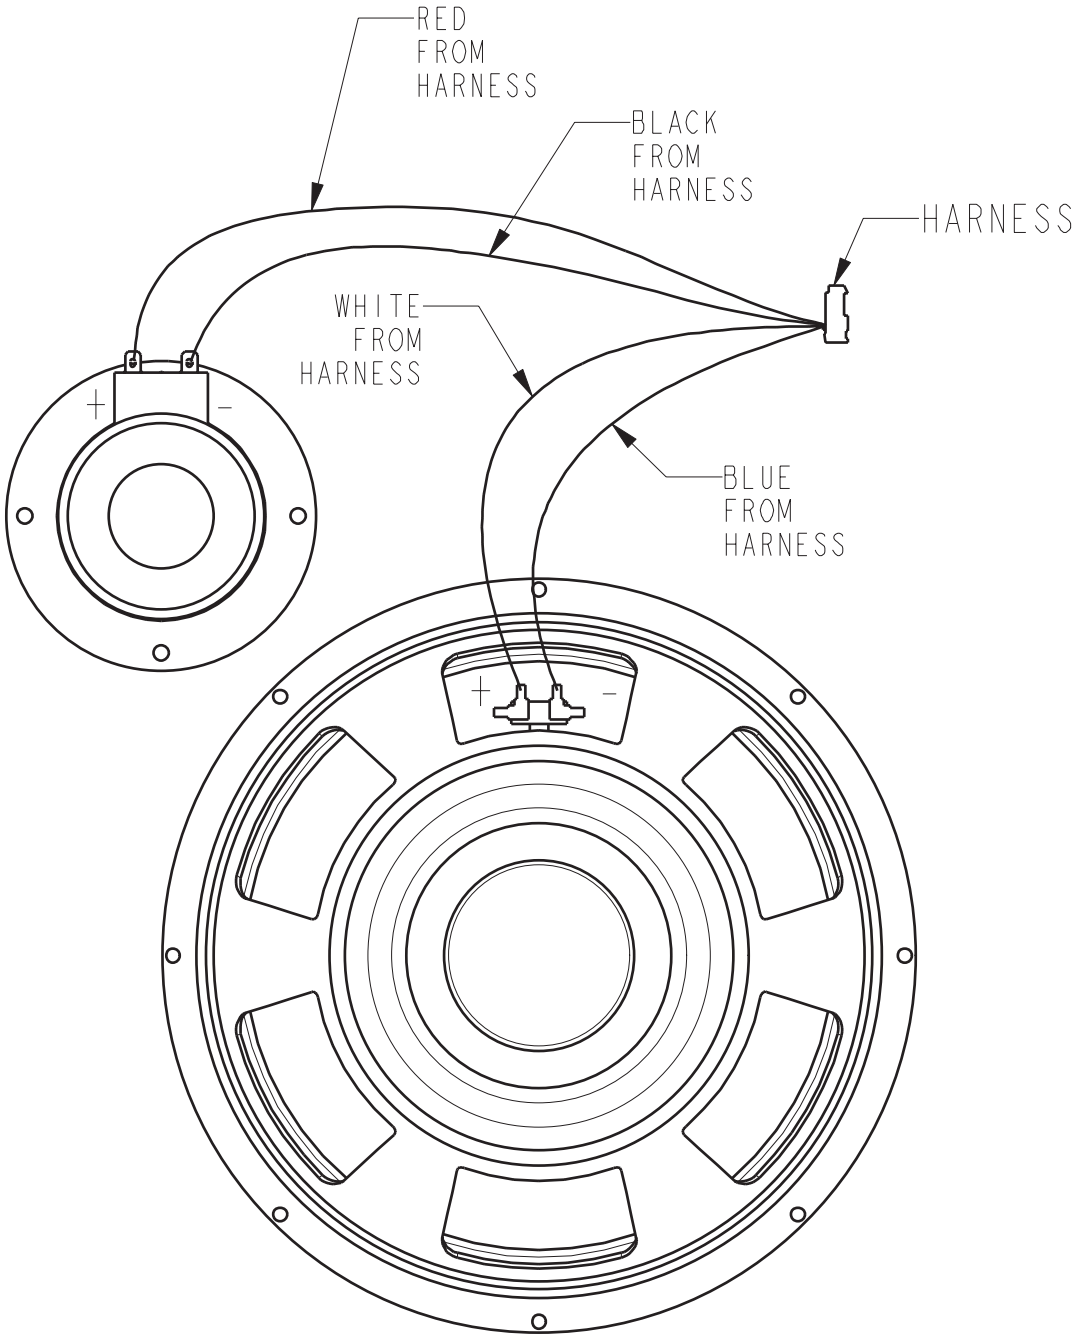


DETAIL (C)
SPEAKER ORIENTATION/HOOKUP

Series	Portabass
Model	PB110H
Type	1x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Woofer Part Number	86-024-04
Woofer Power Handling	200 Watts
Tweeter Part Number	86-023-08

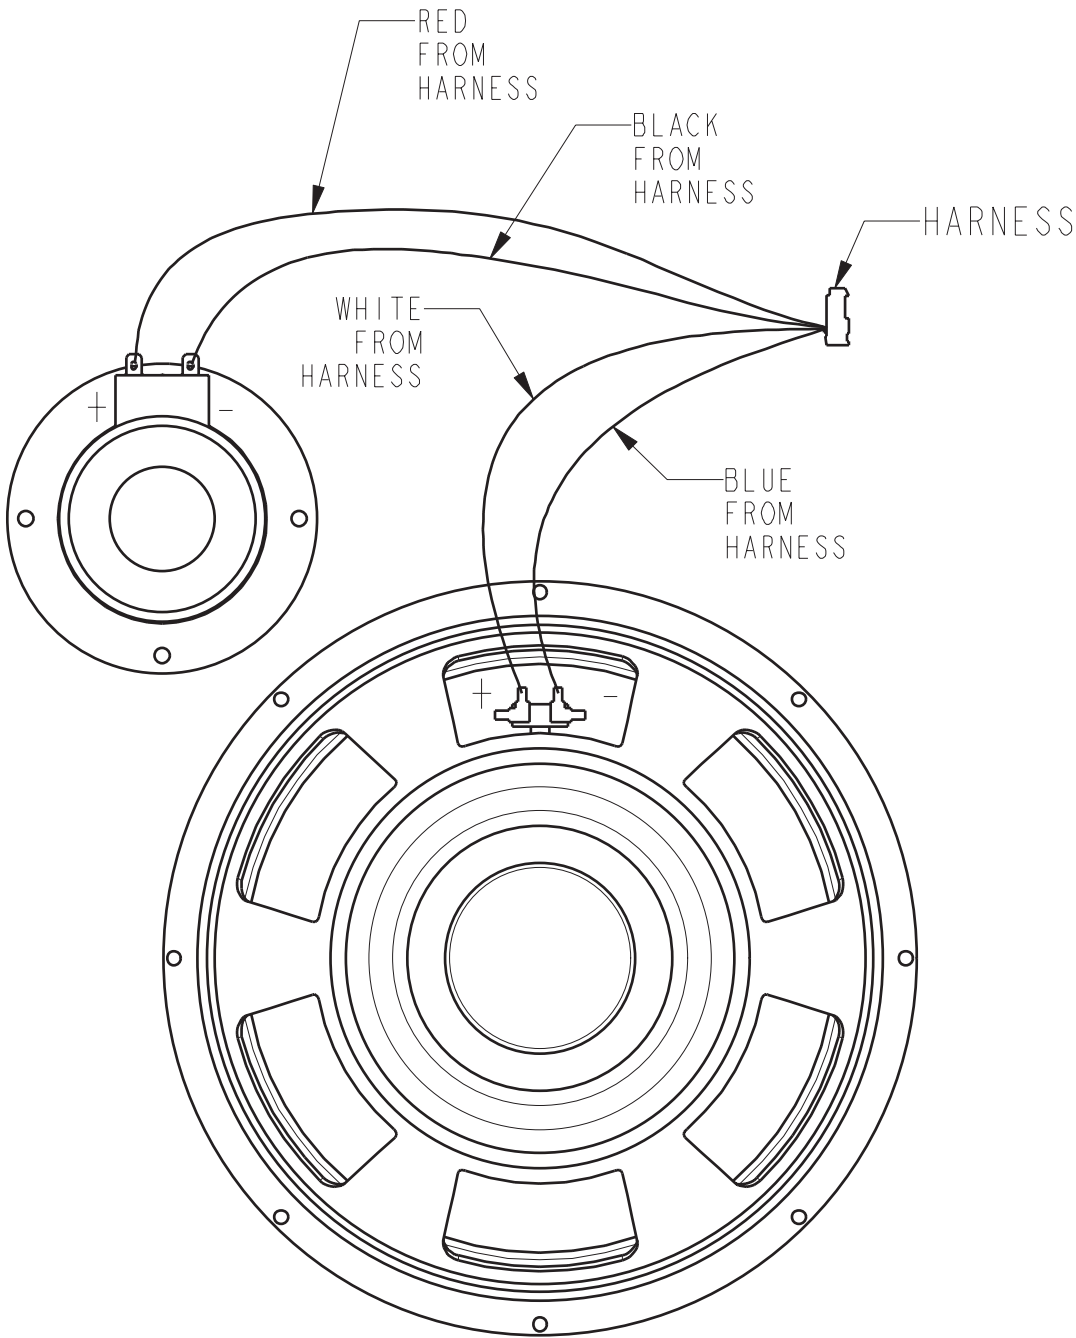


DETAIL (C)
SPEAKER ORIENTATION/HOOKUP


Series	Pro
Model	PR-1832HE
Type	2x6", 2x10", 1x18" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	6"- 8 Ohms 10"- 8 Ohms 18"- 4 Ohms
Wiring	Series/Parallel
Woofer Part Number	6"- 86-060-08 10"- 86-530-08 18"- 86-179-04
Woofer Power Handling	6"- 50 Watts 10"- 150 Watts 18"- 400 Watts
Tweeter Part Number	86-515-08

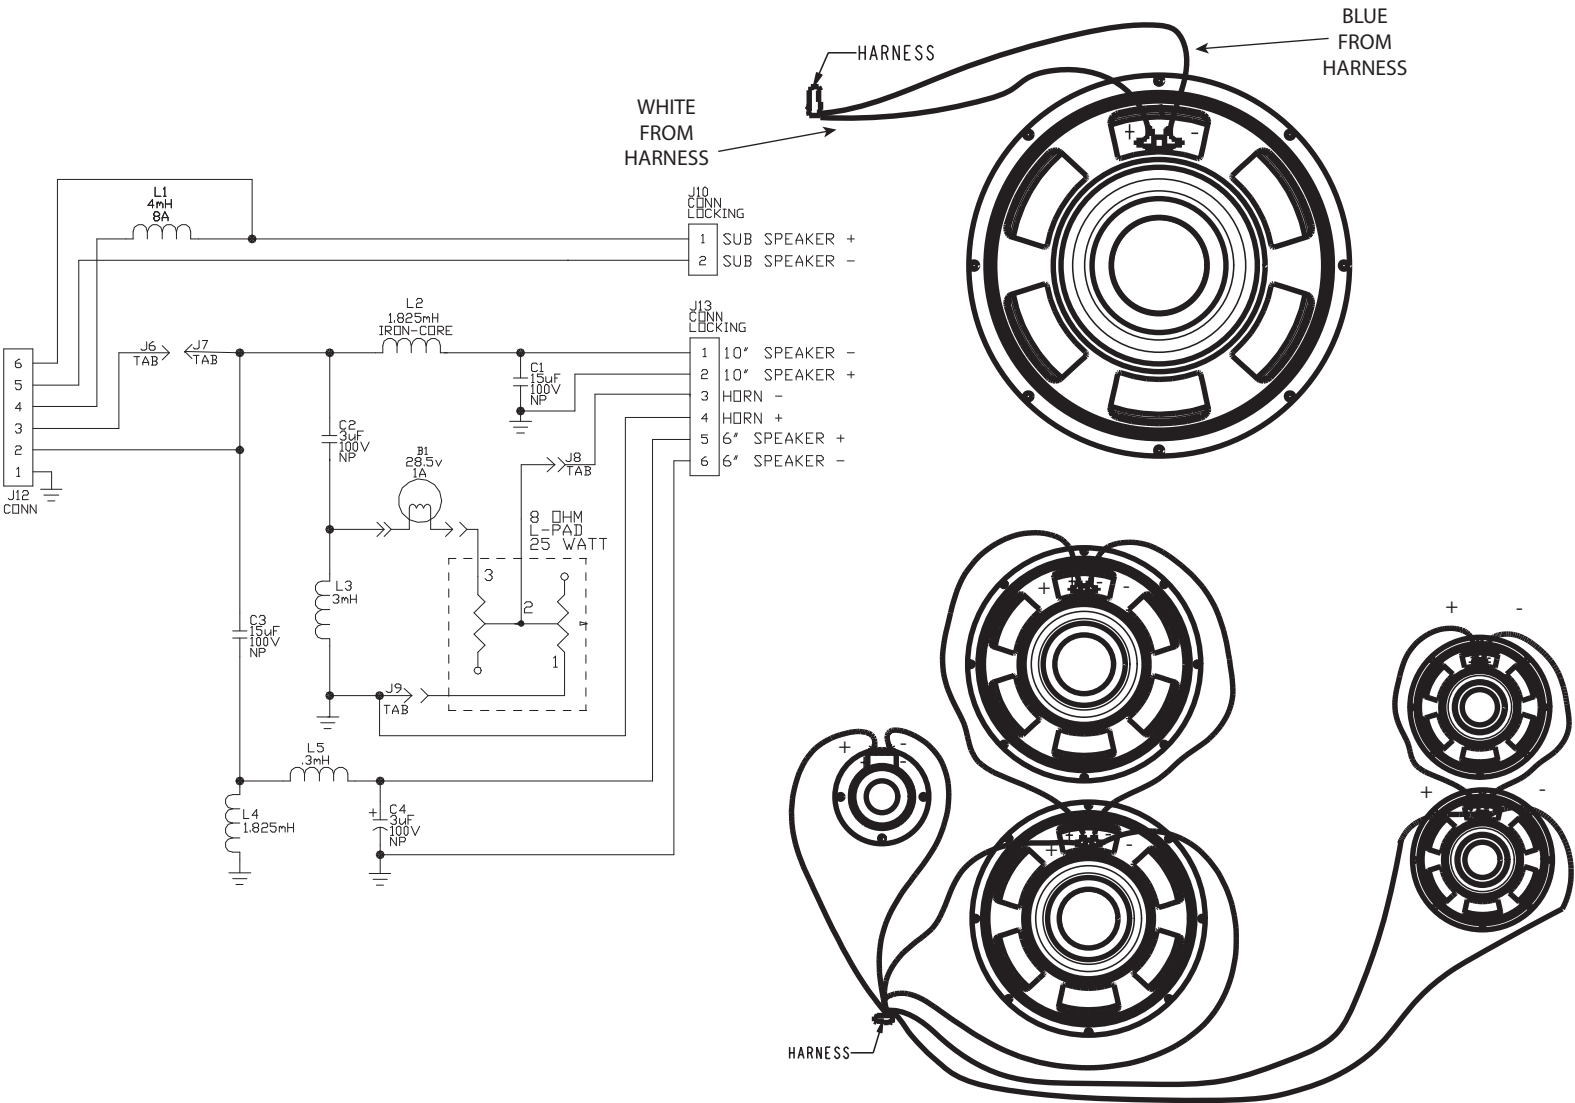


Series	Pro
Model	PR-1528HE
Type	2x8", 1x15" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8"- 8 Ohms 15"- 4 Ohms
Wiring	Series/Parallel
Woofer Part Number	8"- 86-060-08 15"- 86-530-08
Woofer Power Handling	8"- 75 Watts 15"- 300 Watts
Tweeter Part Number	86-515-08

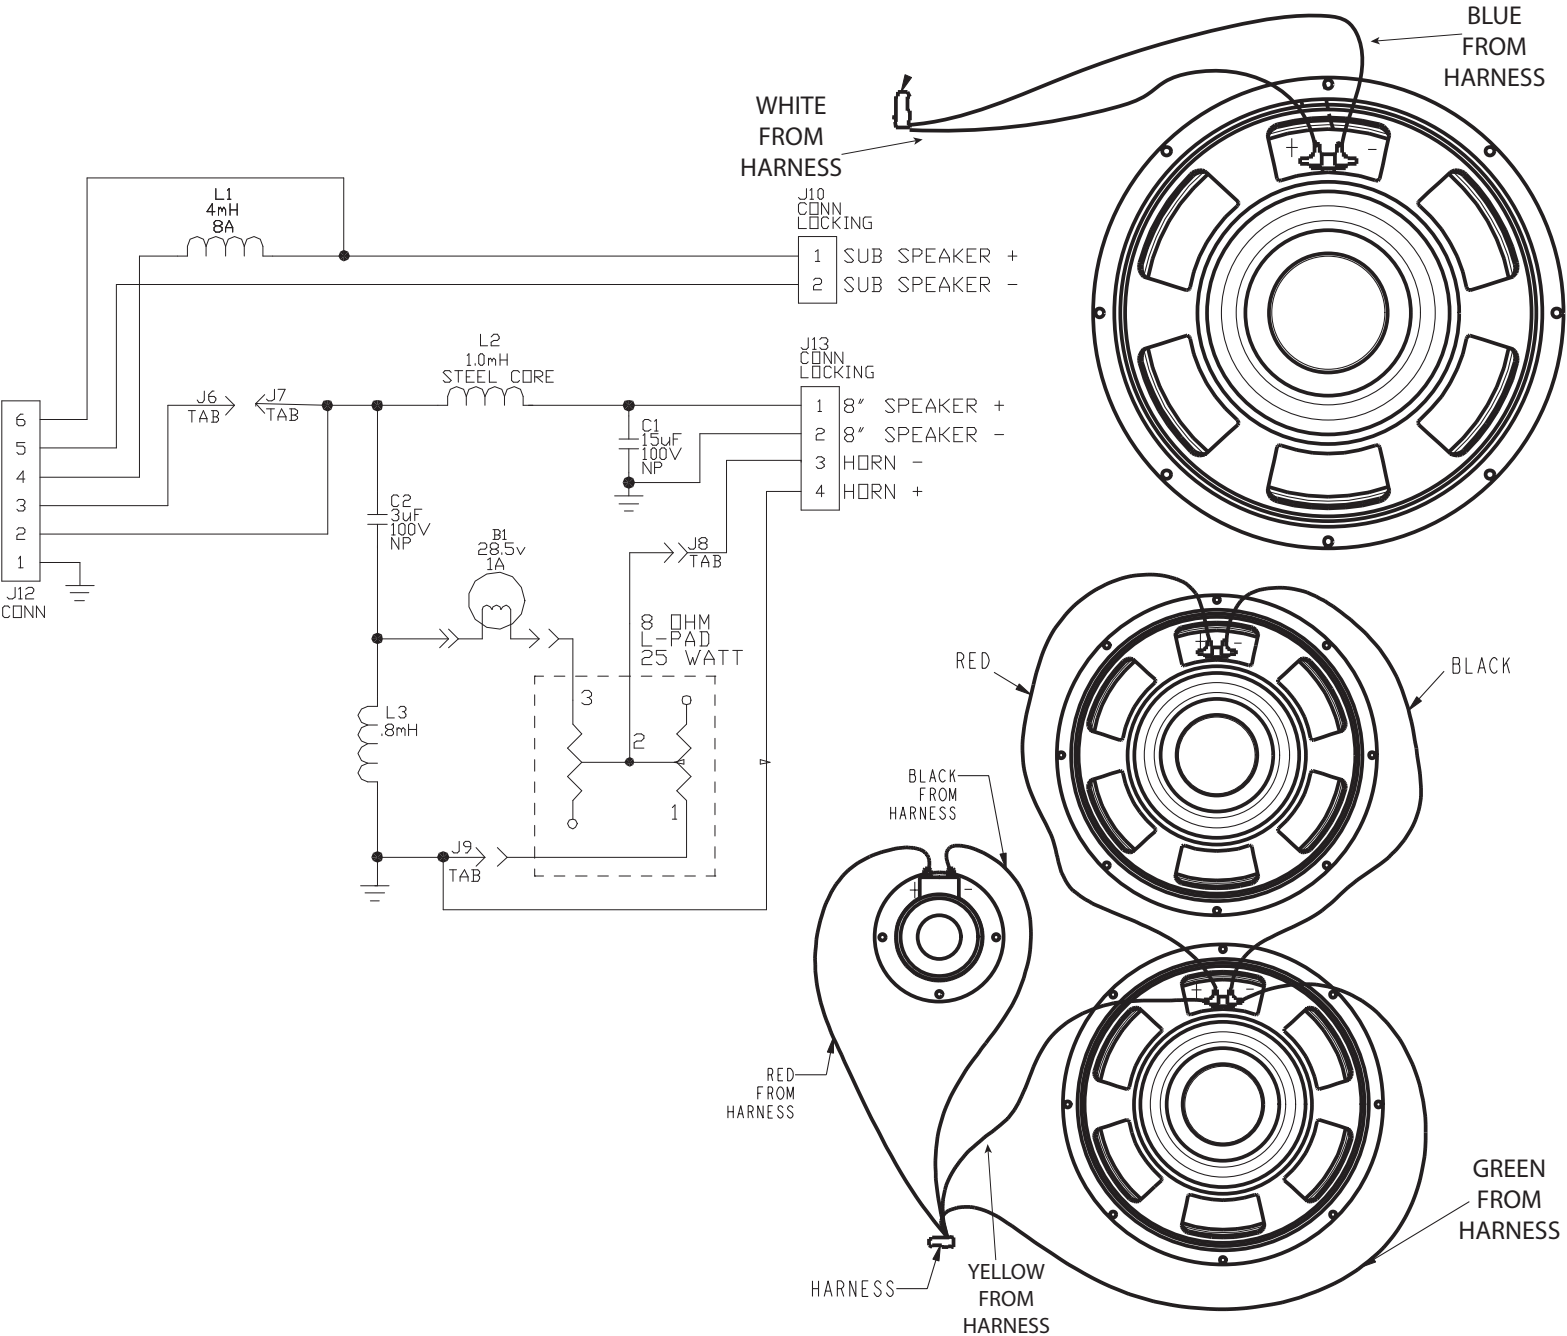


Series	Pro
Model	PR-810Ha
Type	8x10"enclosure w/ dual horns
Cabinet Impedance	4 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-531-32
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

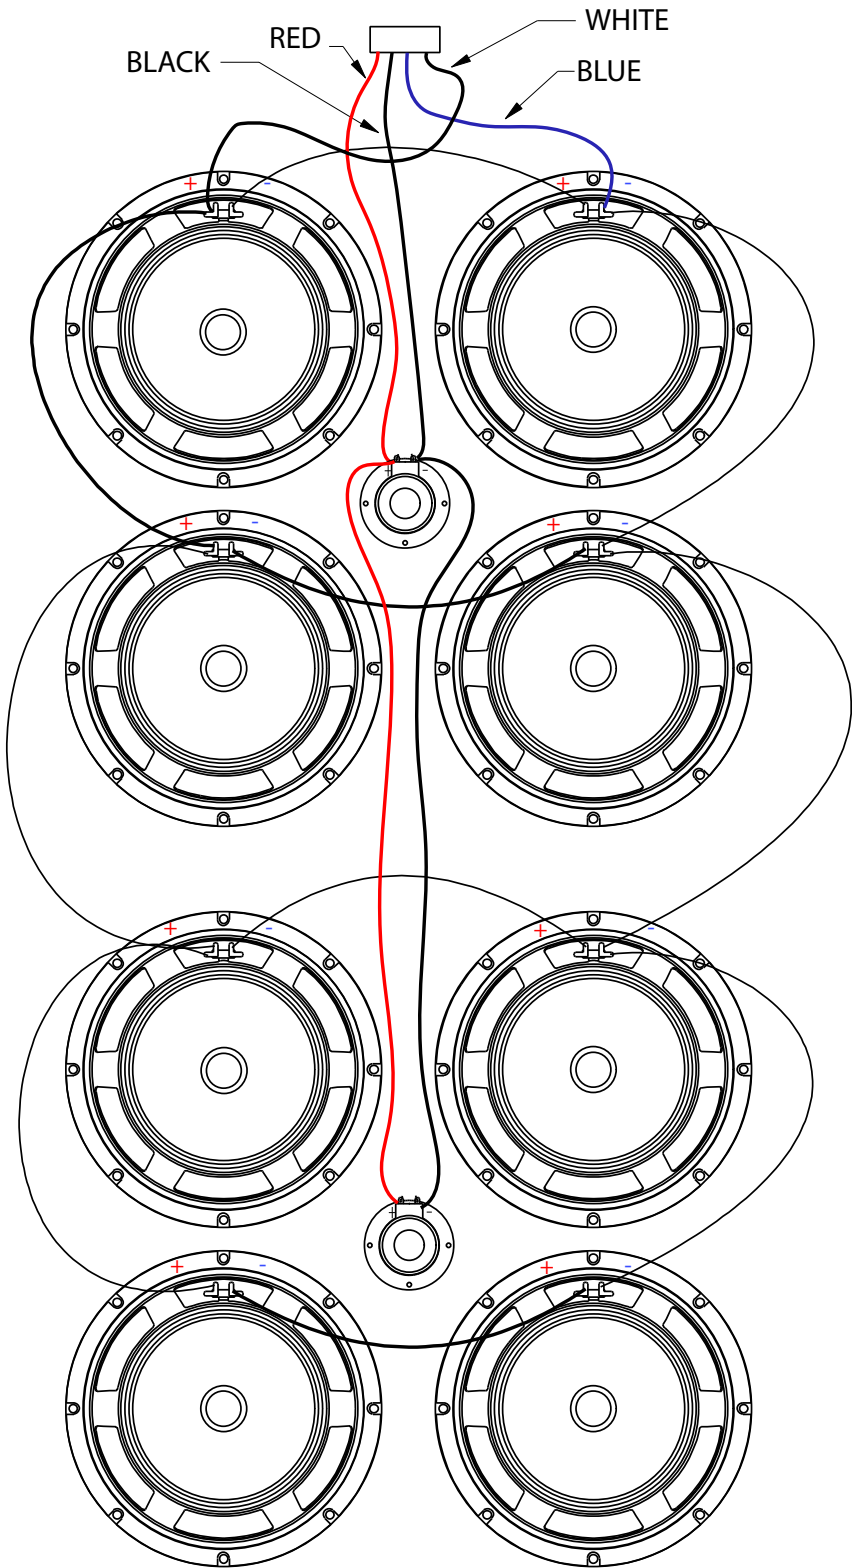


Series	Pro
Model	PR-810Hb,c
Type	8x10"enclosure w/ dual horns
Cabinet Impedance	4 Ohms/8 Ohms Split
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-531-32
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

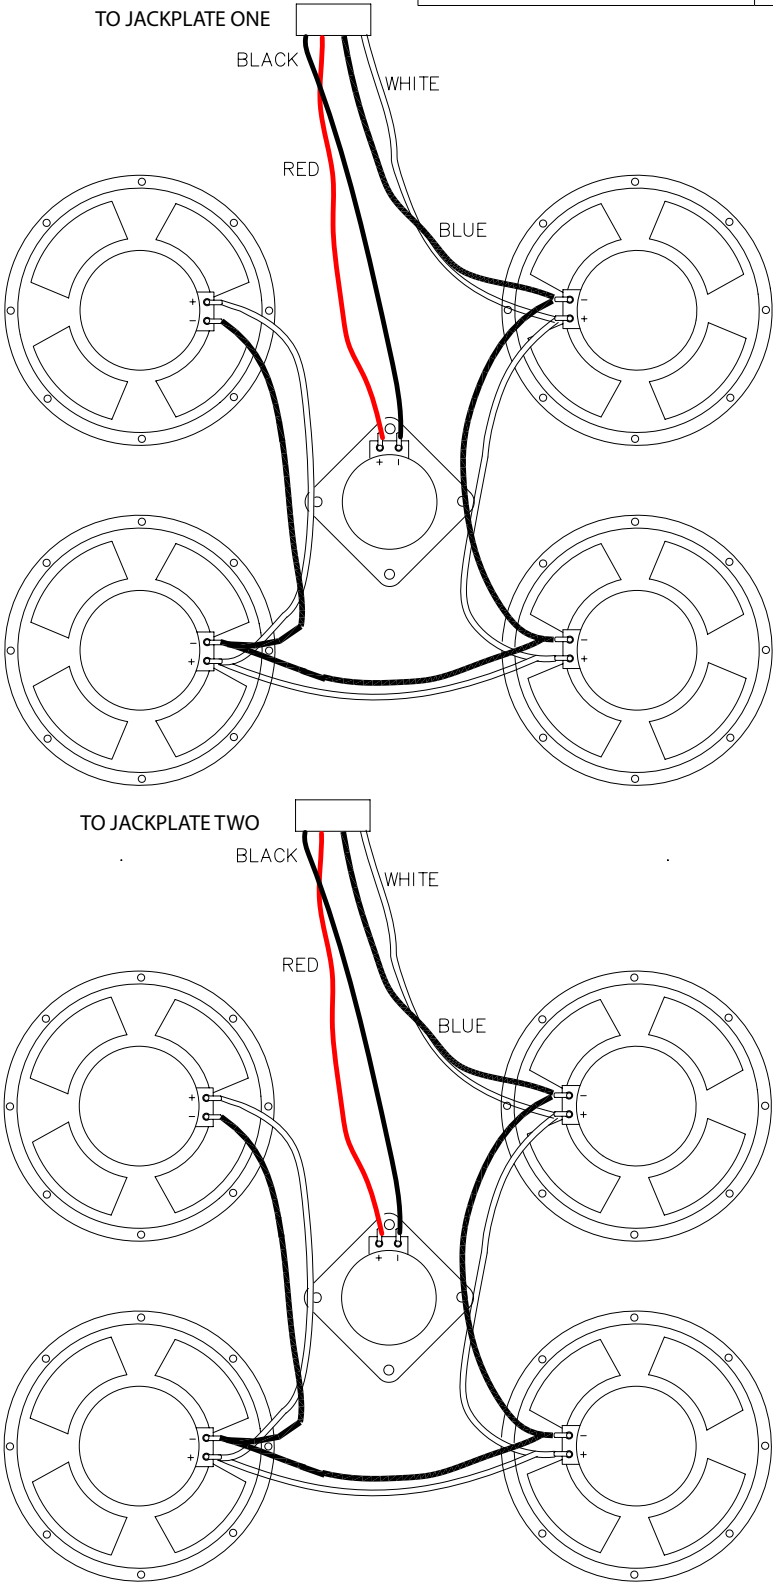


Series	Pro
Model	PR-410HLF
Type	4x10" enclosure w/ horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-531-04
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

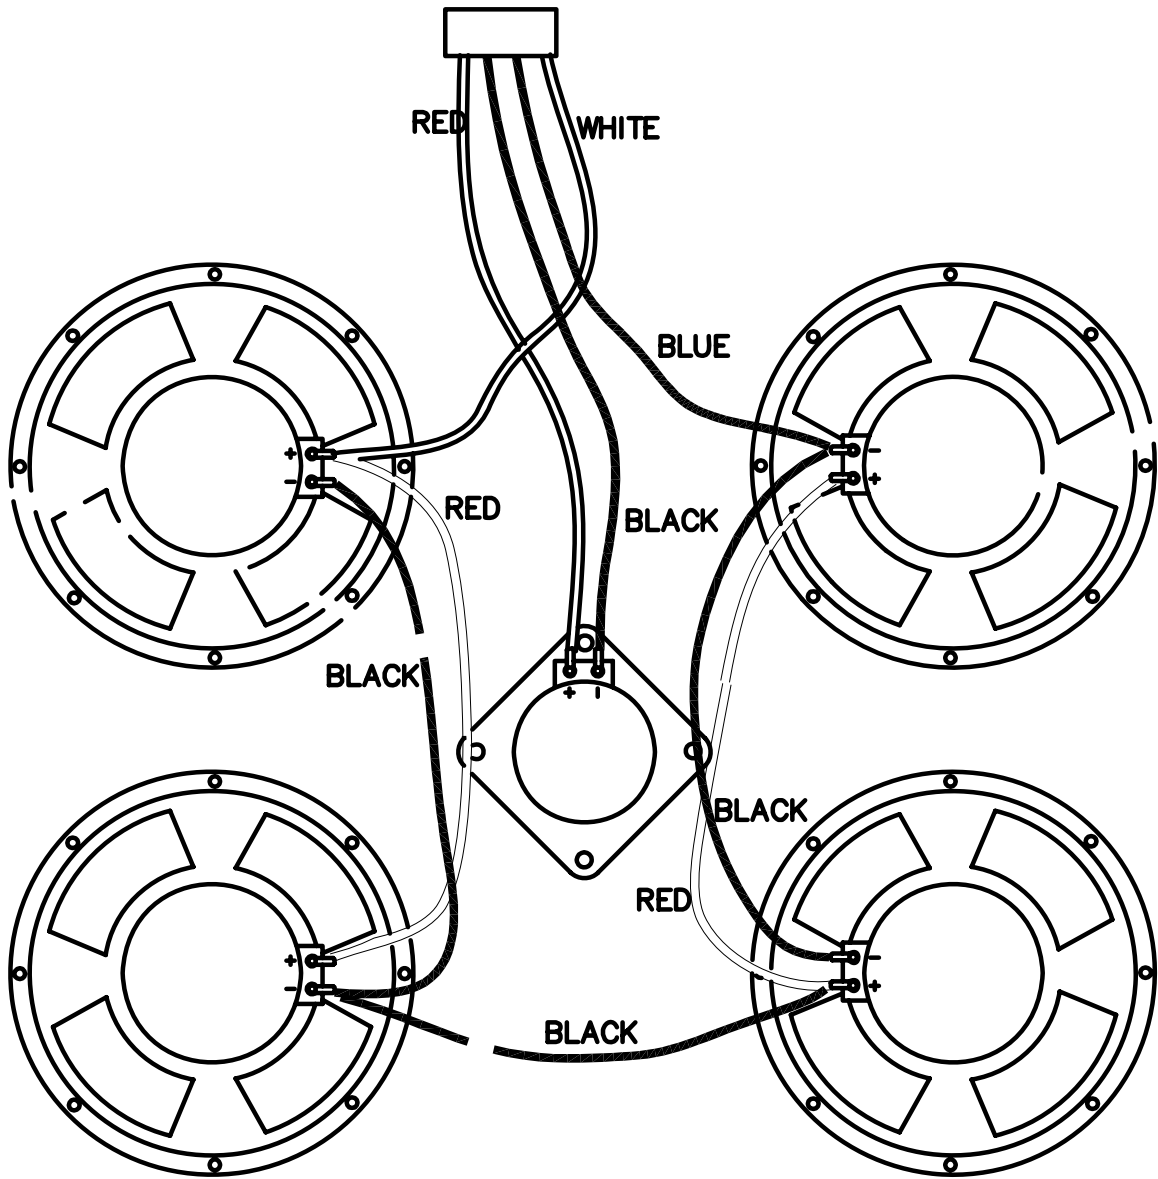

Series	Pro
Model	PR-410H
Type	4x10"enclosure w/ horn
Cabinet Impedance	8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-531-32
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

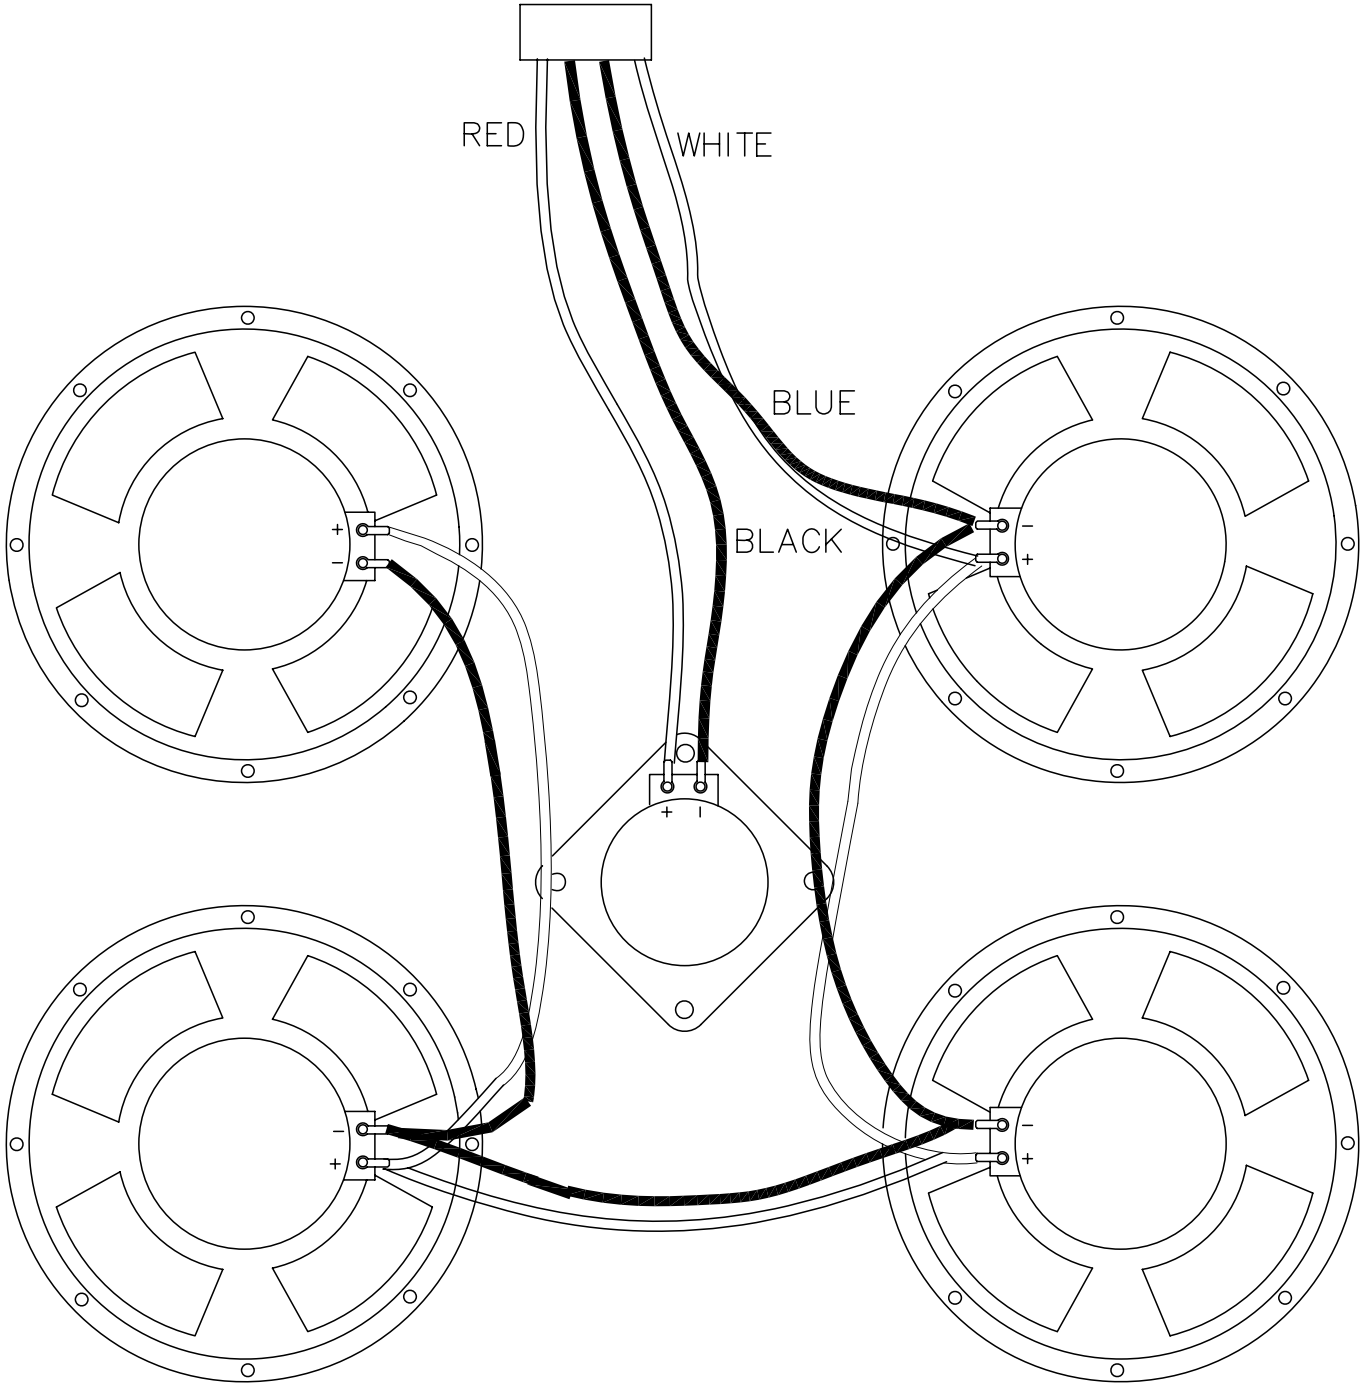


Series	Pro
Model	PR-212H
Type	2x12" enclosure w/ horn
Cabinet Impedance	8 Ohms
Speaker Impedance	16 Ohms
Wiring	Parallel
Woofer Part Number	86-526-16
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

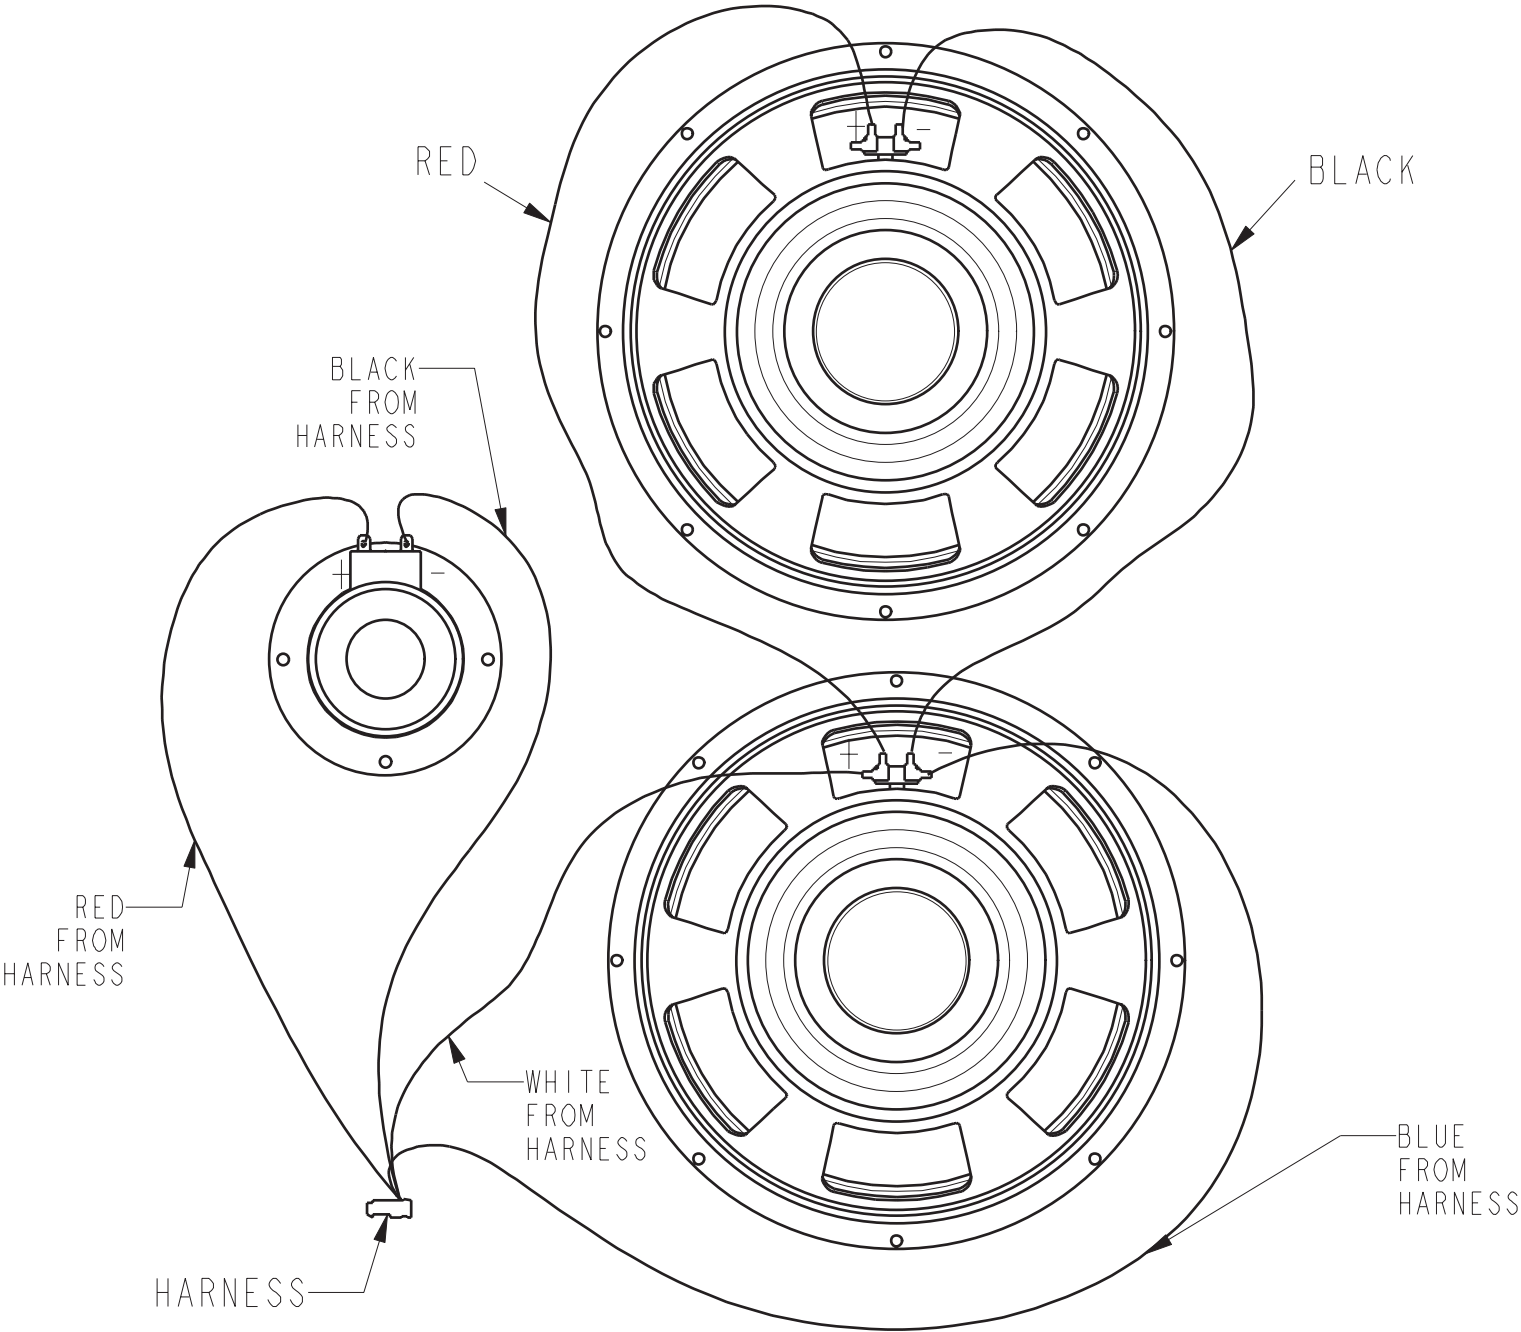

DETAIL (C)
SPEAKER ORIENTATION/HOOKUP


Series	Pro
Model	PR-210H
Type	2x10" enclosure w/ horn
Cabinet Impedance	8 Ohms
Speaker Impedance	4 Ohms
Wiring	Series
Woofer Part Number	86-531-04
Woofer Power Handling	150 Watts
Tweeter Part Number	86-515-08

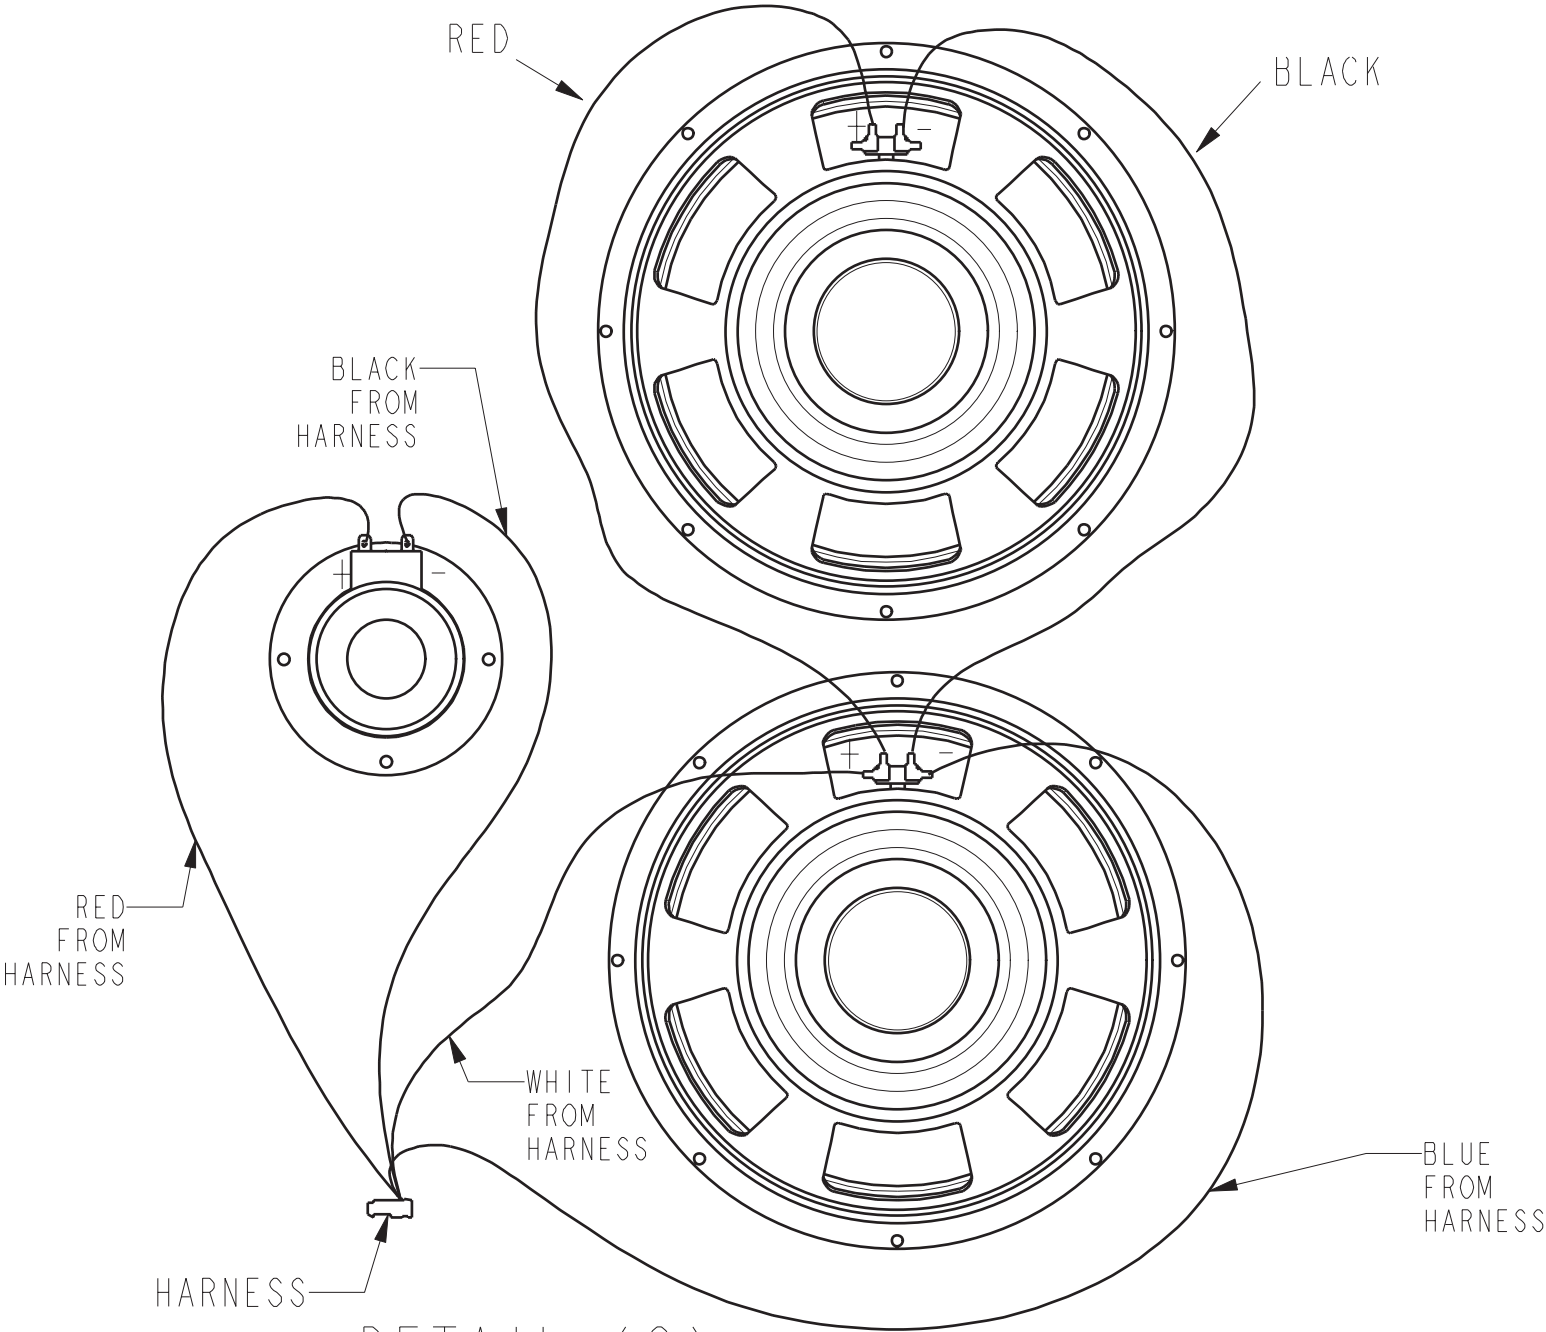

DETAIL (C)

SPEAKER ORIENTATION/HOOKUP


Series	Pro
Model	PR-15H
Type	1x15"enclosure w/ horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Wiring	Series
Woofer Part Number	86-524-08
Woofer Power Handling	400 Watts
Tweeter Part Number	86-515-08

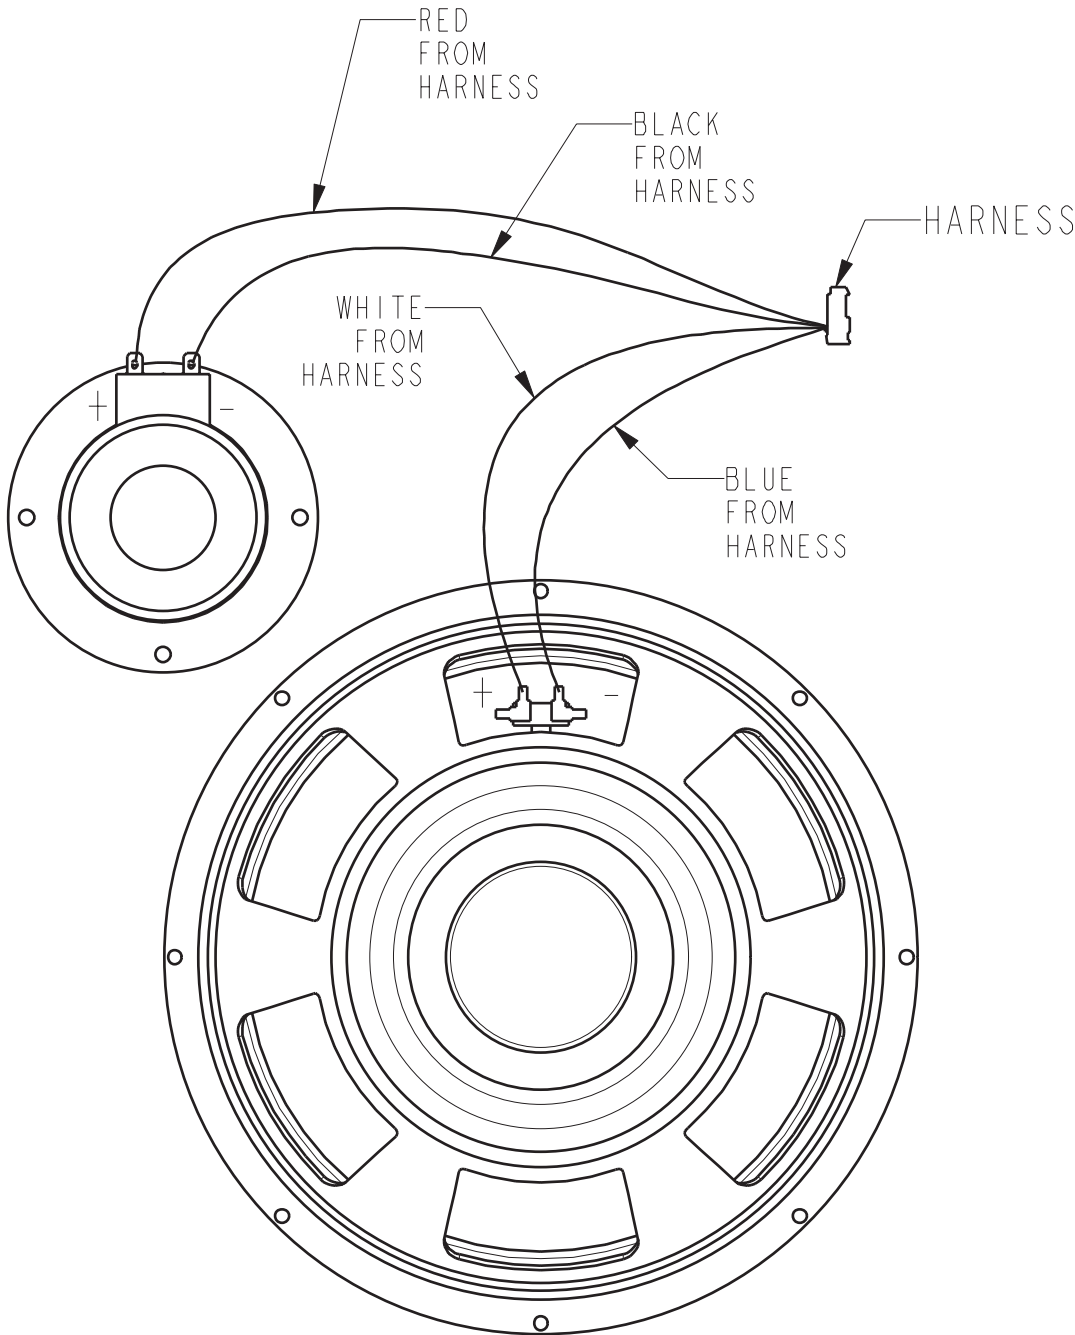

DETAIL (C)
SPEAKER ORIENTATION/HOOKUP


Series	Classic
Model	SVT-810HPC
Type	8x10" w/2x HF drivers enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-507-08
Coaxial Woofer Part Number	86-507-28
Woofer Power Handling	200 Watts
HF Screw-on Driver Part Number	86-506-08

SPEAKER PLACEMENT / HOOKUP
(VIEW FROM REAR)

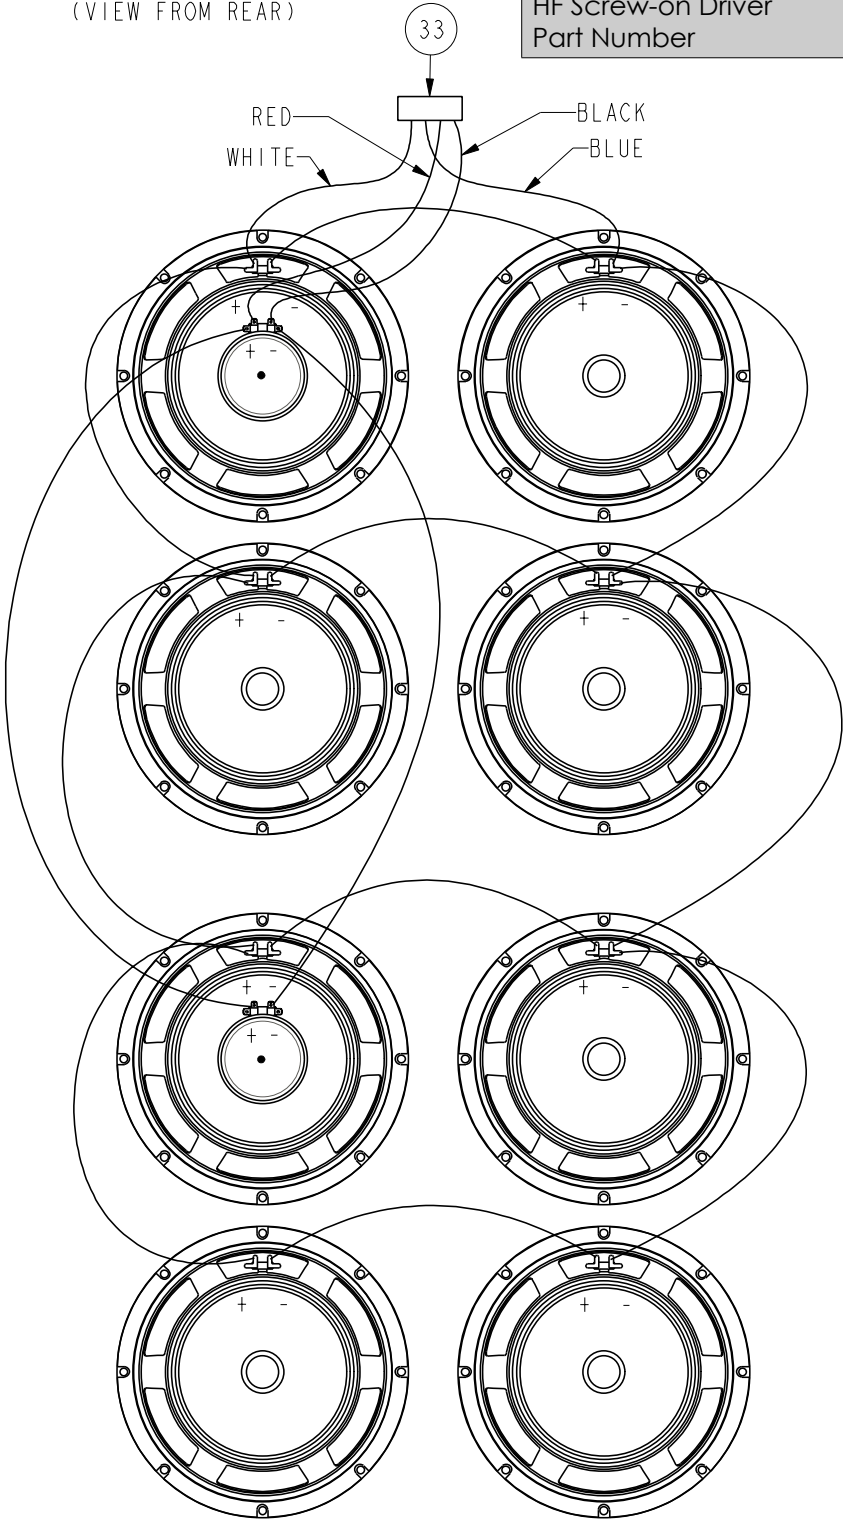


Series	Classic
Model	SVT-810HP
Type	8x10" w/2x HF drivers enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-358-08
Coaxial Woofer Part Number	86-358-28
Woofer Power Handling	200 Watts
HF Screw-on Driver Part Number	86-515-09


SPEAKER PLACEMENT / HOOKUP
(VIEW FROM REAR)

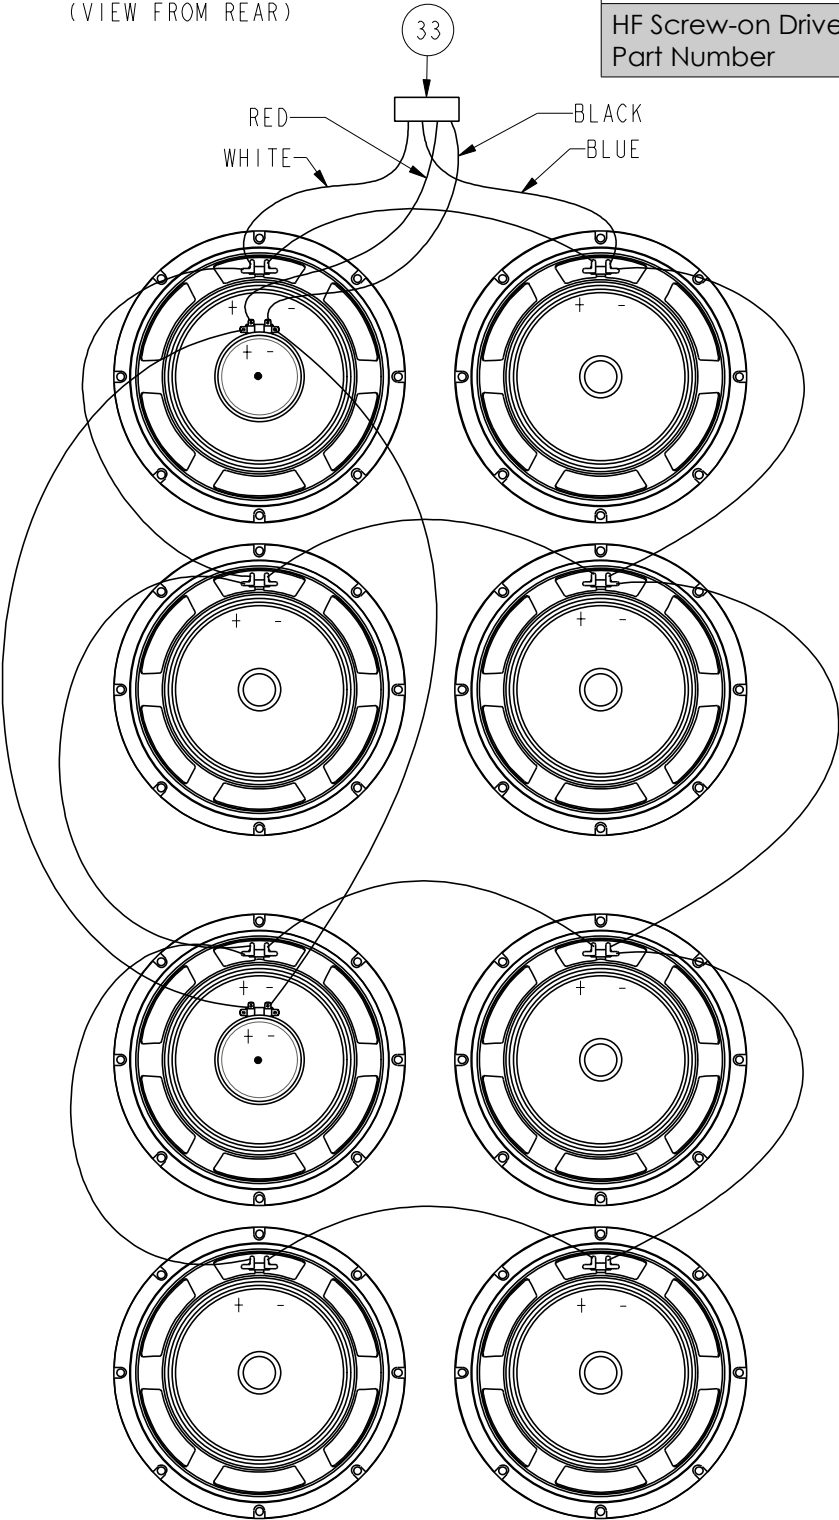


Series	Classic
Model	SVT-808HE
Type	8x8" enclosure w/ horn
Cabinet Impedance	4 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-480-32
Woofer Power Handling	75 Watts
Tweeter Part Number	86-007-01

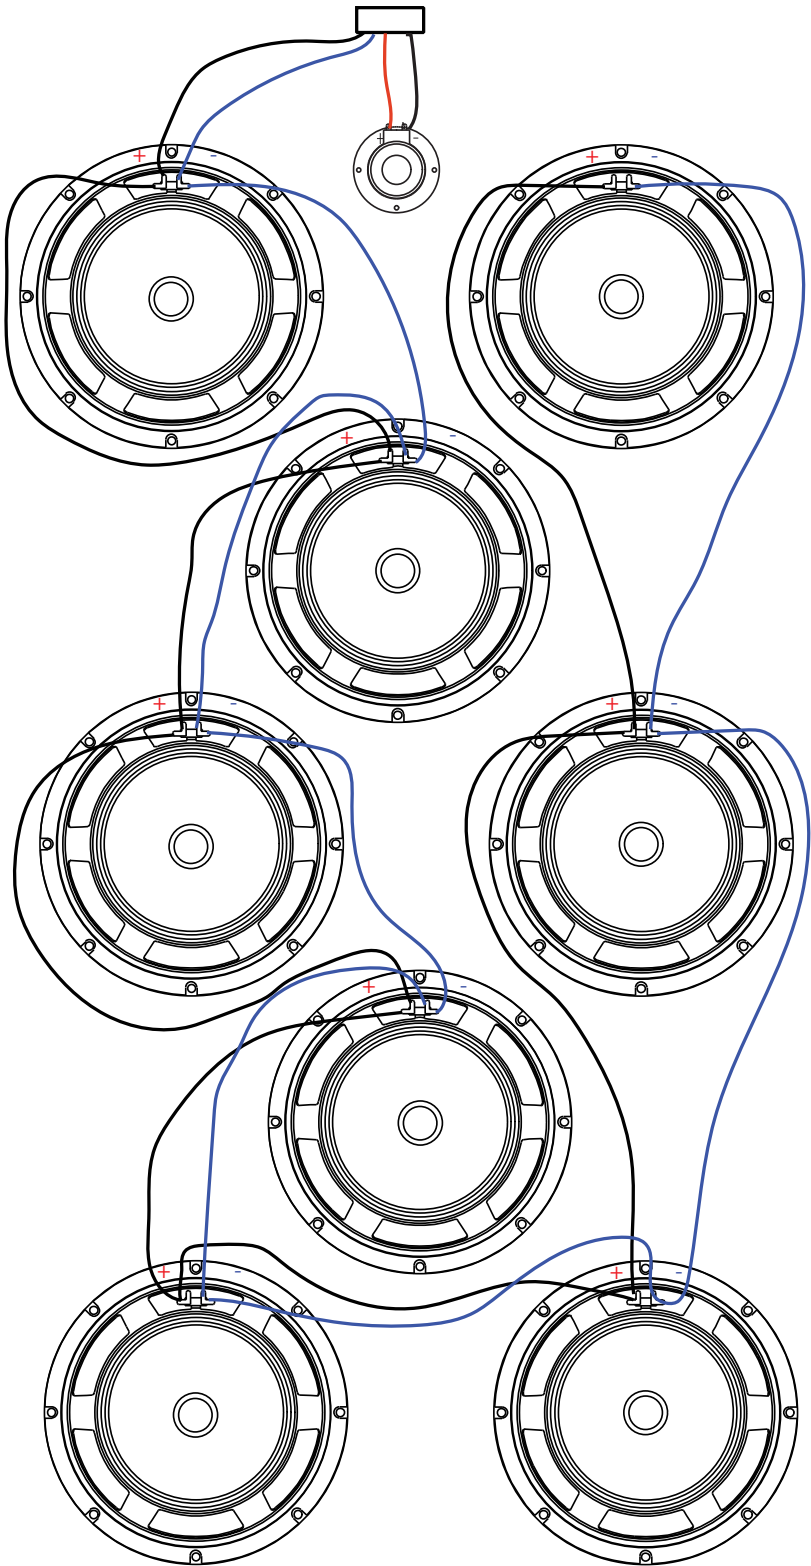


Series	Classic
Model	SVT-806HE
Type	8x6.5" enclosure w/ horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-126-08
Woofer Power Handling	50 Watts
Tweeter Part Number	86-007-01

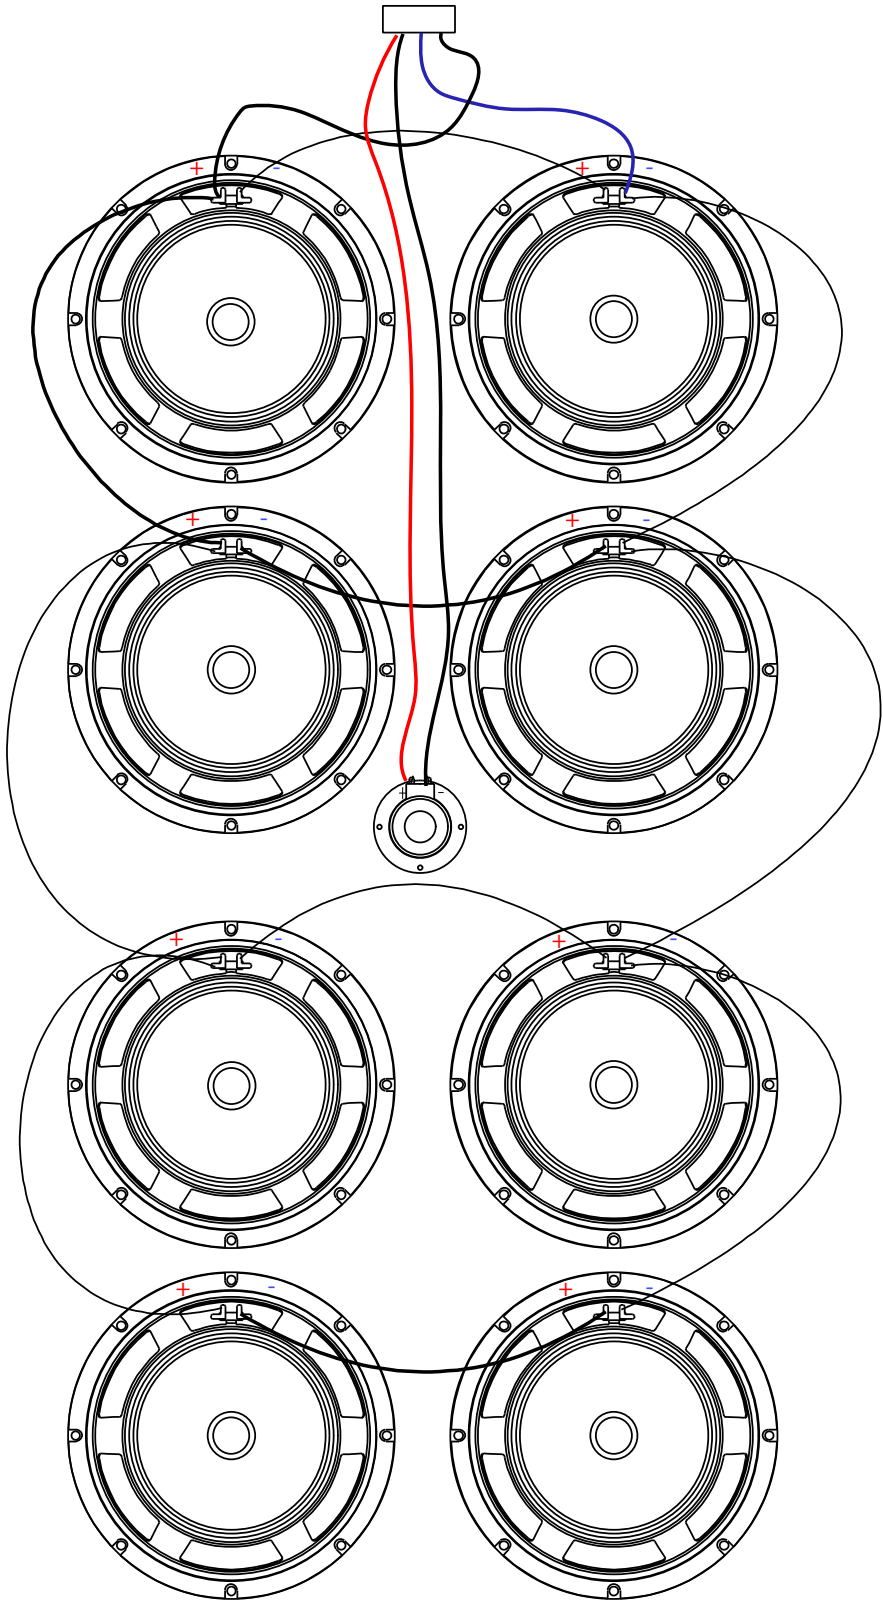


Series	Classic
Model	SVT-1540HE
Type	4x10", 1x15" enclosure w/horn
Cabinet Impedance	2x4 Ohms (bi-amp) 8 Ohms (full range)
Speaker Impedance	10"- 16 Ohms 15"- 4 Ohms
Wiring	Series/Parallel
Woofer Part Number	10"- N/A 15"- N/A
Woofer Power Handling	10"- N/A 15"- N/A
Tweeter Part Number	86-515-08

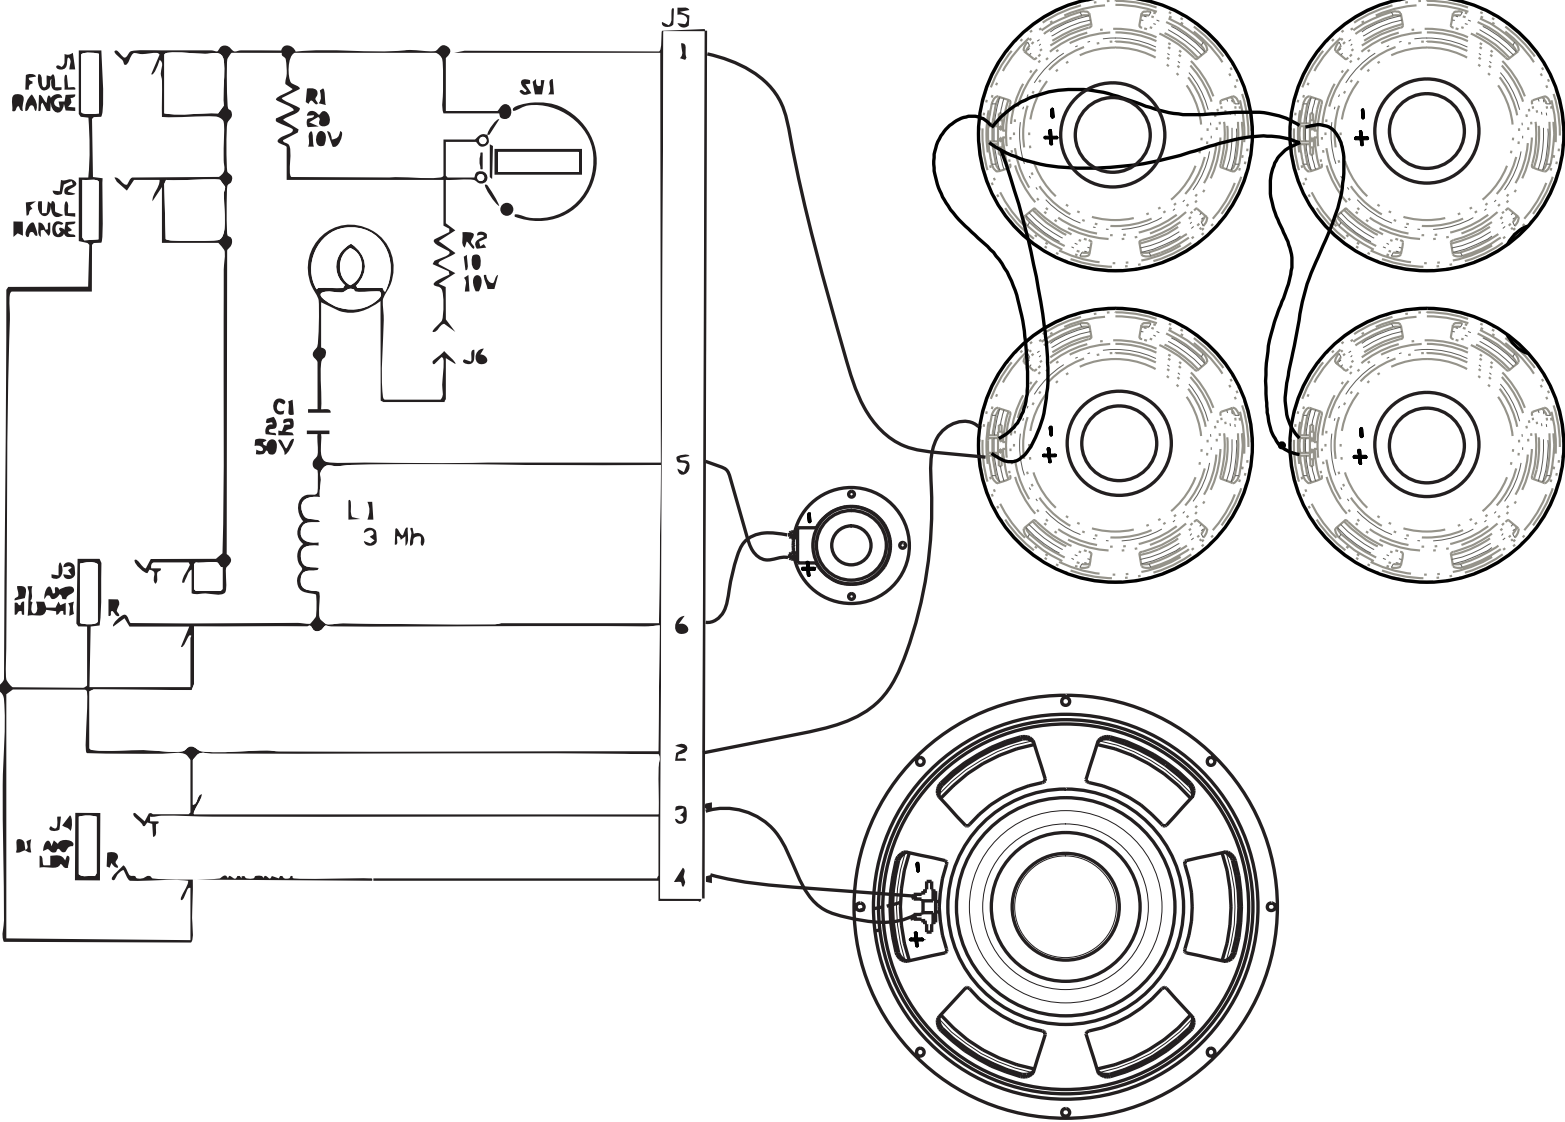


Series	Classic
Model	SVT-1510HE
Type	1x10", 1x15" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	10"- 16 Ohms 15"- 16 Ohms
Wiring	Parallel
Woofer Part Number	10"- N/A 15"- N/A
Woofer Power Handling	10"- N/A 15"- N/A
Tweeter Part Number	N/A

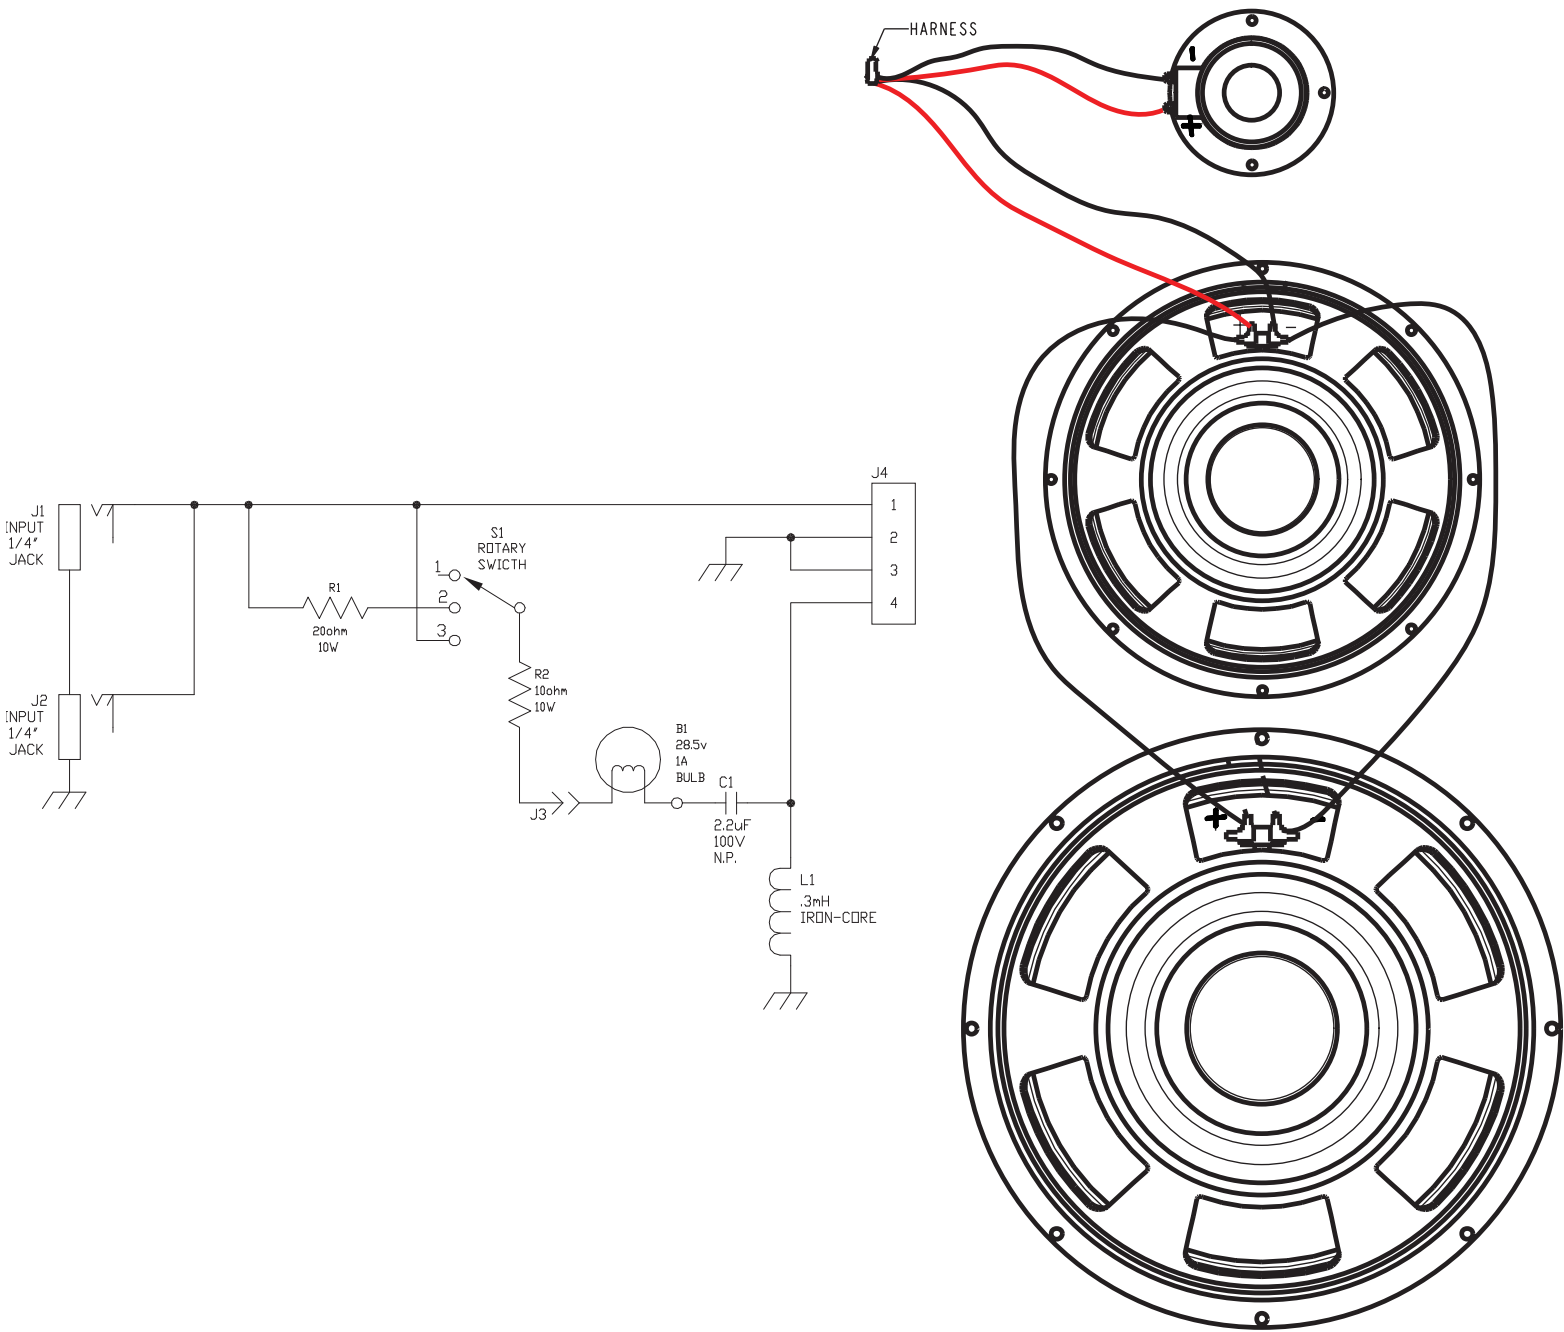


Series	Classic
Model	SVT-50DL Isovent, SVT-50HE
Type	2x10", 2x15" enclosure w/horn
Cabinet Impedance	2x8 Ohms (bi-amp) 4 Ohms (full range)
Speaker Impedance	10"- 16 Ohms 15"- 16 Ohms
Wiring	Parallel
Woofer Part Number	10"- N/A 15"- N/A
Woofer Power Handling	10"- 150 Watts 15"- 150 Watts
Tweeter Part Number	N/A

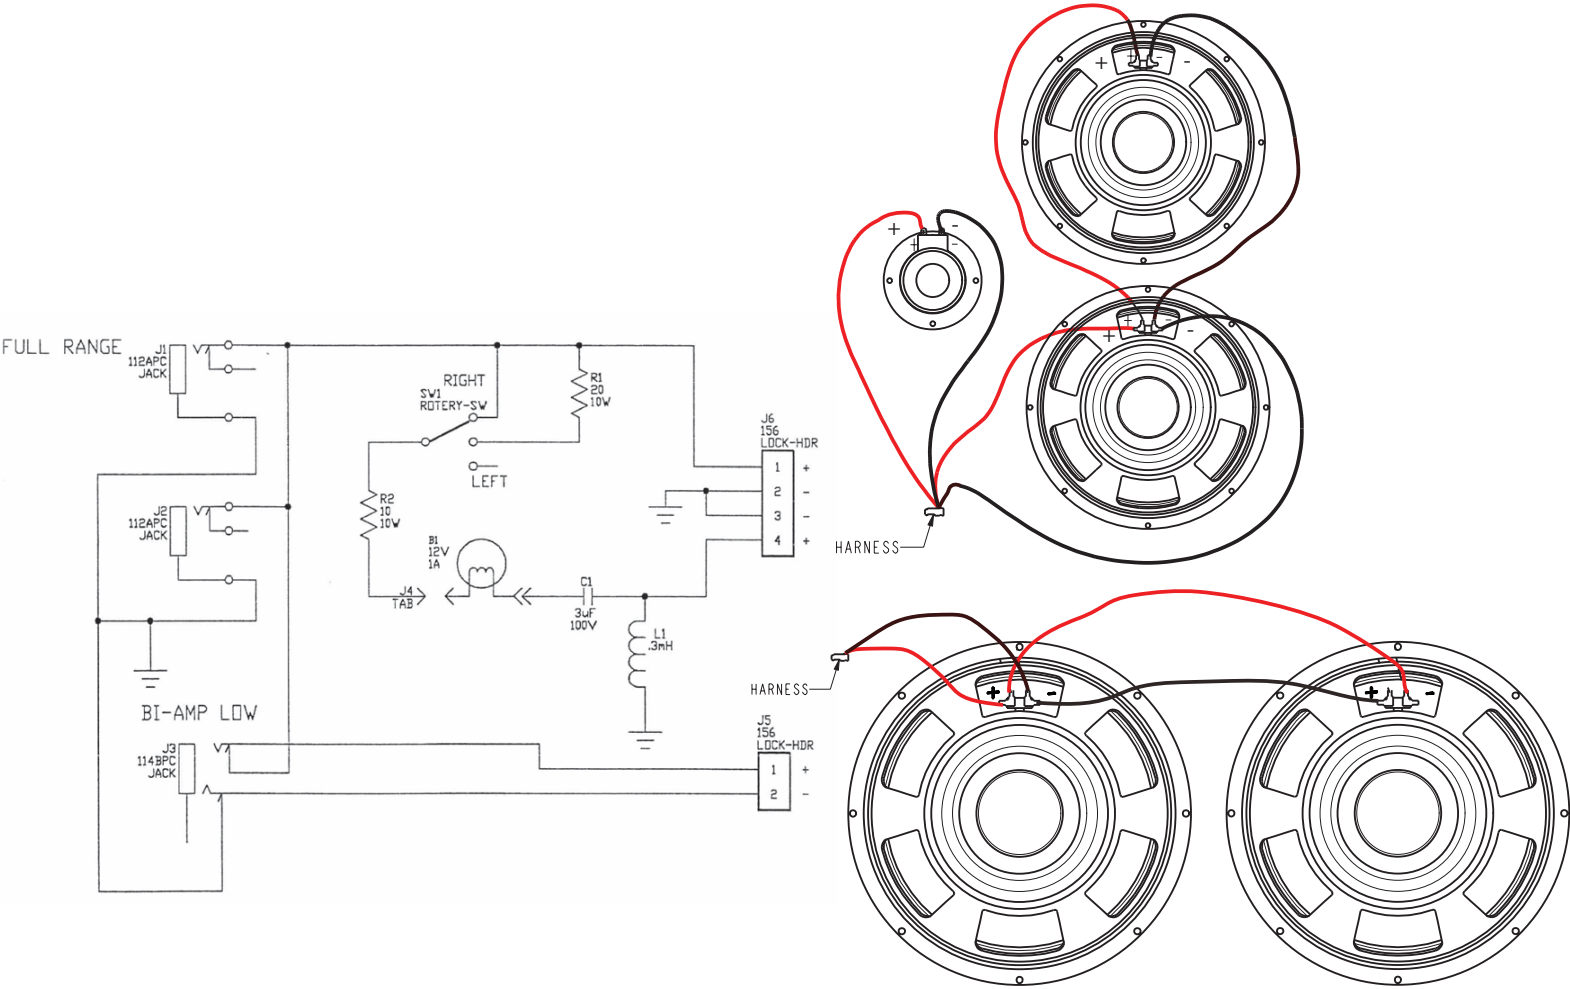


Series	Classic
Model	SVT-412HE
Type	4x12" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-107-04
Woofer Power Handling	110 Watts
Tweeter Part Number	86-515-08

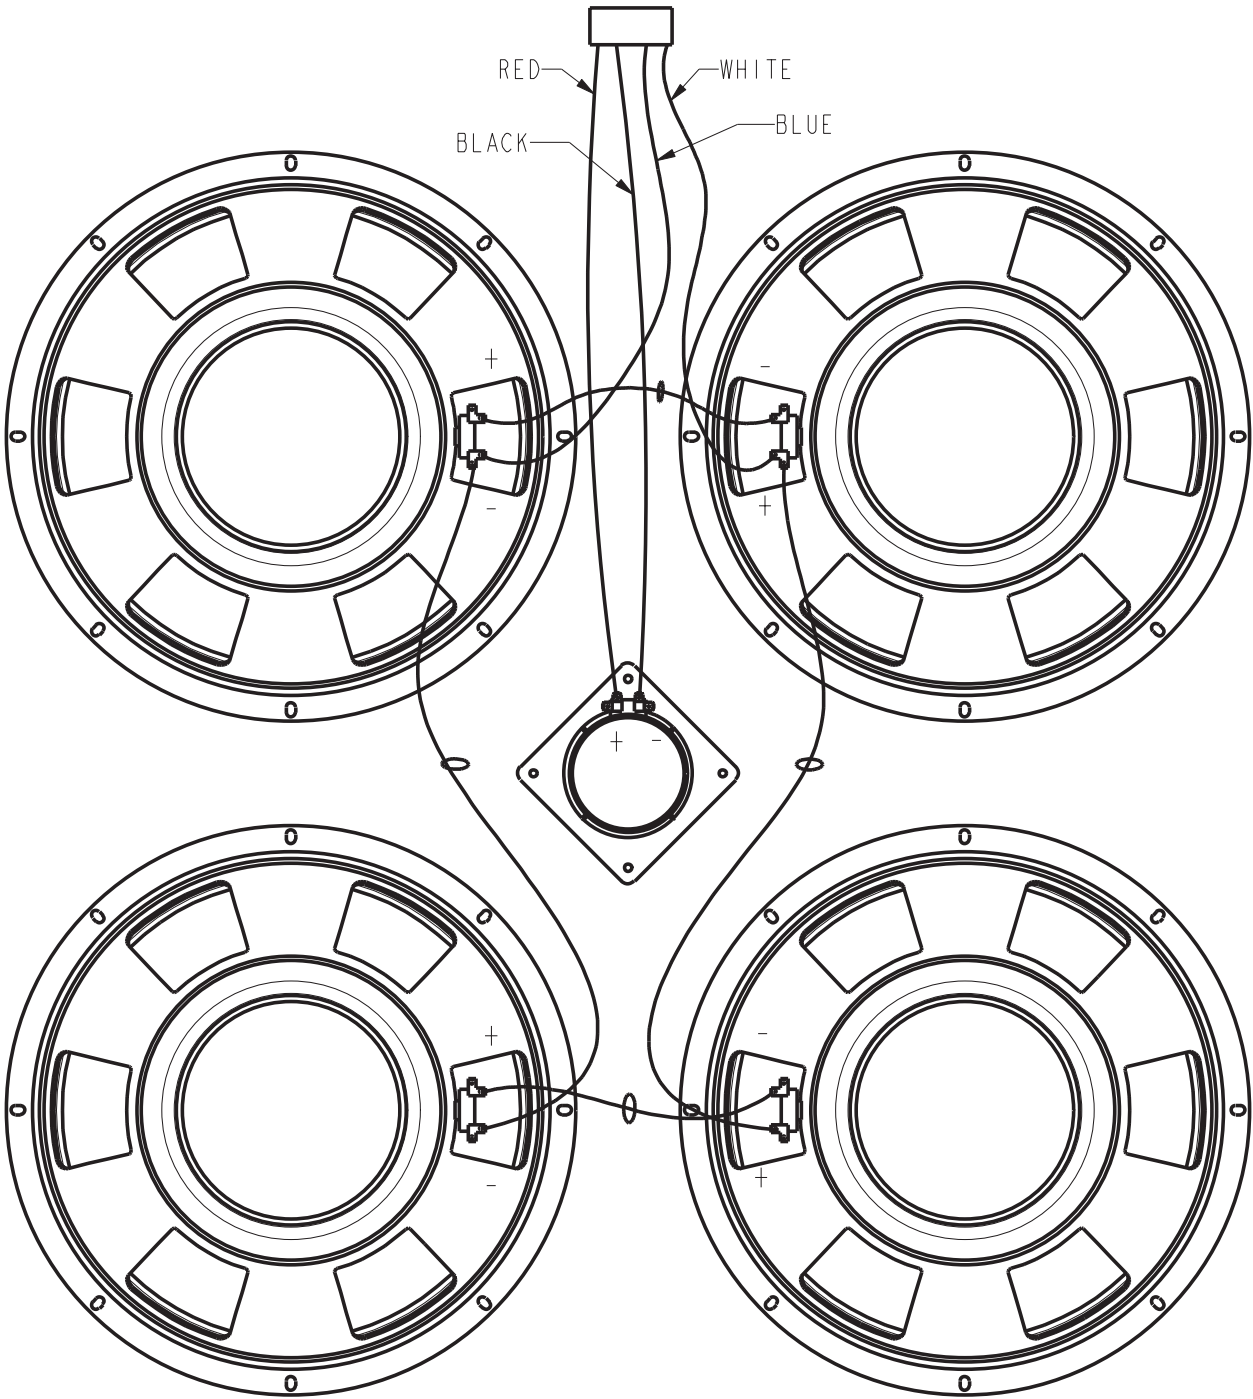


Series	Classic
Model	SVT-215E
Type	2x15" enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-511-08
Woofer Power Handling	150 Watts

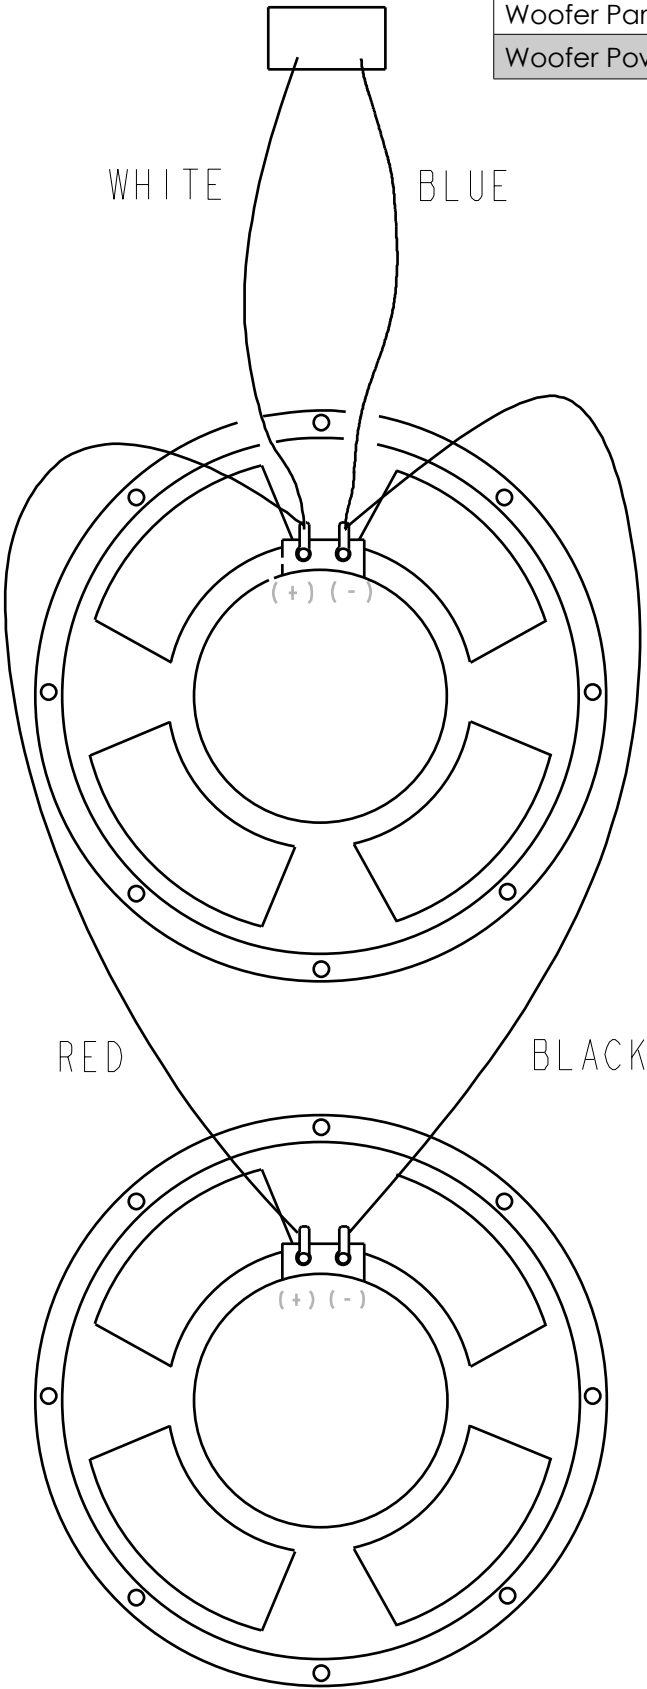


Series	Classic
Model	SVT-215LGS
Type	2x15" enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-151-08
Woofer Power Handling	300 Watts

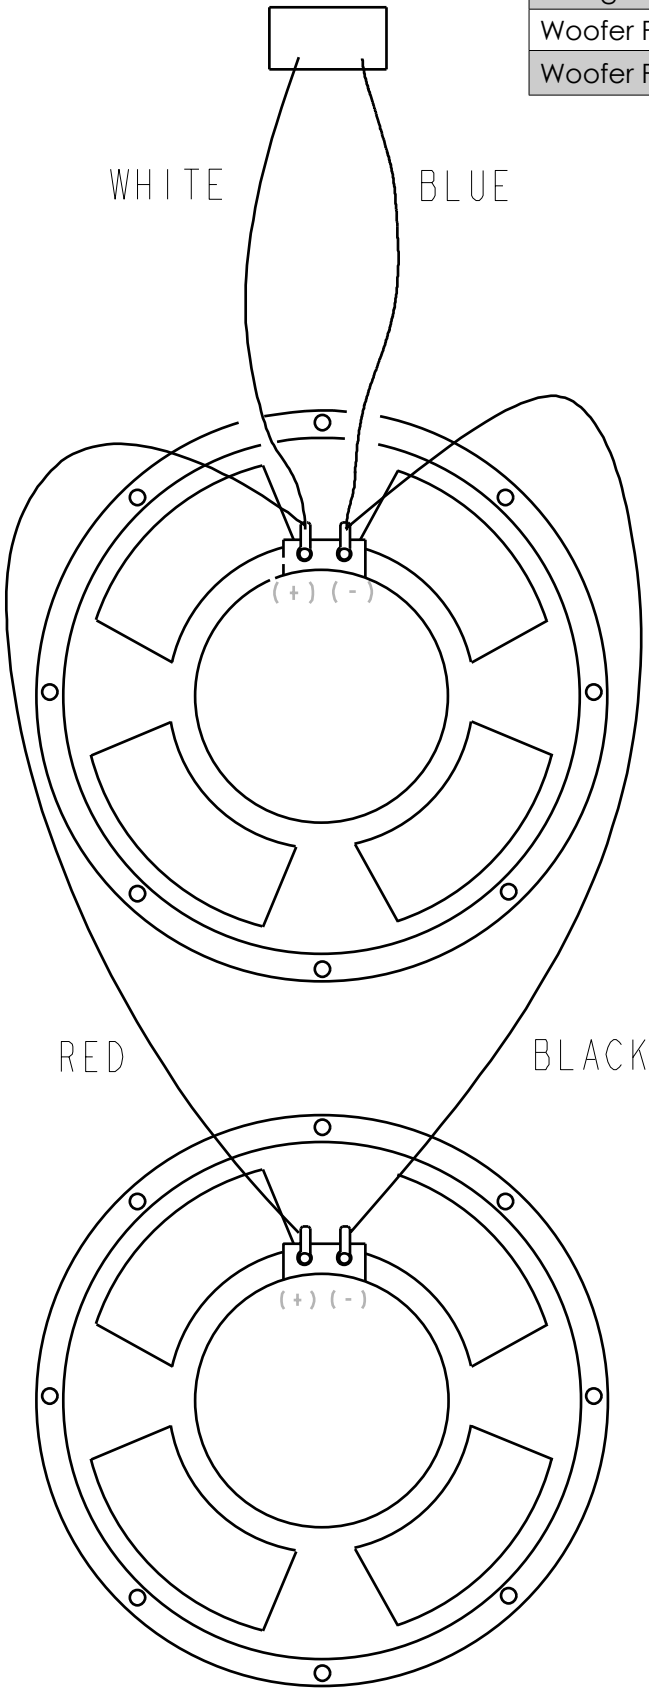


Series	Classic
Model	SVT-410HLN
Type	4x10" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-510-04
Woofer Power Handling	100 Watts
Tweeter Part Number	86-515-08
See Also	SVT-410HLN

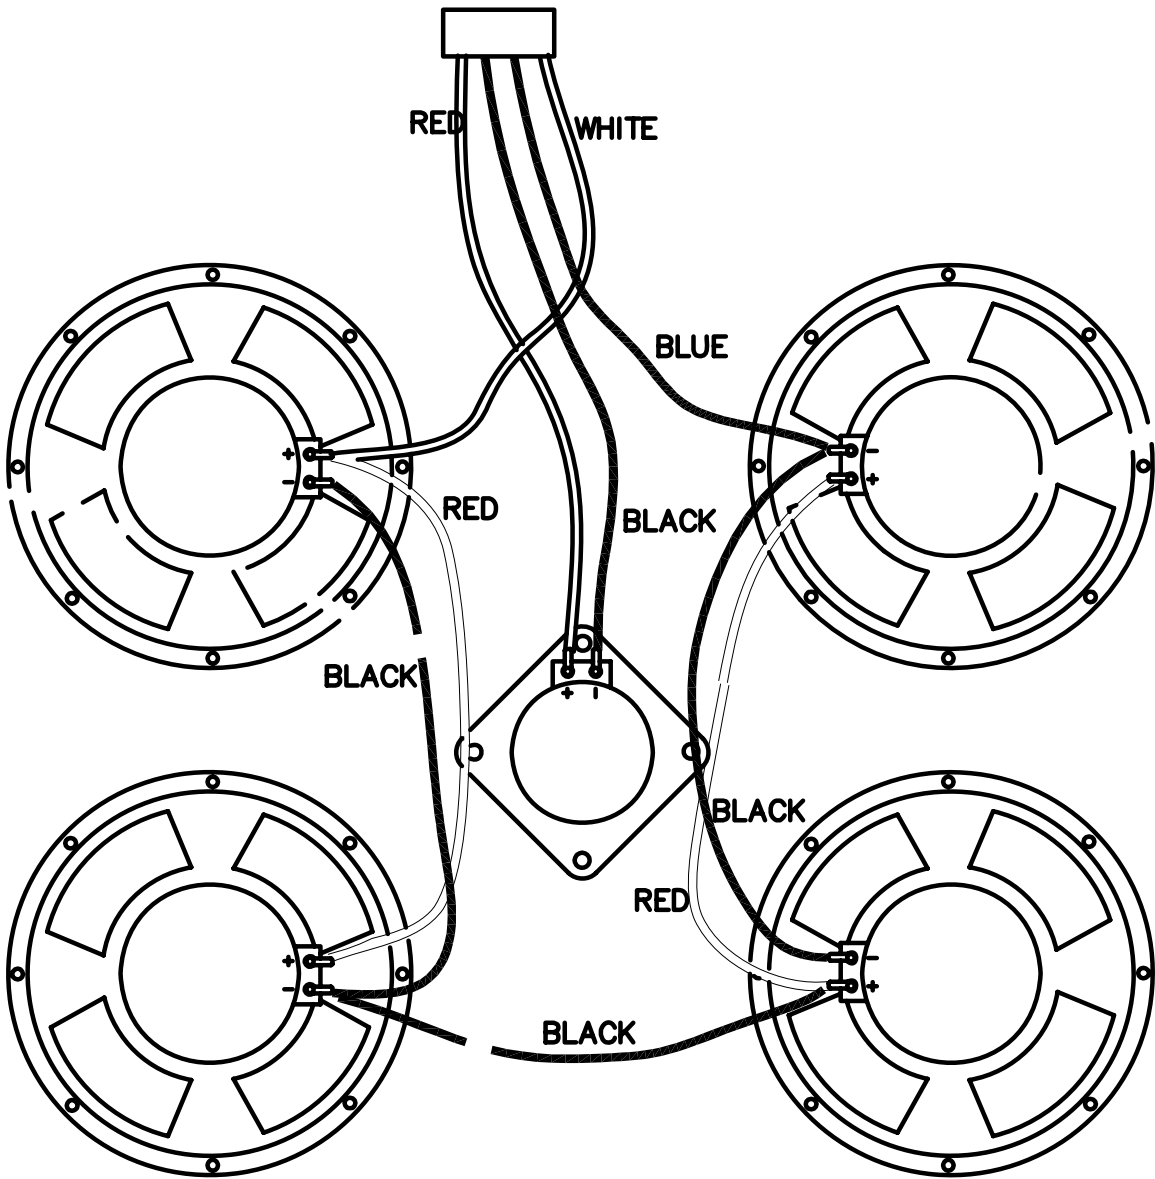


Series	Classic
Model	SVT-410HEN
Type	4x10" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	86-032-01
Woofer Power Handling	100 Watts
Tweeter Part Number	86-515-08
See Also	SVT-410HEN

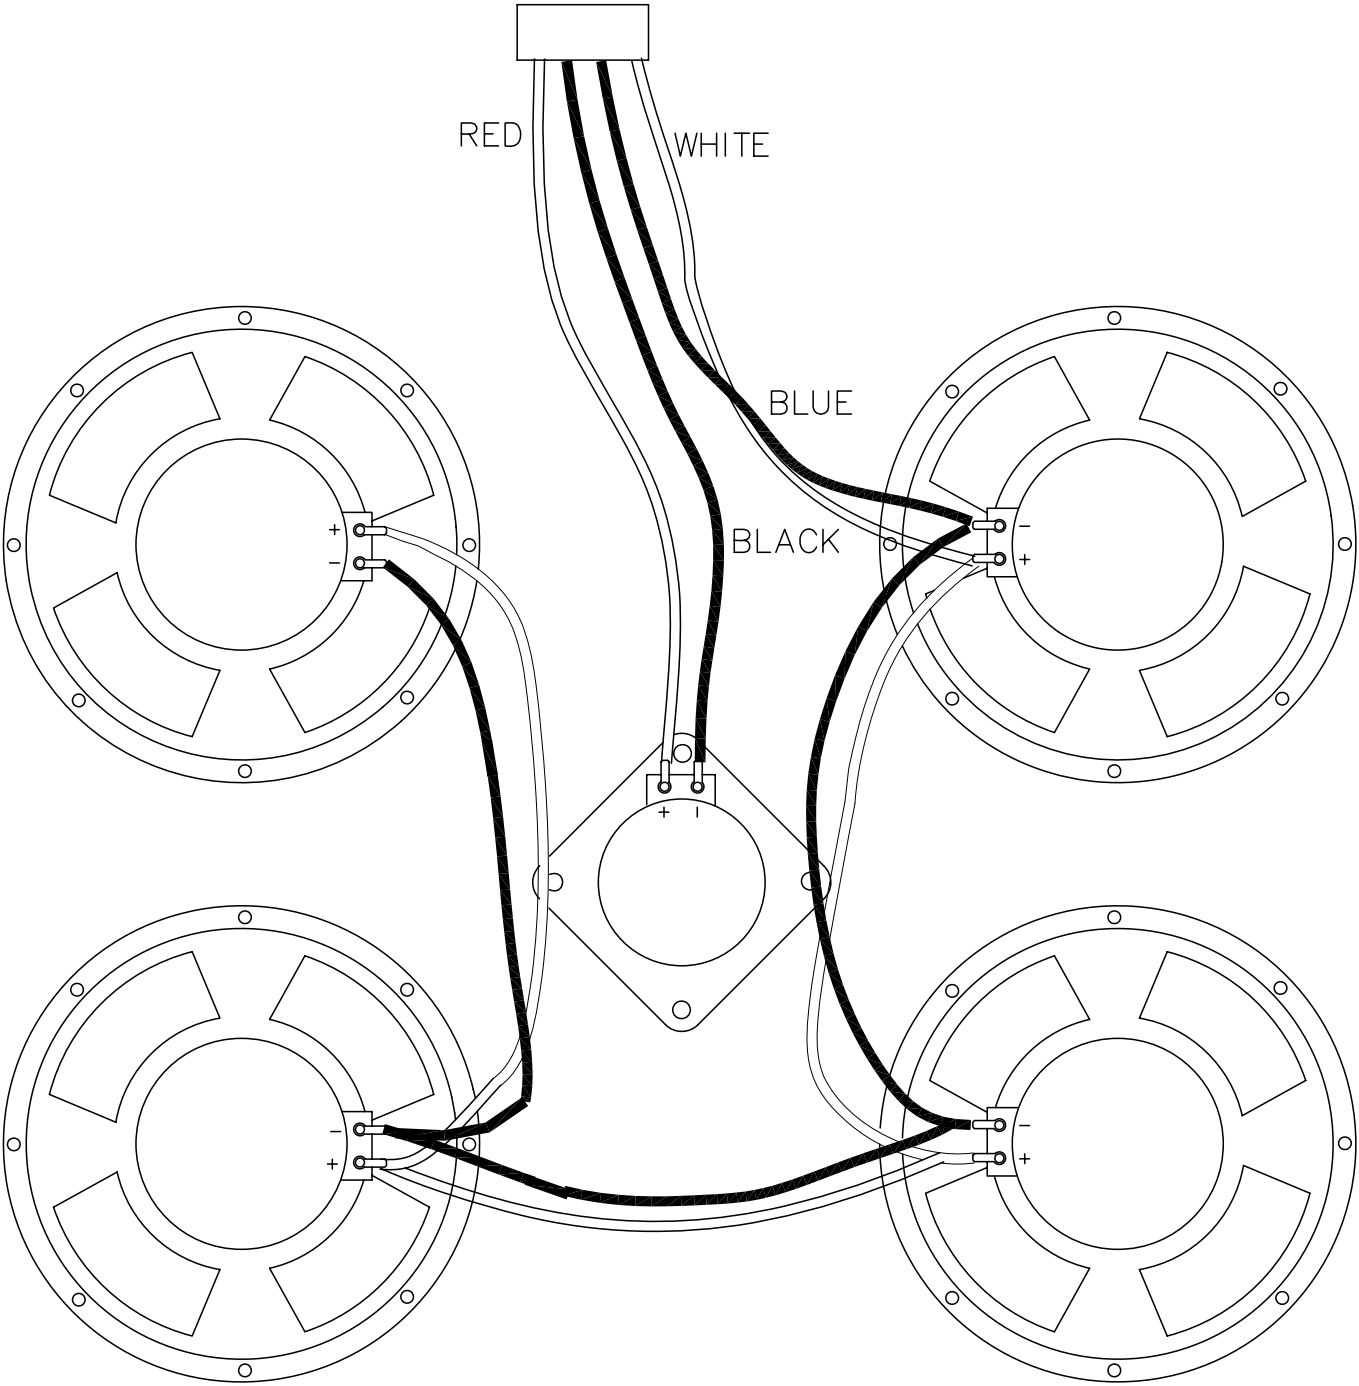

Series	Classic
Model	SVT-210HE, SVT-210HEN
Type	2x10" enclosure w/ horn
Cabinet Impedance	8 Ohms
Speaker Impedance	4 Ohms
Wiring	Series
Woofer Part Number	86-510-04
Woofer Power Handling	100 Watts
Tweeter Part Number	86-515-08

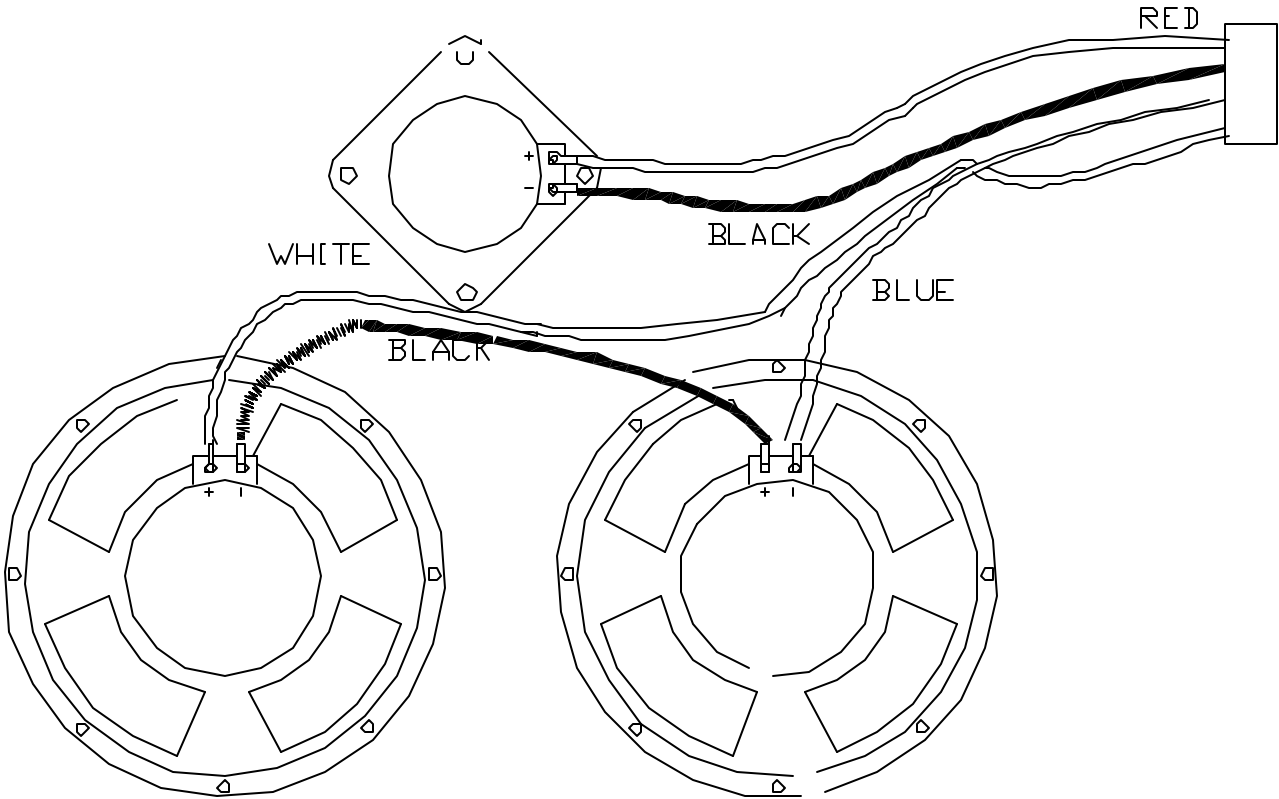


Series	Classic
Model	SVT-18, SVT-18E
Type	1x18" enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	4 Ohms
Woofer Part Number	86-179-04
Woofer Power Handling	300 Watts

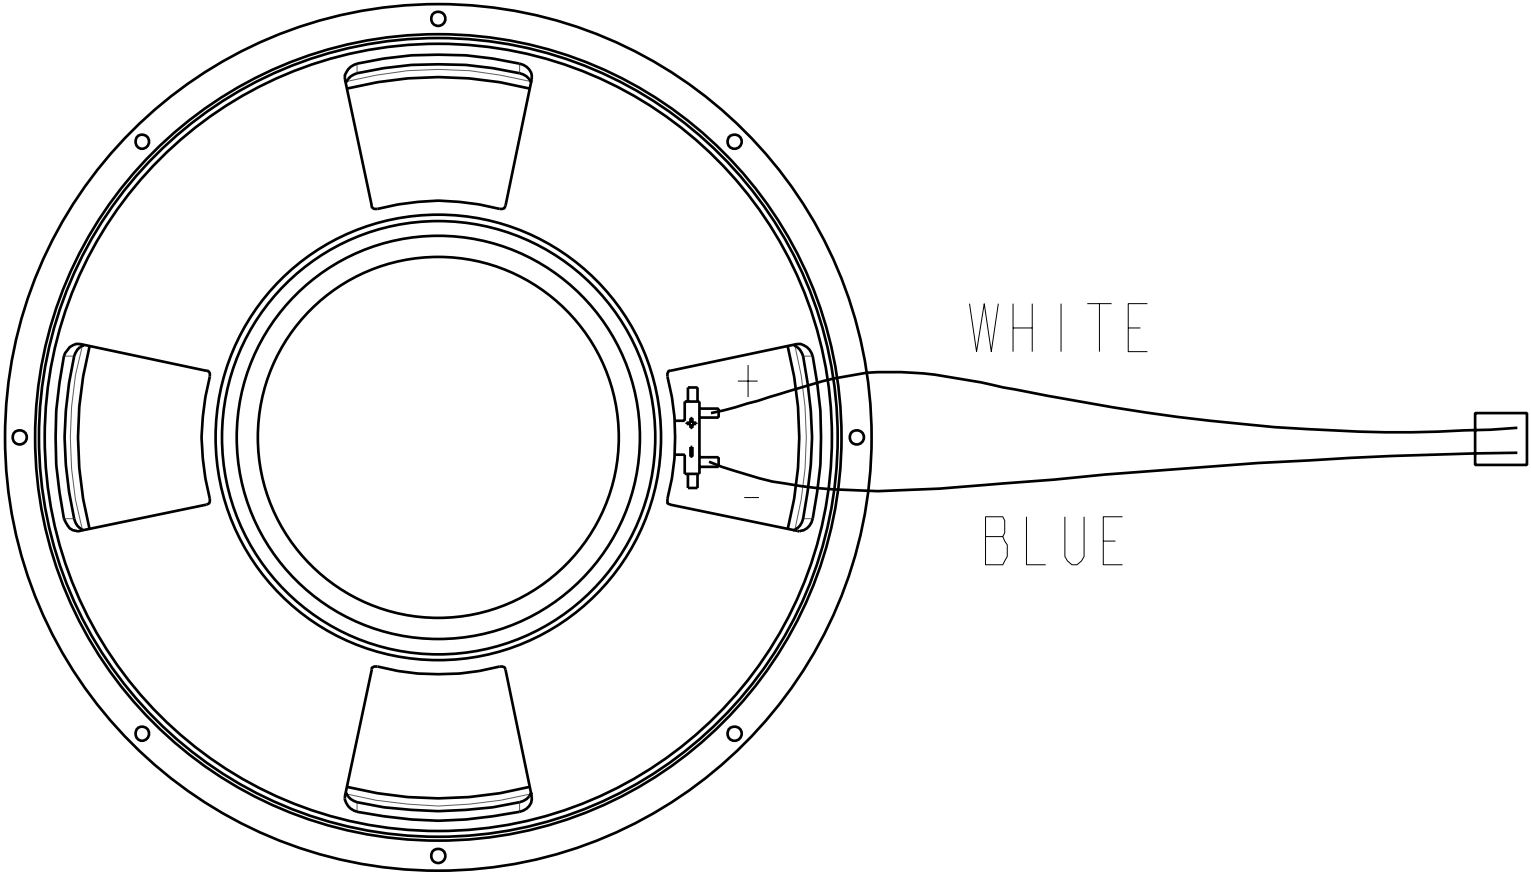


SPEAKER HOOKUP DIAGRAM

Series	Classic
Model	SVT-112HE
Type	1x12" enclosure w/horn
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Woofer Part Number	86-230-08
Woofer Power Handling	400 Watts
Tweeter Part Number	86-515-08

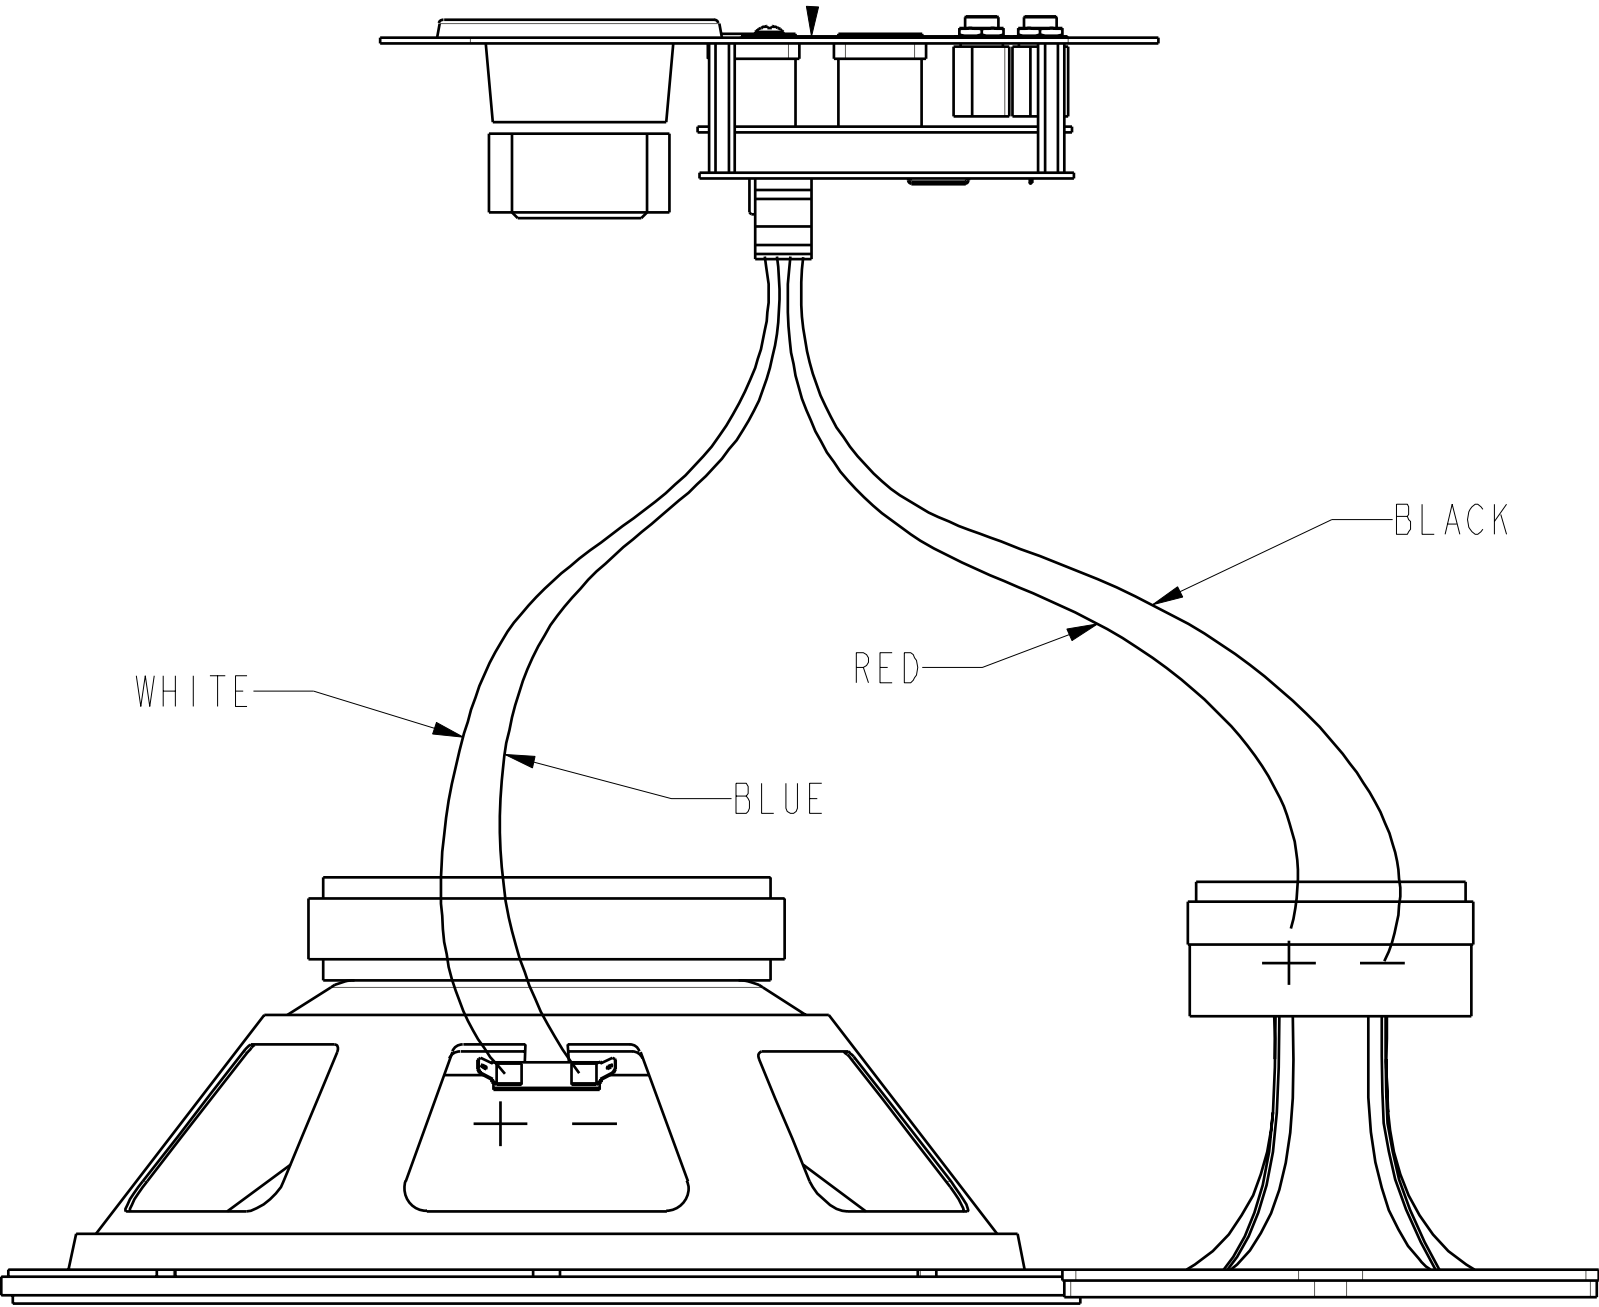


DETAIL "B"
SPEAKER WIRING


Series	SVR
Model	SVR-215
Type	2x15" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-511-08
Woofer Power Handling	200 Watts
Tweeter Part Number	N/A

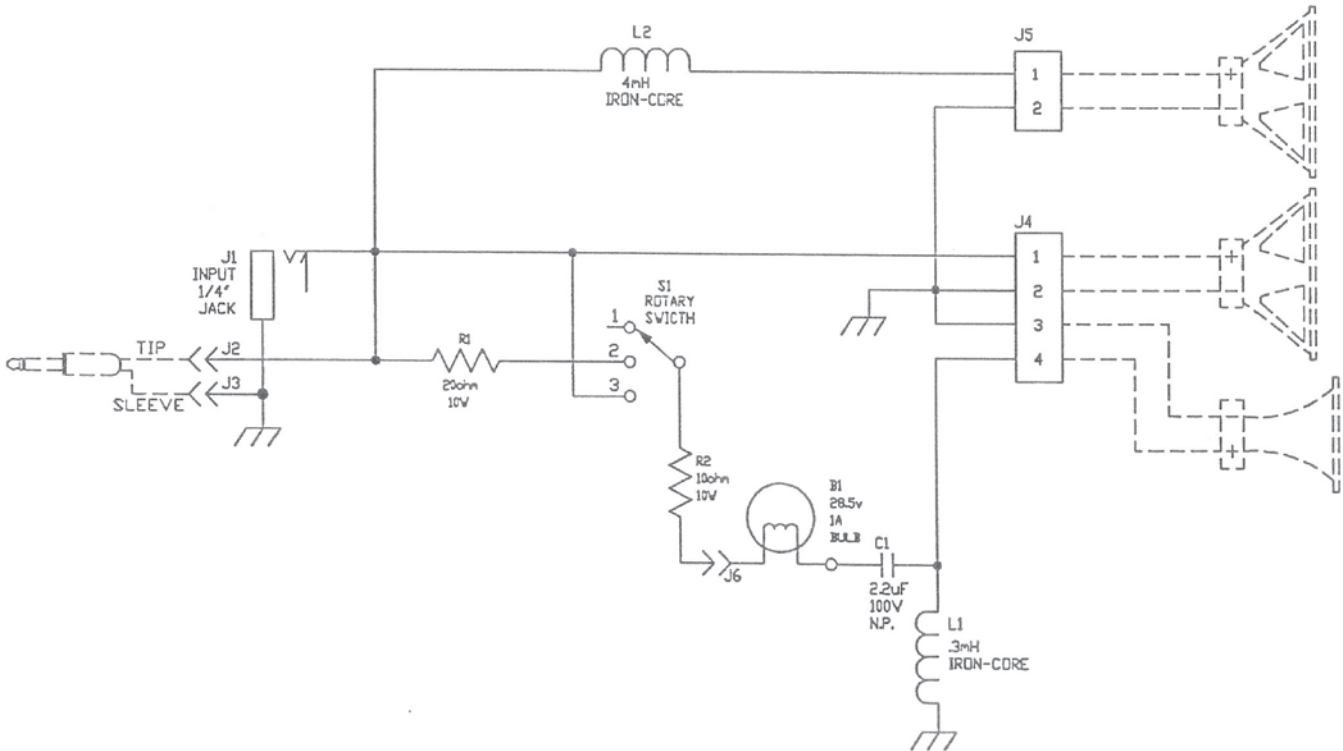


Series	SVR
Model	SVR-212
Type	2x12" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-516-08
Woofer Power Handling	200 Watts
Tweeter Part Number	N/A

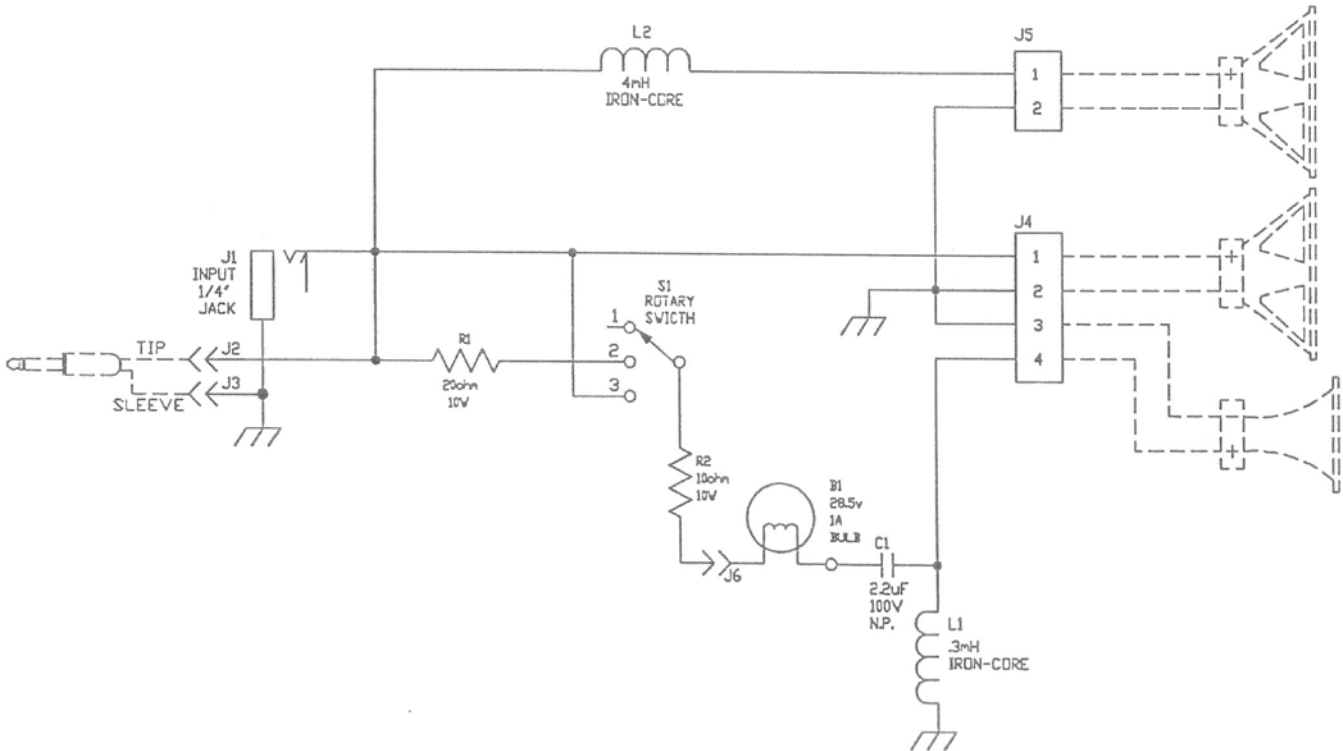


Series	DD (Dual Drive)
Model	DD-15
Type	2x15" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-511-08
Woofer Power Handling	200 Watts
Tweeter Part Number	N/A

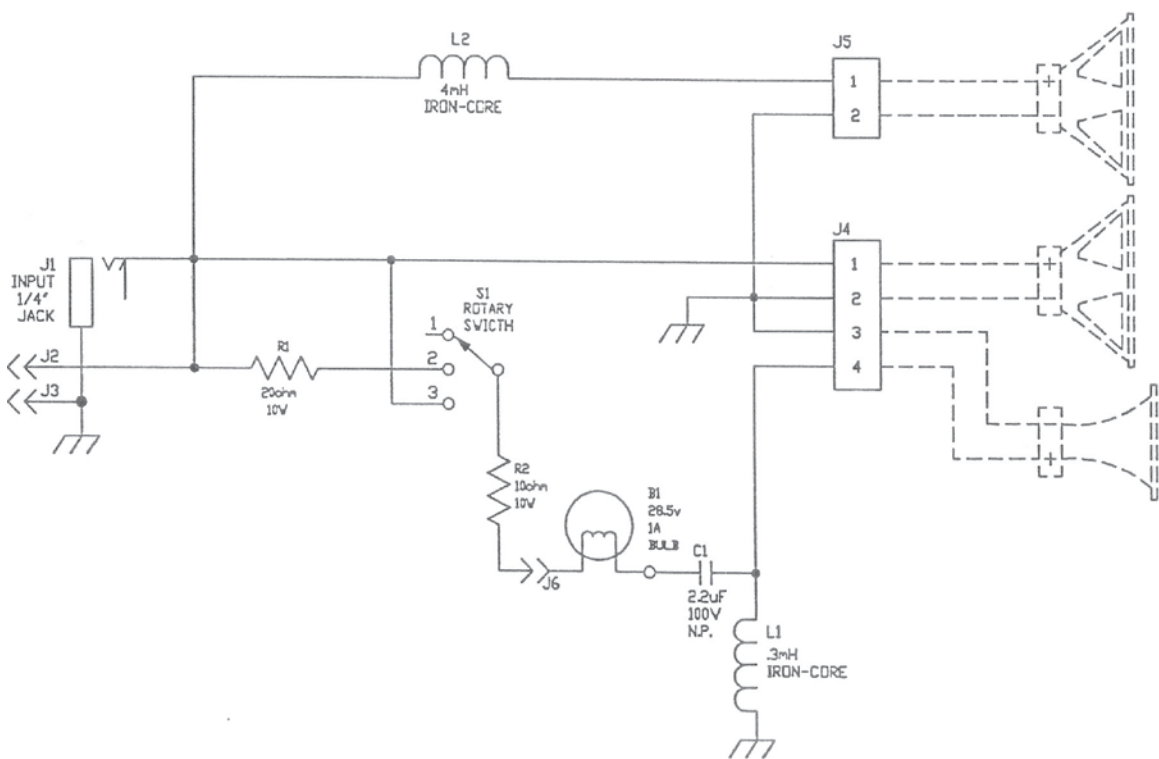


Series	DD (Dual Drive)
Model	DD-12
Type	2x12" enclosure w/horn
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	86-516-08
Woofer Power Handling	200 Watts
Tweeter Part Number	N/A

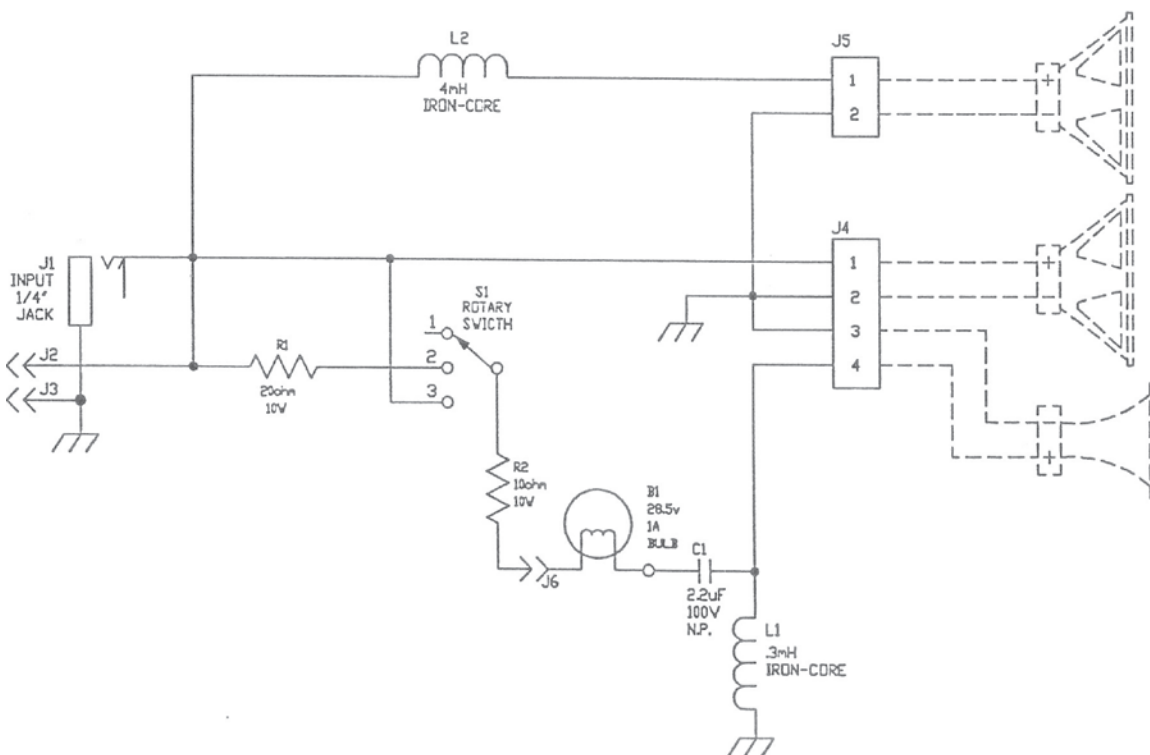


Series	V (70s)
Model	V-9
Type	9x10" speaker enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	5.3 Ohms
Wiring	Series/Parallel
Woofer Part Number	508167-1
Woofer Power Handling	34 Watts (approximate)

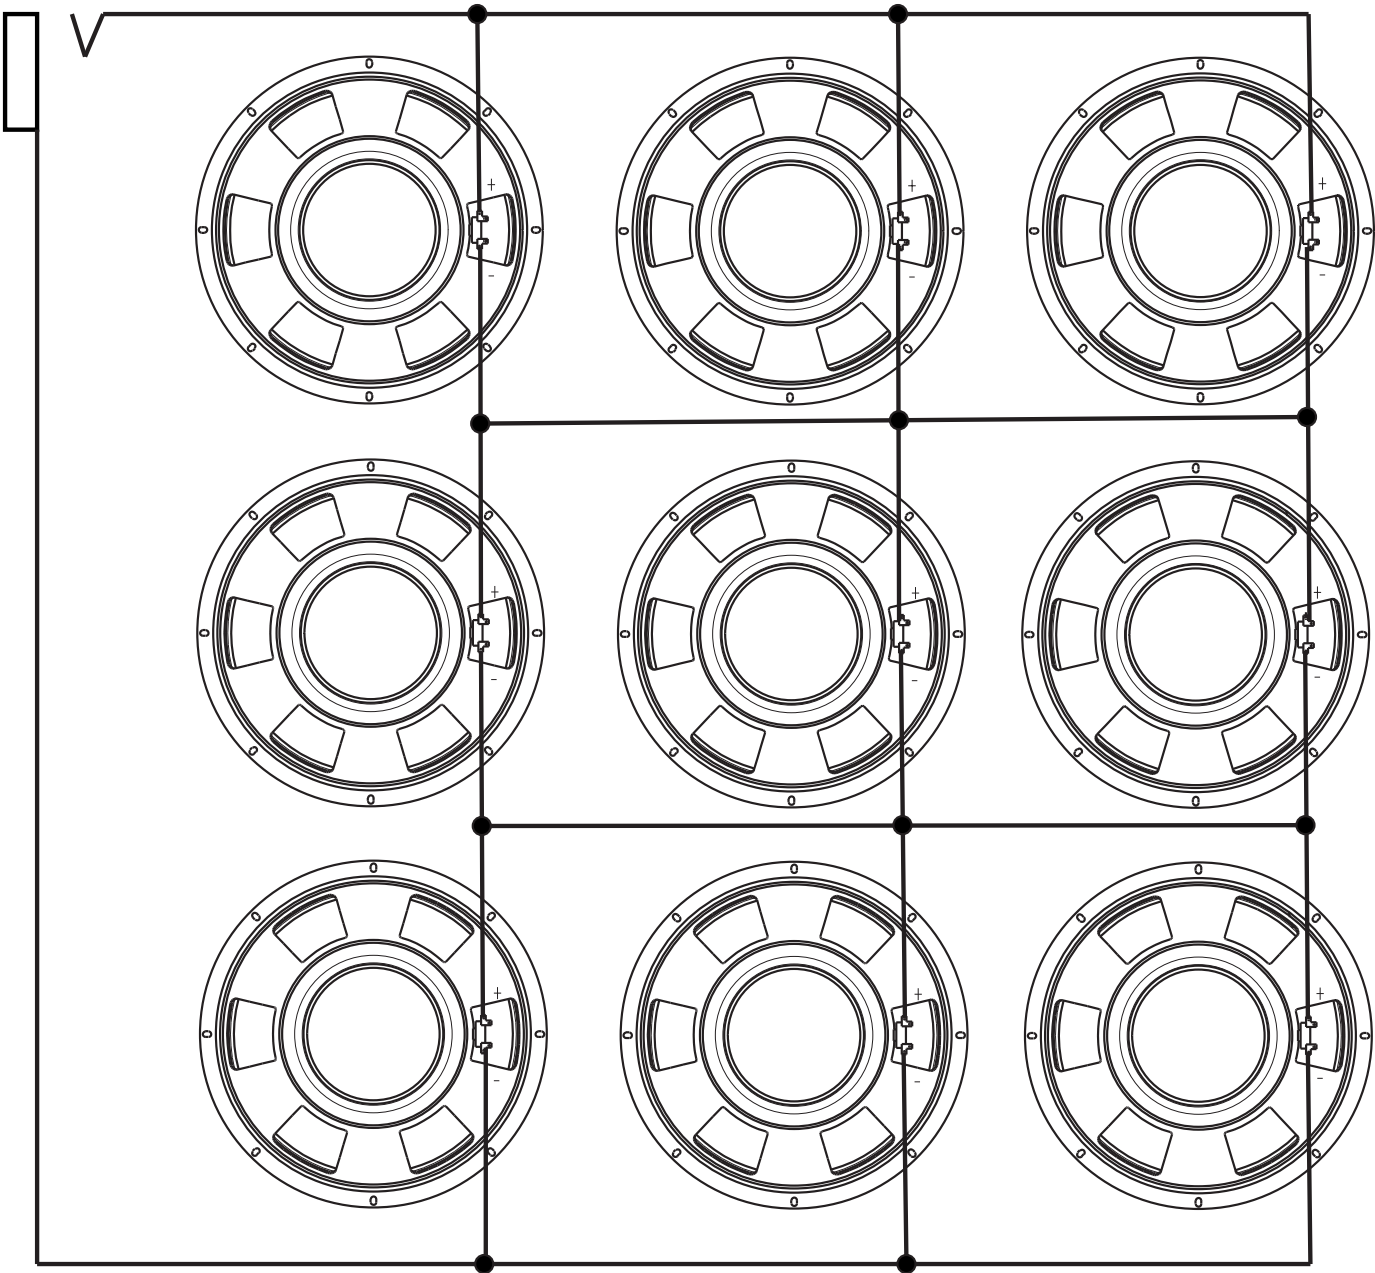


V9 ENCLOSURE

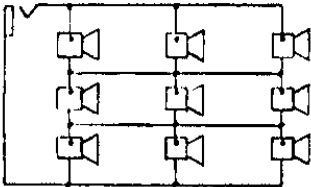


Series	V (70s)
Model	V-6
Type	2x12", enclosure w/Mid-range Driver and tweeter
Cabinet Impedance	8 Ohms
Speaker Impedance	12"- 16 Ohms
Wiring	Parallel
Woofer Part Number	12"- 580170-1 Midrange Horn- 580169-1 Driver- 580171-1
Woofer Power Handling	12"- 60 Watts Mid+Tweeter- 60 Watts
Tweeter Part Number	580172-1

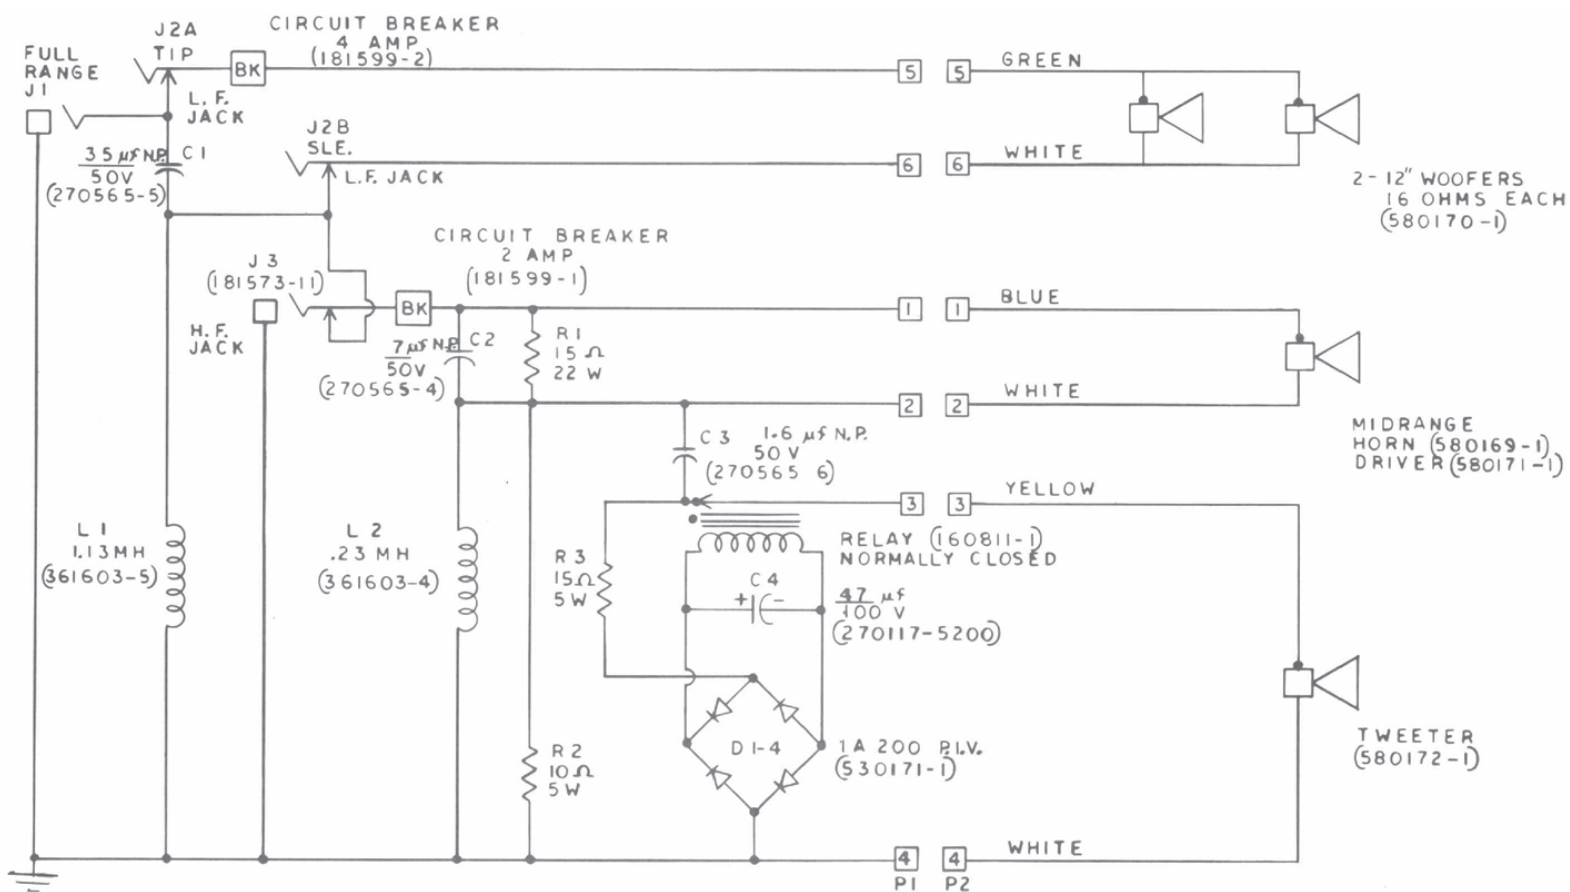


Series	V (70s)
Model	V-6B
Type	2x15" speaker enclosure
Cabinet Impedance	4 or 16 Ohms
Speaker Impedance	8 Ohms
Wiring	Series or Parallel
Woofer Part Number	508165-3
Woofer Power Handling	120 Watts

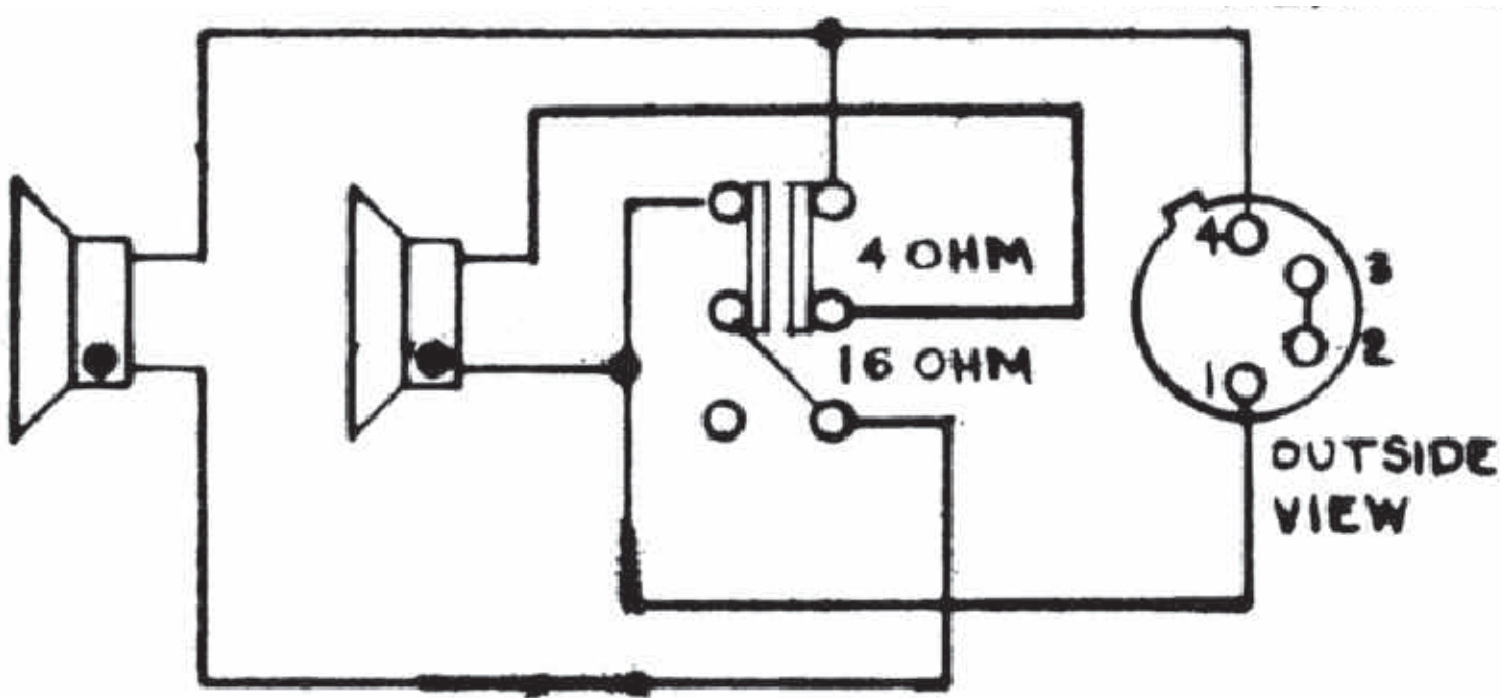



Series	V (70s)
Model	V-4
Type	4x12" speaker enclosure
Cabinet Impedance	8 Ohms
Speaker Impedance	8 Ohms
Wiring	Series/Parallel
Woofer Part Number	508151-1
Woofer Power Handling	34 Watts (approximate)

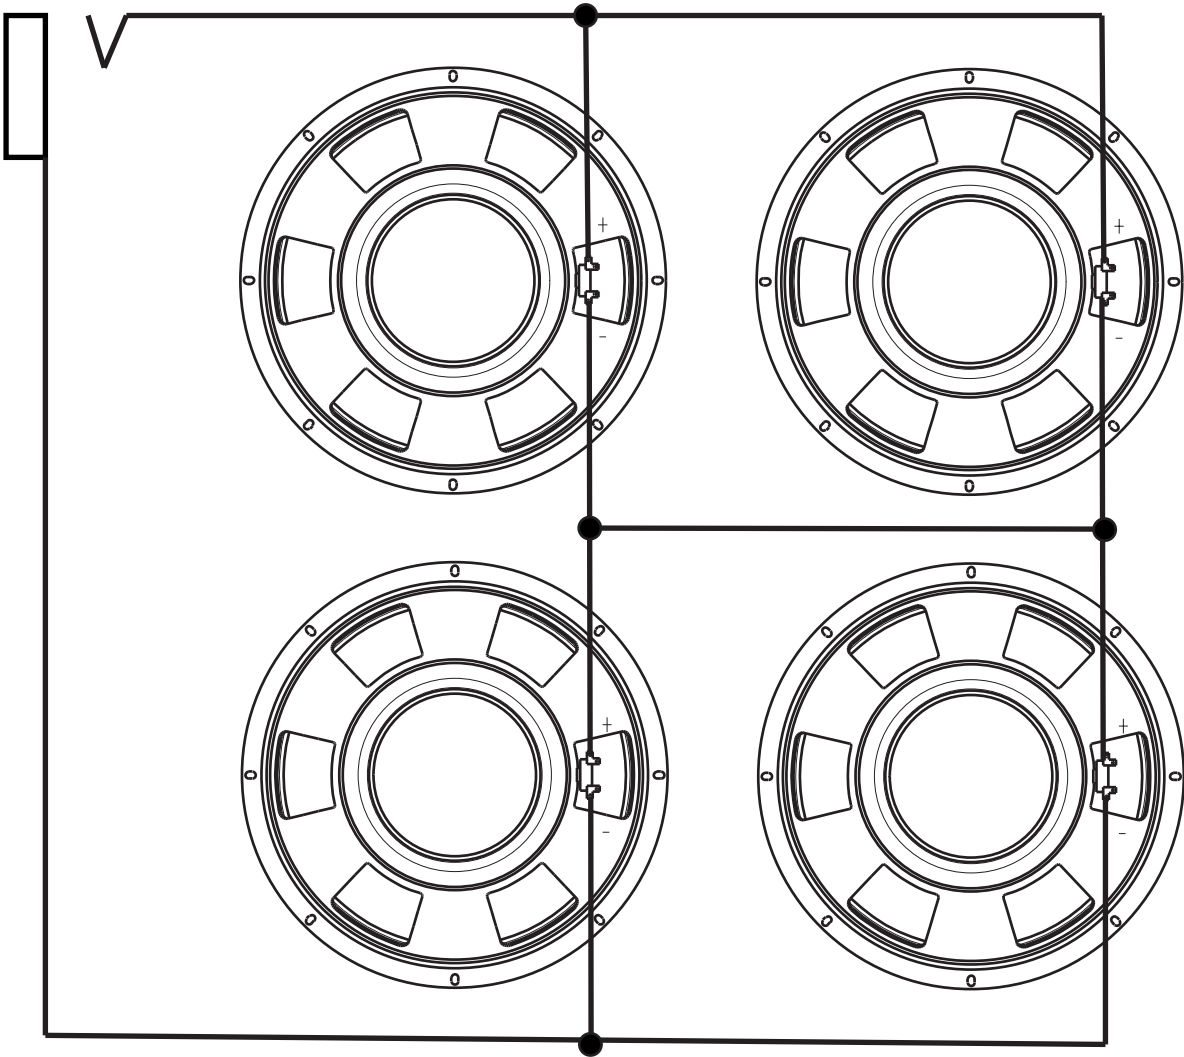


Series	B (60s-70s)
Model	B25B
Type	2x15" speaker enclosure
Cabinet Impedance	4 or 16 Ohms
Speaker Impedance	8 Ohms
Wiring	Series or Parallel
Woofer Part Number	508154-1
Woofer Power Handling	65 Watts

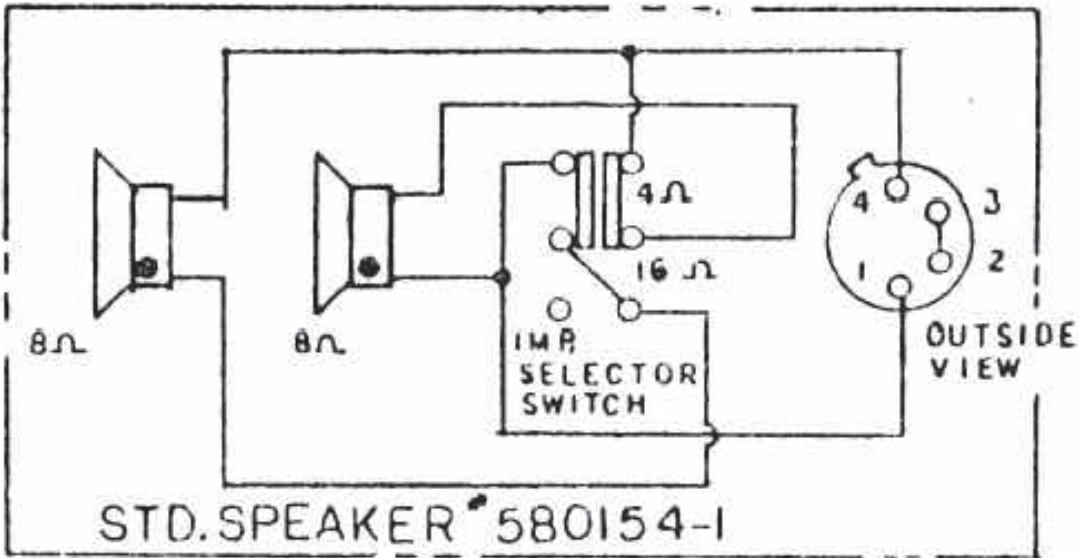


Series	B (70s)
Model	B40
Type	4x10" speaker enclosure
Cabinet Impedance	8 Ohms
Speaker Impedance	32 Ohms
Wiring	Parallel
Woofer Part Number	580155-1
Woofer Power Handling	30 Watts

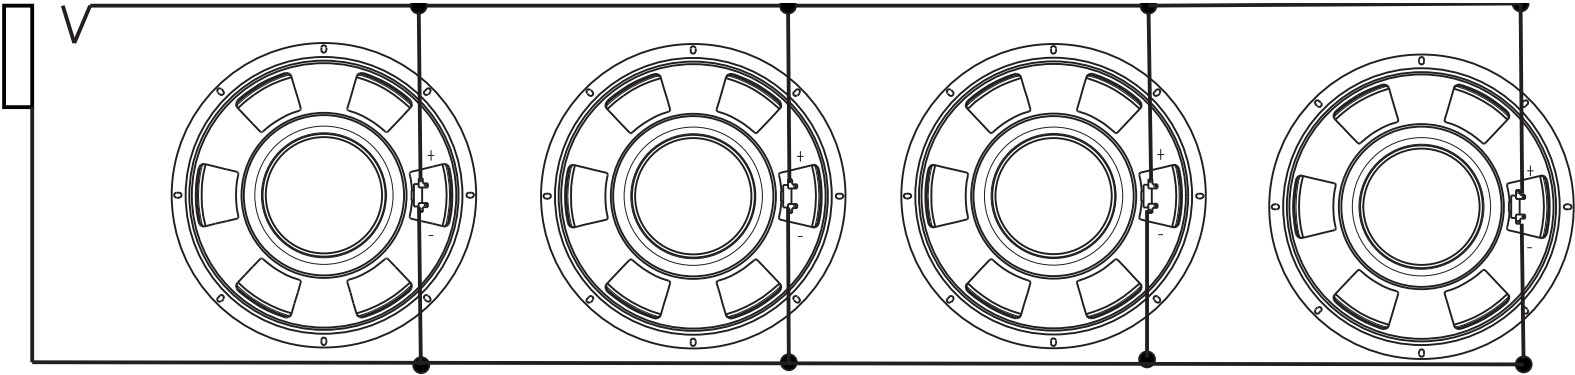


Series	BT (60s-70s)
Model	BT-25, BT-25L, BT-140
Type	2x15" speaker enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	BT-25*: 6930-009 BT-25L**: 6930-031 BT-140***: 6930-001
Woofer Power Handling	60 Watts
	*CTS speakers **Altec Lansing speakers ***J.B. Lansing speakers

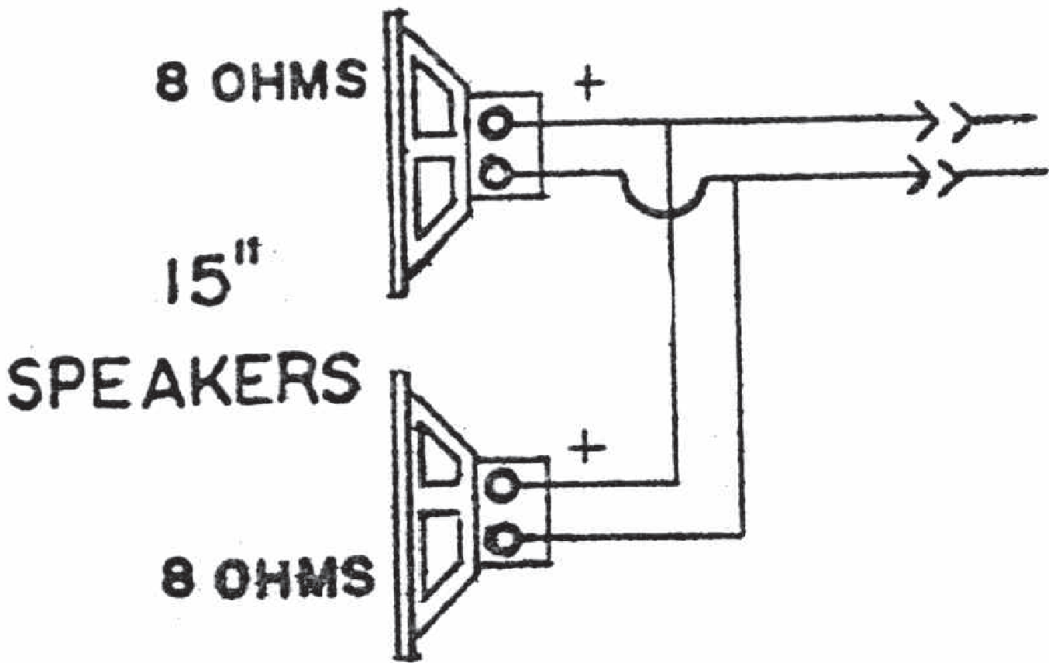



Series	G (1975-1980)
Model	G-60
Type	6x10" speaker enclosure
Cabinet Impedance	8 Ohms
Speaker Impedance	5.3 Ohms
Wiring	Series/Parallel
Woofer Part Number	580167-1
Woofer Power Handling	40 Watts

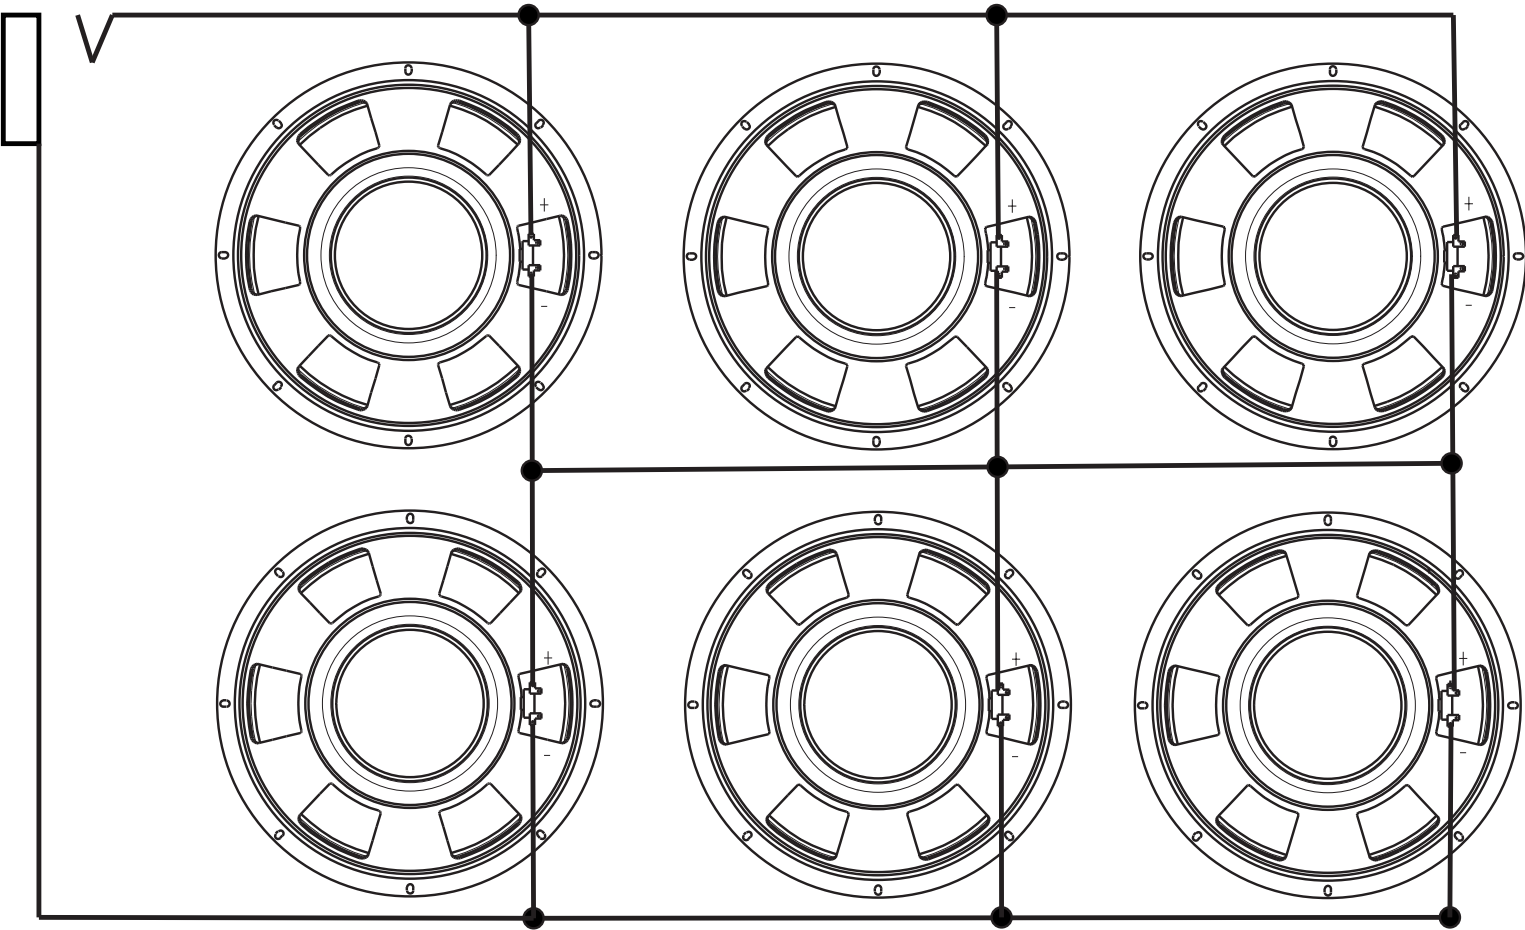

Series	SBT (1970)
Model	SBT
Type	2x15" speaker enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	69300340
Woofer Power Handling	60 Watts

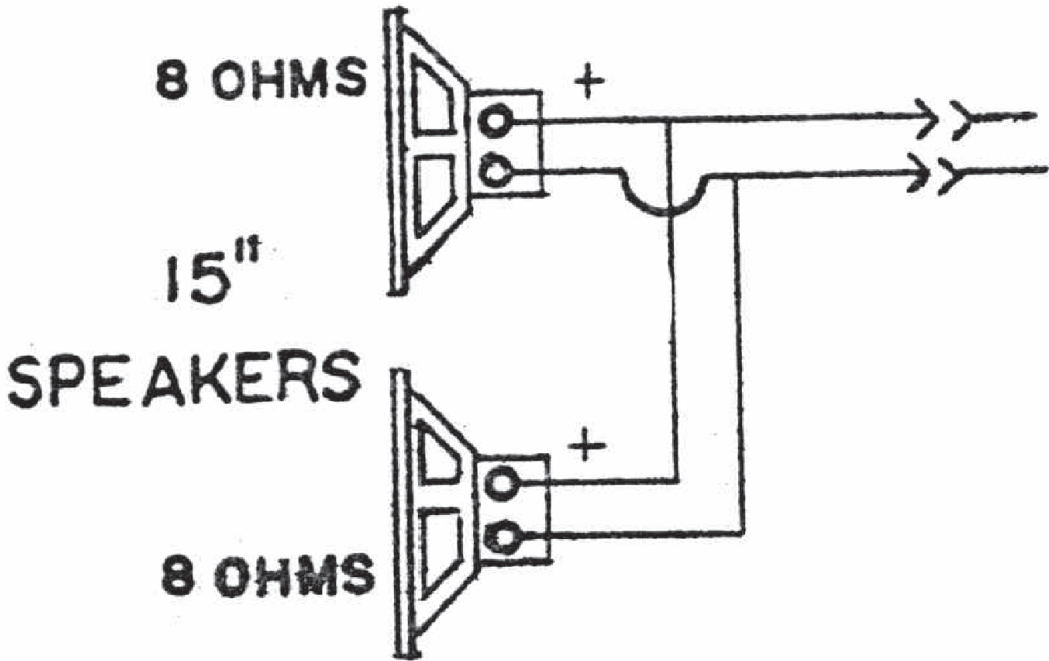


Series	SST (1970)
Model	SST
Type	4x12" speaker enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	16 Ohms
Wiring	Parallel
Woofer Part Number	N/A
Woofer Power Handling	30 Watts

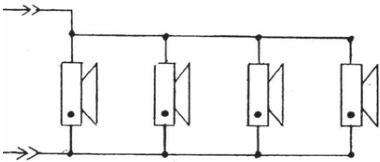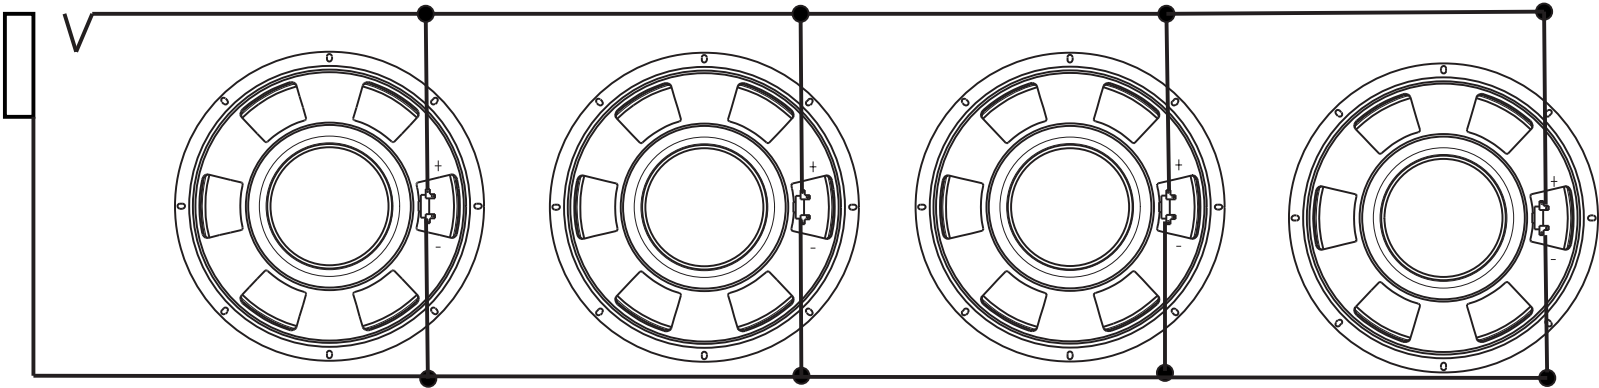


16Ω SPEAKERS (4) SST ONLY


Series	ST (60s)
Model	ST-42
Type	4x12" speaker enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	16 Ohms
Wiring	Parallel
Woofer Part Number	6920-056
Woofer Power Handling	30 Watts

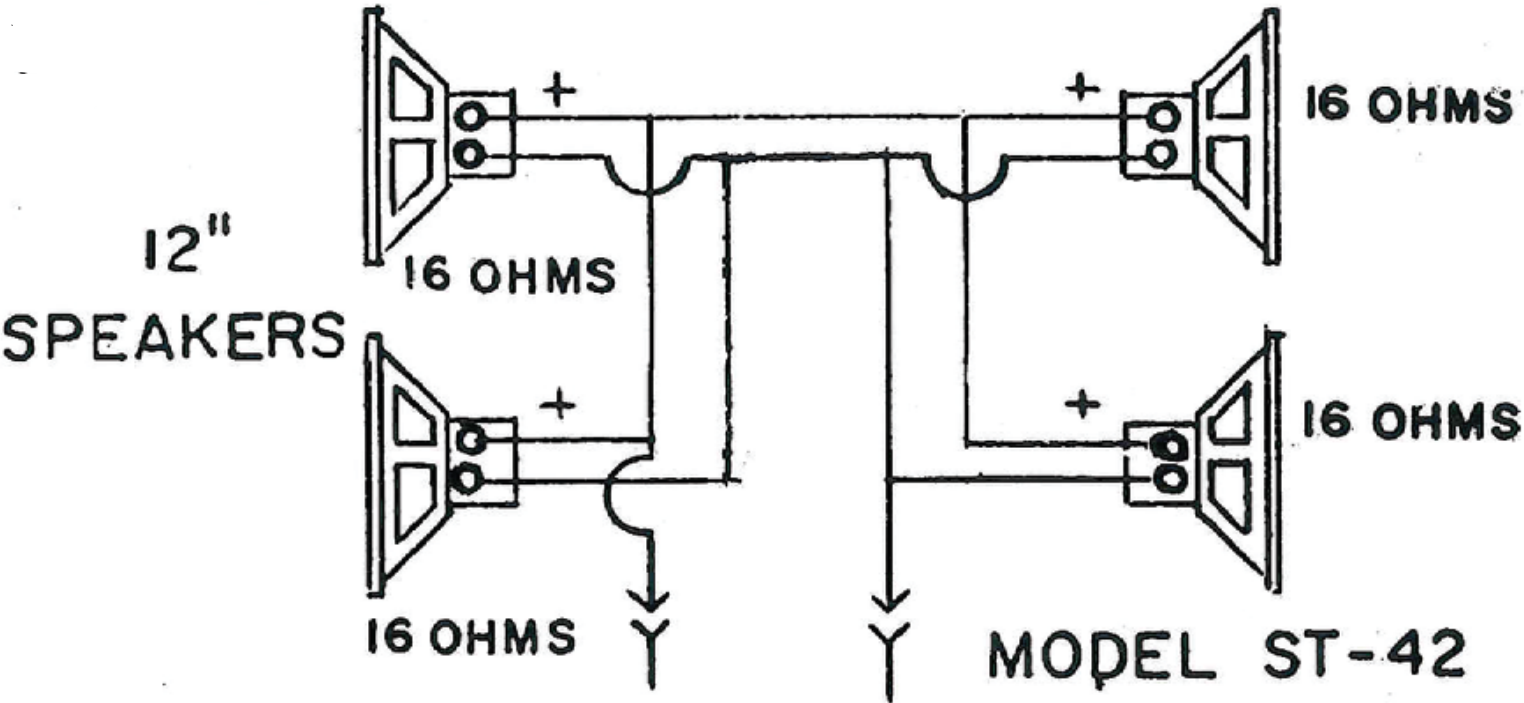


Series	ST (60s)
Model	ST-25
Type	2x15" speaker enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	6930-031
Woofer Power Handling	60 Watts

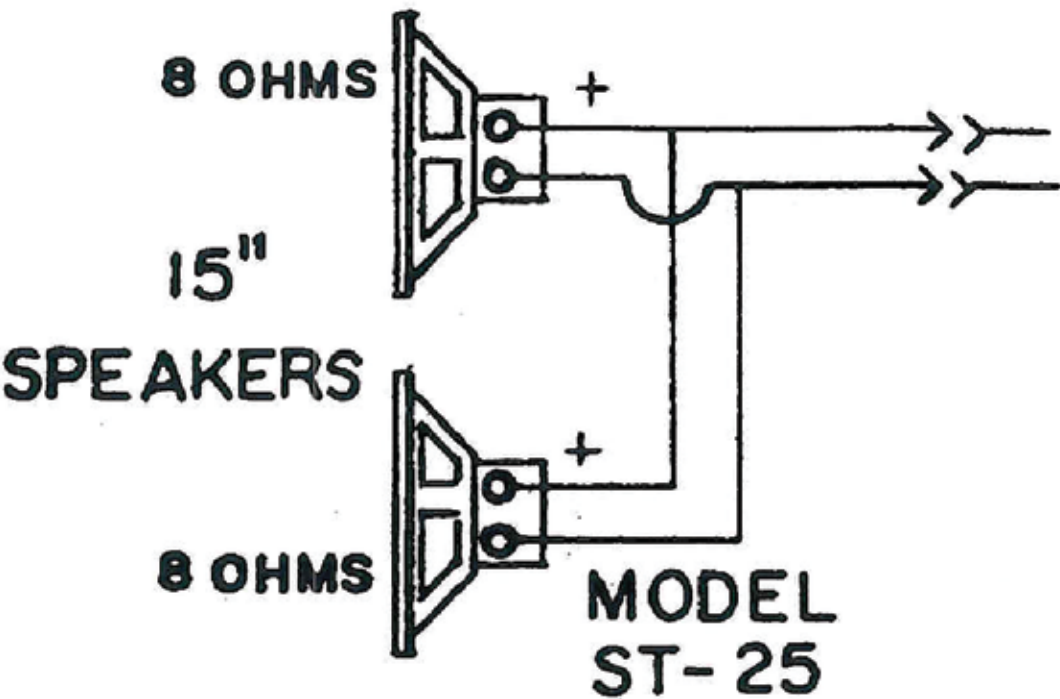

Series	ST (60s)
Model	ST-22
Type	2x12" speaker enclosure
Cabinet Impedance	4 Ohms
Speaker Impedance	8 Ohms
Wiring	Parallel
Woofer Part Number	6930-055
Woofer Power Handling	60 Watts

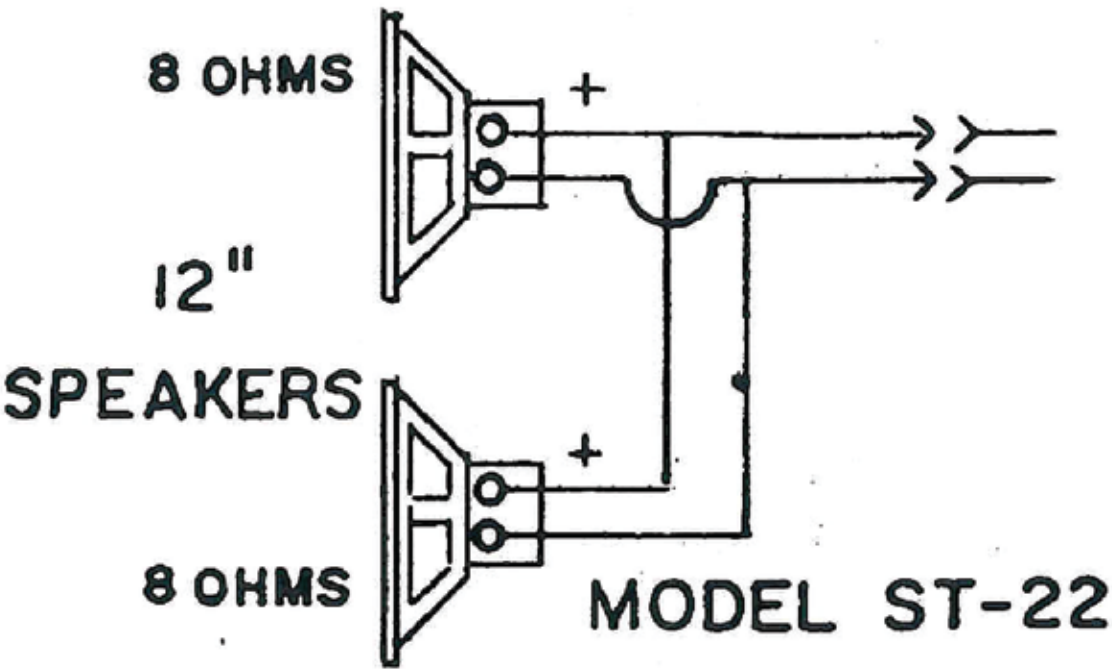


Series	V-412
Model	V-412BA, V-412TA
Type	4x12" guitar enclosure
Cabinet Impedance	16 Ohms
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-450-16
Woofer Power Handling	30 Watts

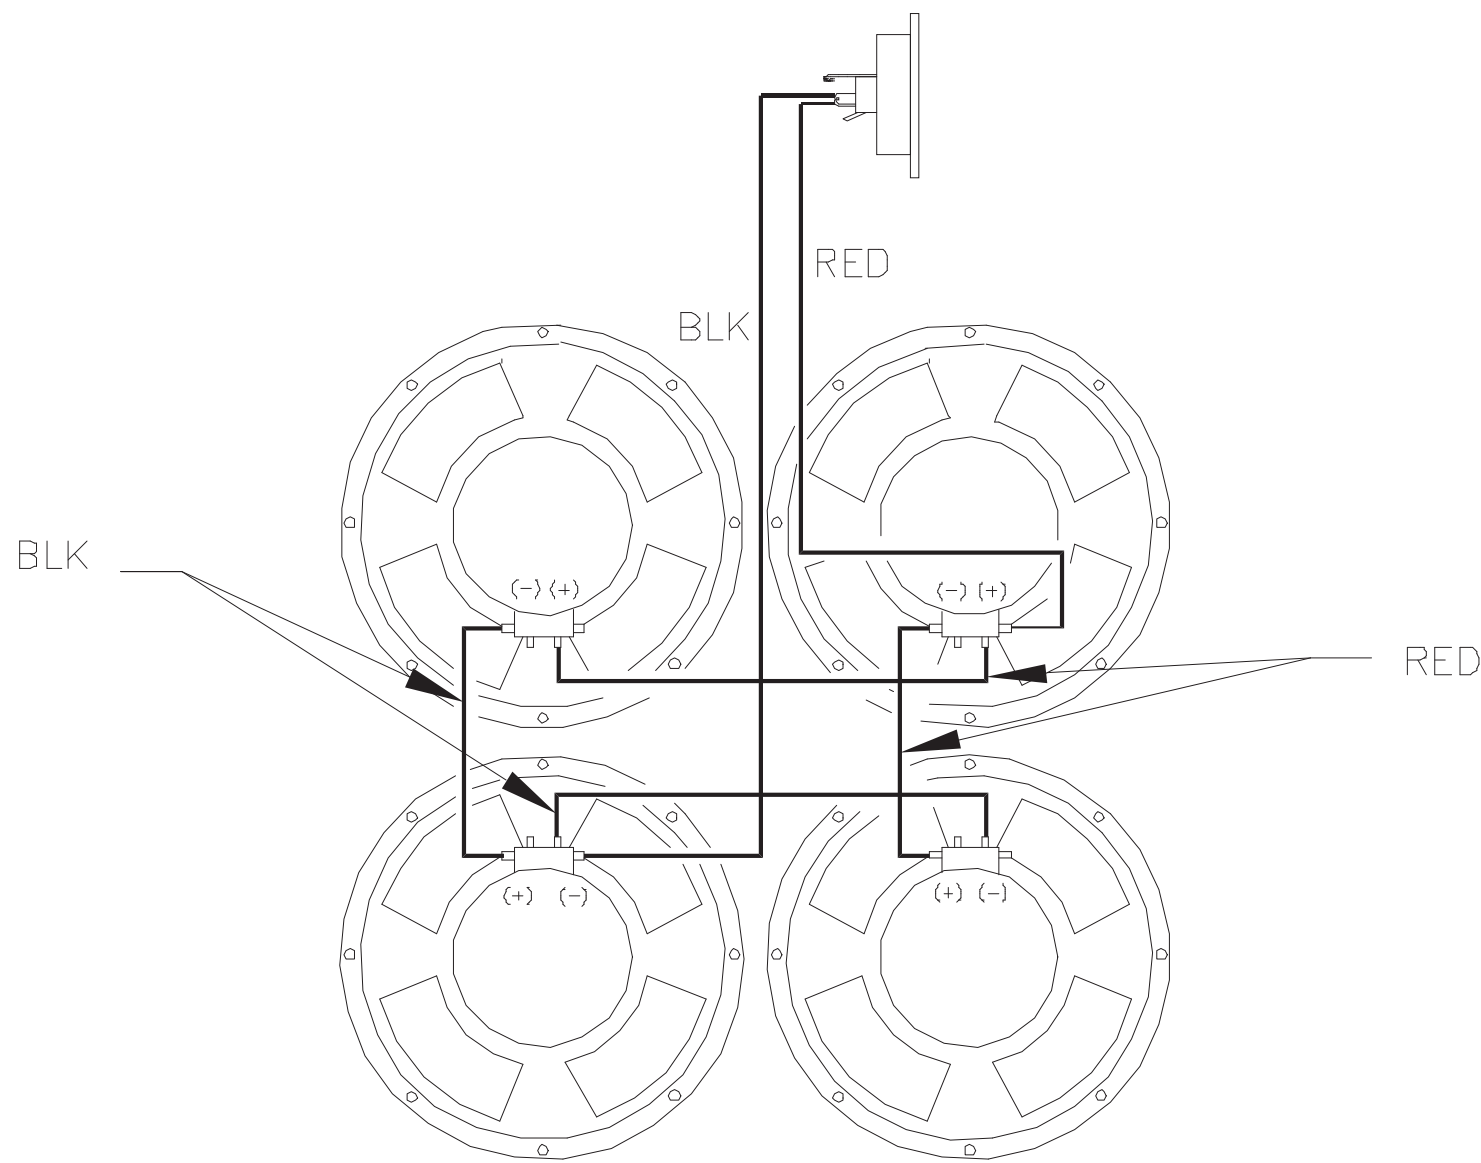


LOOKING INSIDE OF CABINET


Series	V-412
Model	V-412BC, V-412TC
Type	4x12" guitar enclosure
Cabinet Impedance	4,16 Ohms Mono 8 Ohms Stereo
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-075-16
Woofer Power Handling	75 Watts

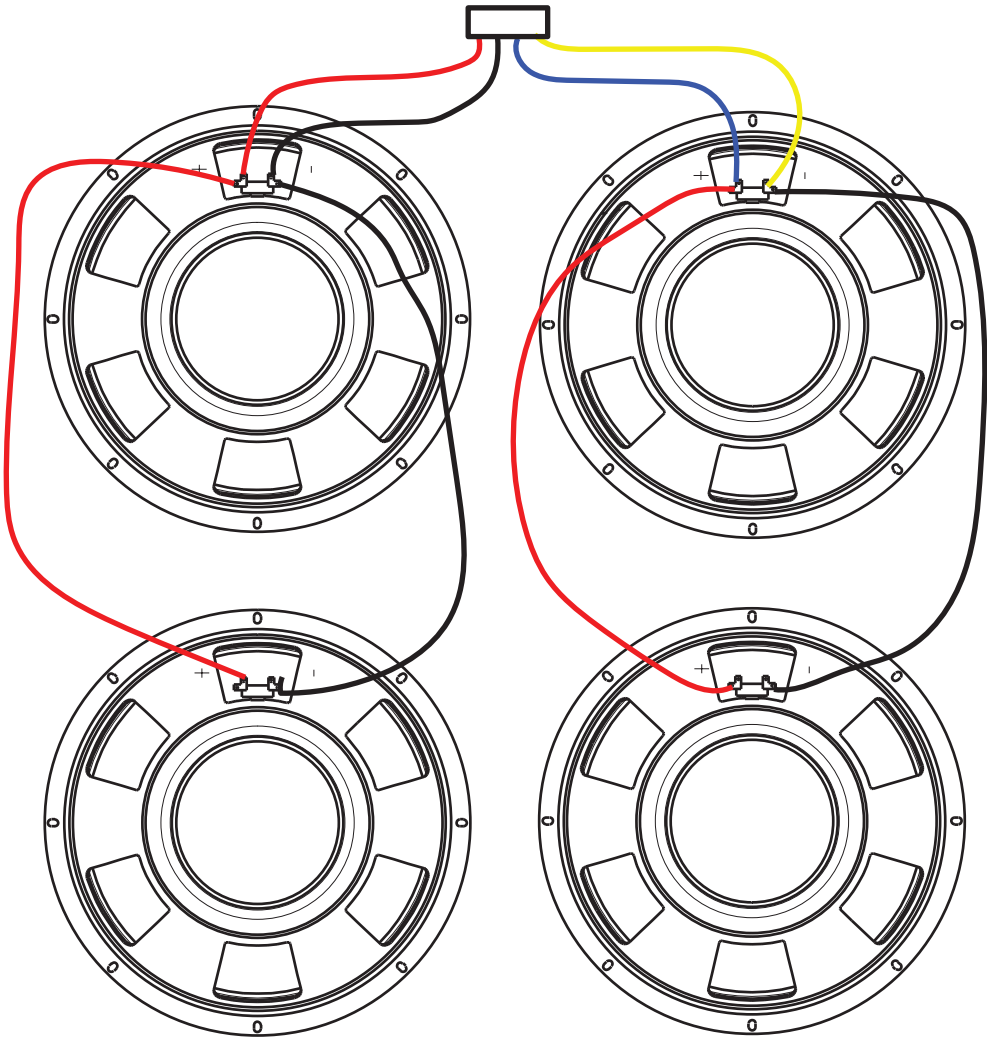


Series	V-412
Model	V-412BE, V-412TE
Type	4x12" guitar enclosure
Cabinet Impedance	4,16 Ohms Mono 8 Ohms Stereo
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-380-16
Woofer Power Handling	50 Watts

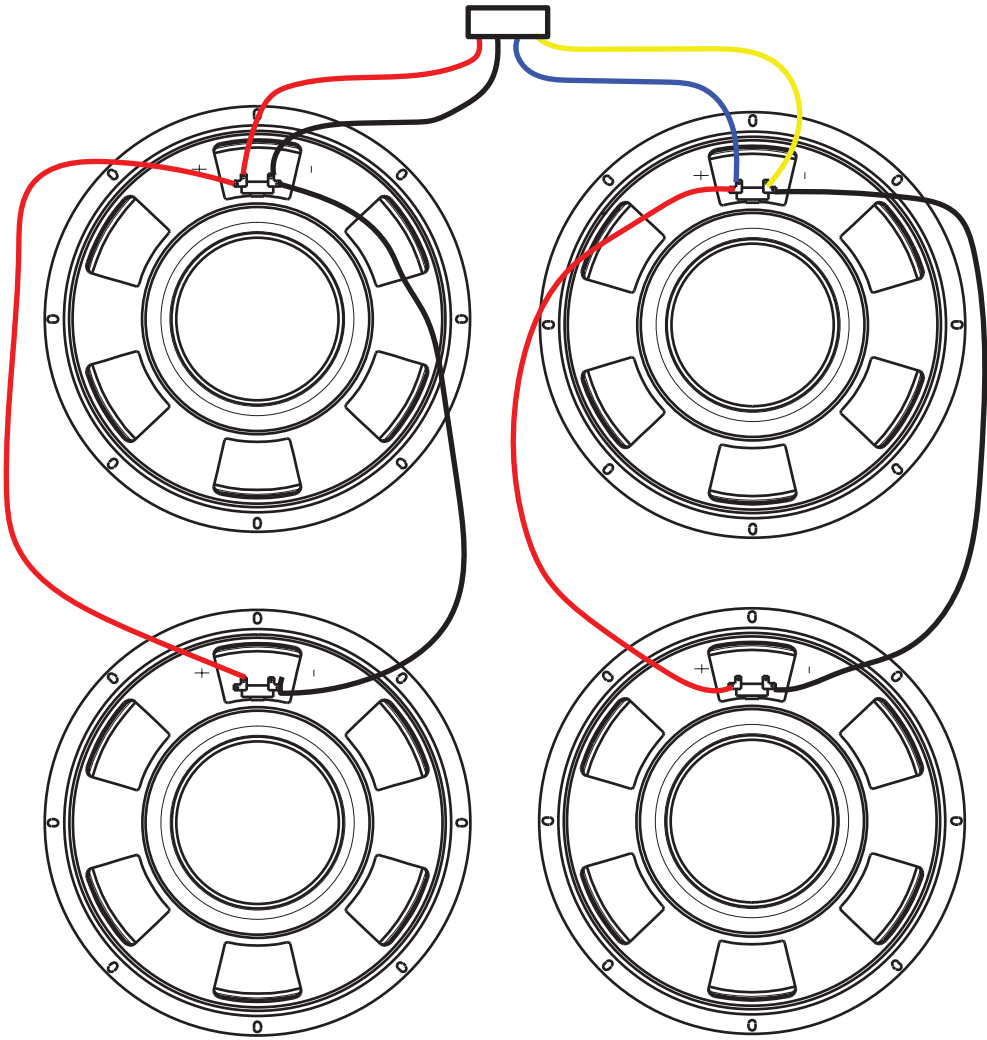


Series	V-412
Model	V-412BL, V-412TL
Type	4x12" guitar enclosure
Cabinet Impedance	4,16 Ohms Mono 8 Ohms Stereo
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-074-16
Woofer Power Handling	25 Watts

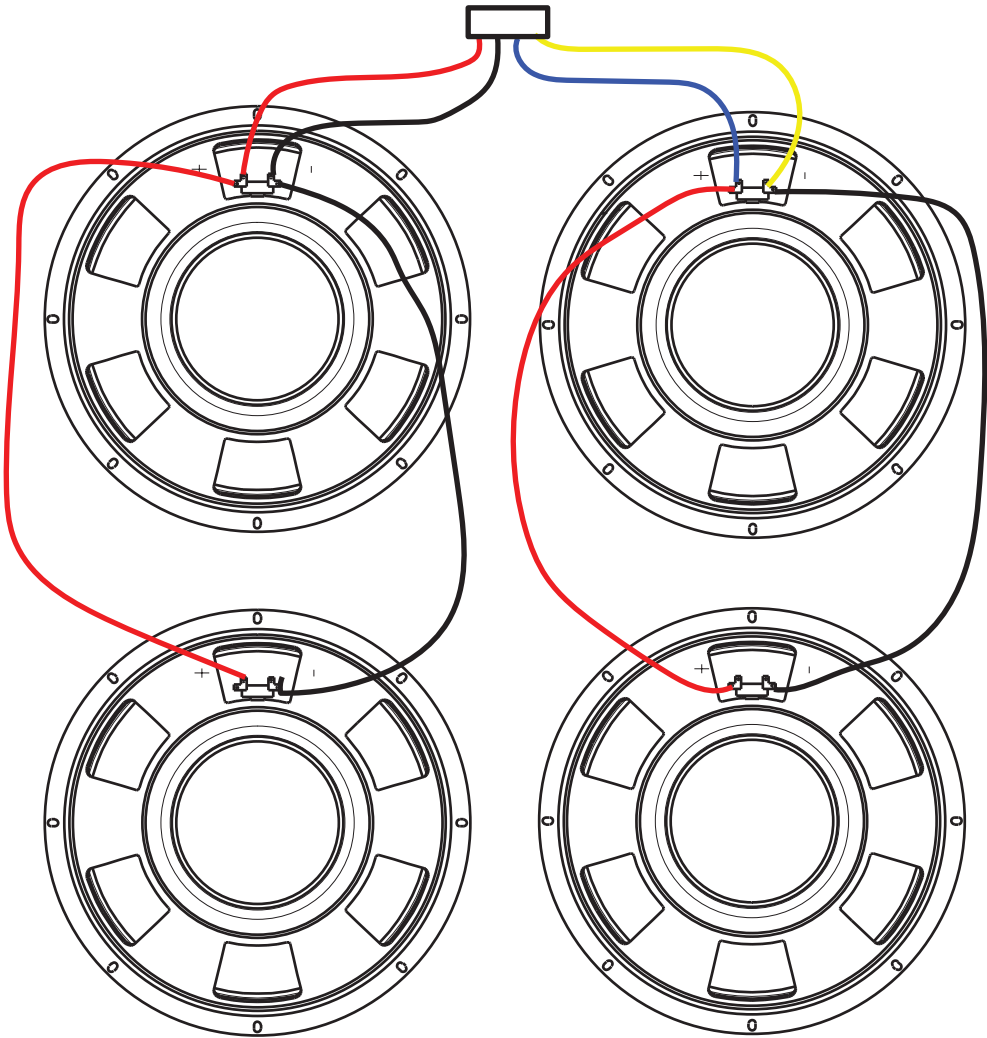


Series	V-412
Model	V-412BV, V-412TV
Type	4x12" guitar enclosure
Cabinet Impedance	4,16 Ohms Mono 8 Ohms Stereo
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-030-16
Woofer Power Handling	30 Watts

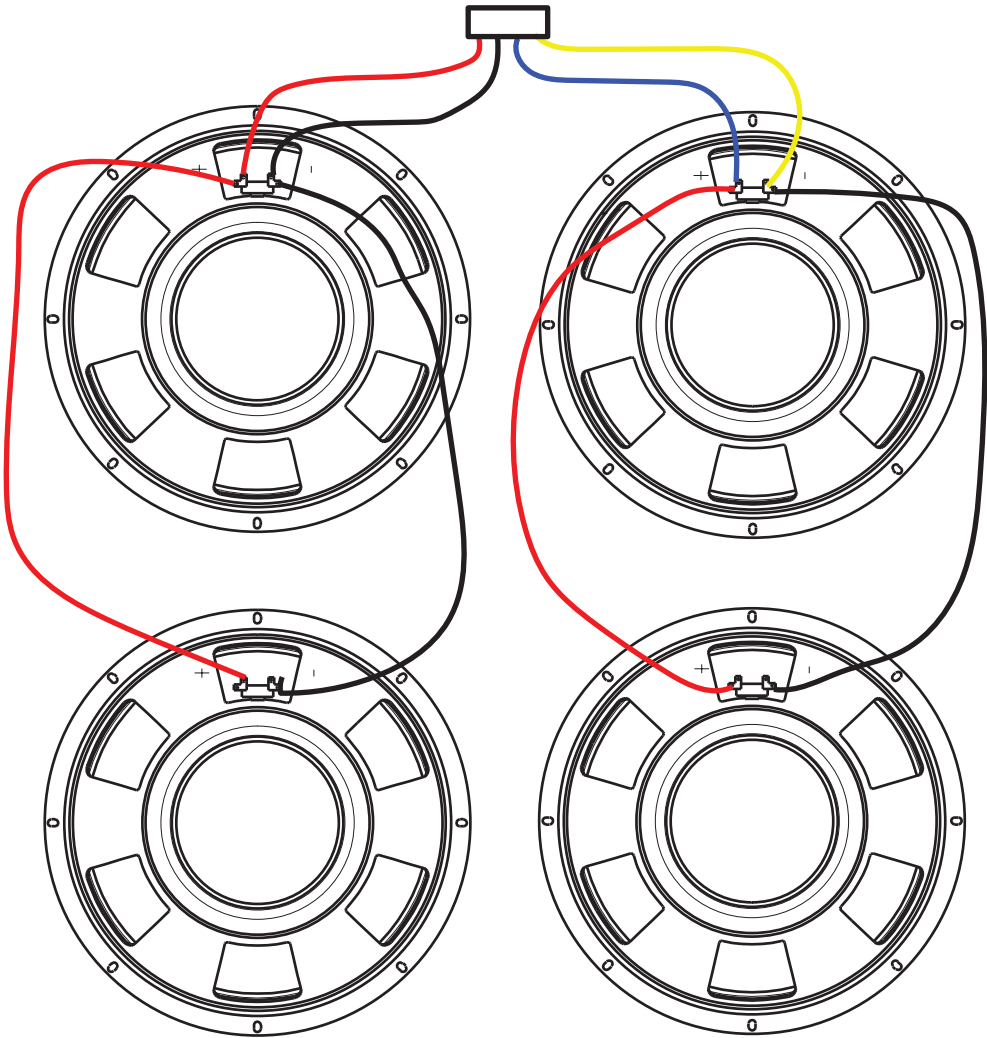


Series	VH-412
Model	VH-412TA, V-412TB
Type	4x12" guitar enclosure
Cabinet Impedance	4,16 Ohms Mono 8 Ohms Stereo
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-030-16
Woofer Power Handling	30 Watts

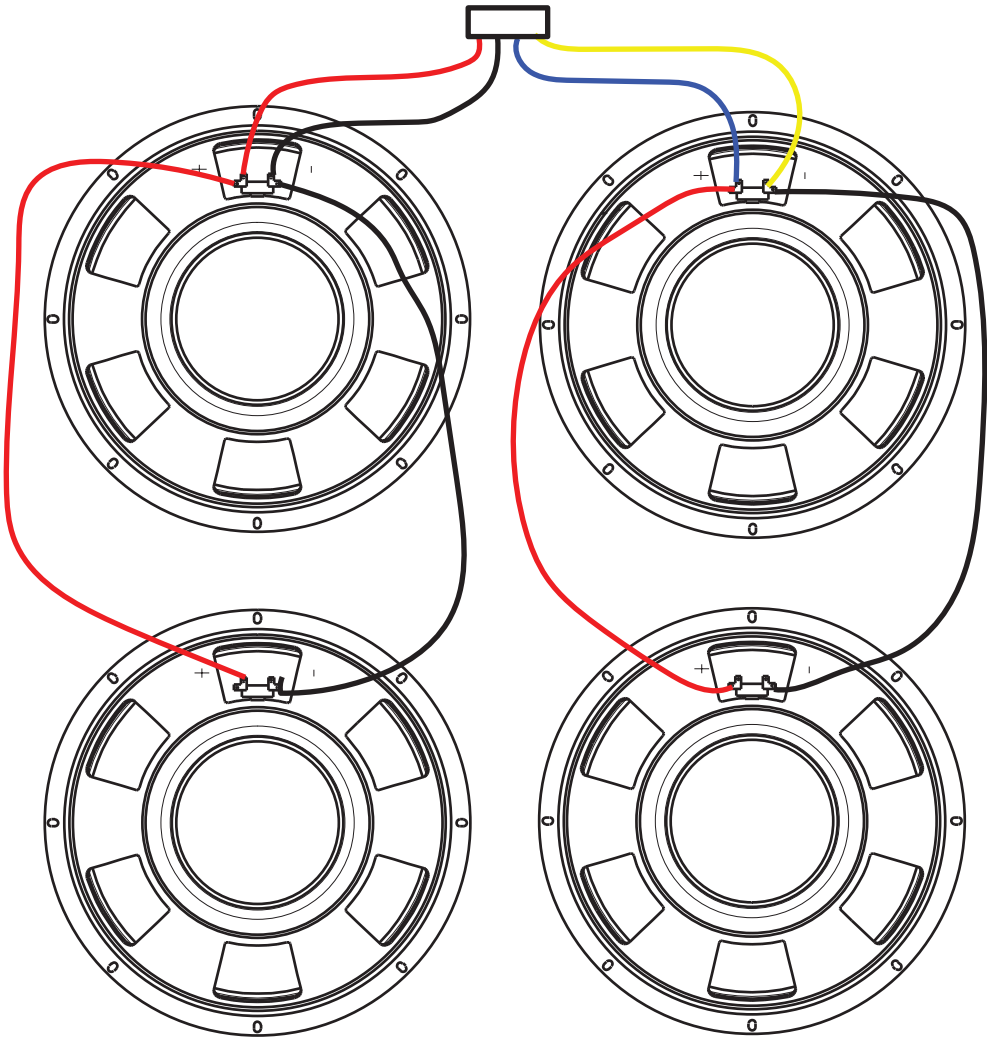


Series	Diamond Blue
Model	R-412TA, R-412BA
Type	4x12" speaker enclosure
Cabinet Impedance	16 Ohms
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	86-068-16
Woofer Power Handling	50 Watts

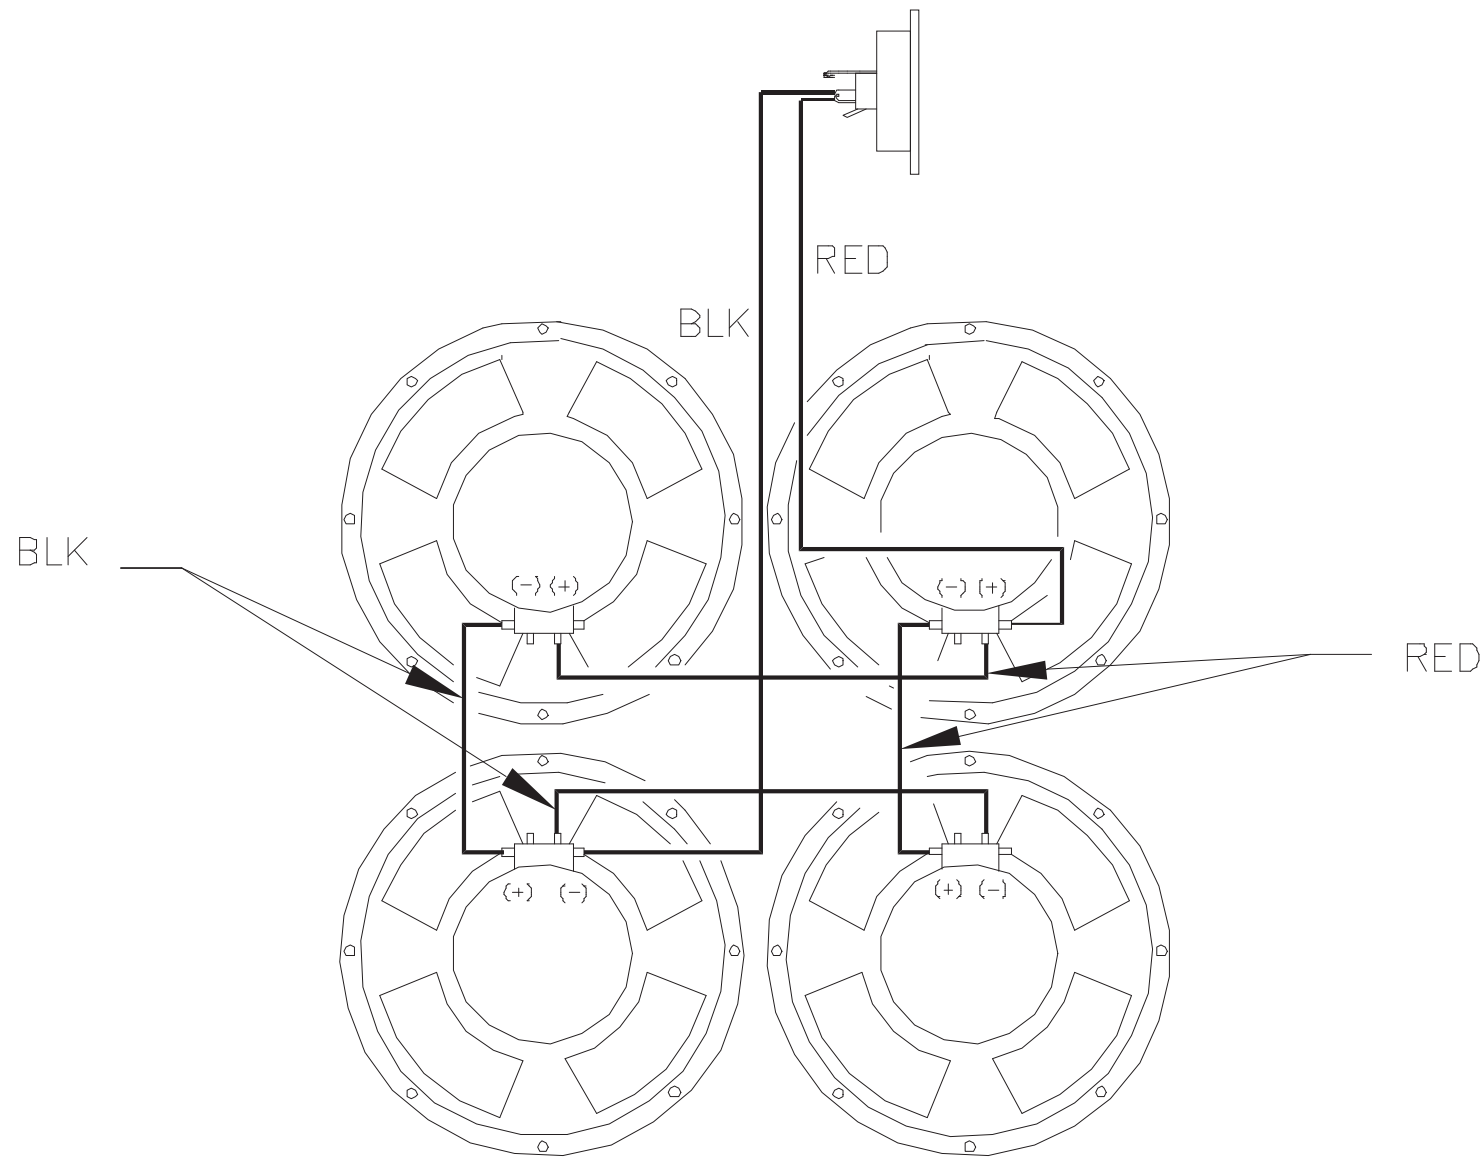

Series	SS
Model	SS-412ER, SS-412ES
Type	4x12" guitar enclosure
Cabinet Impedance	4,16 Ohms Mono
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	Celestion G12M-70
Woofer Power Handling	70 Watts

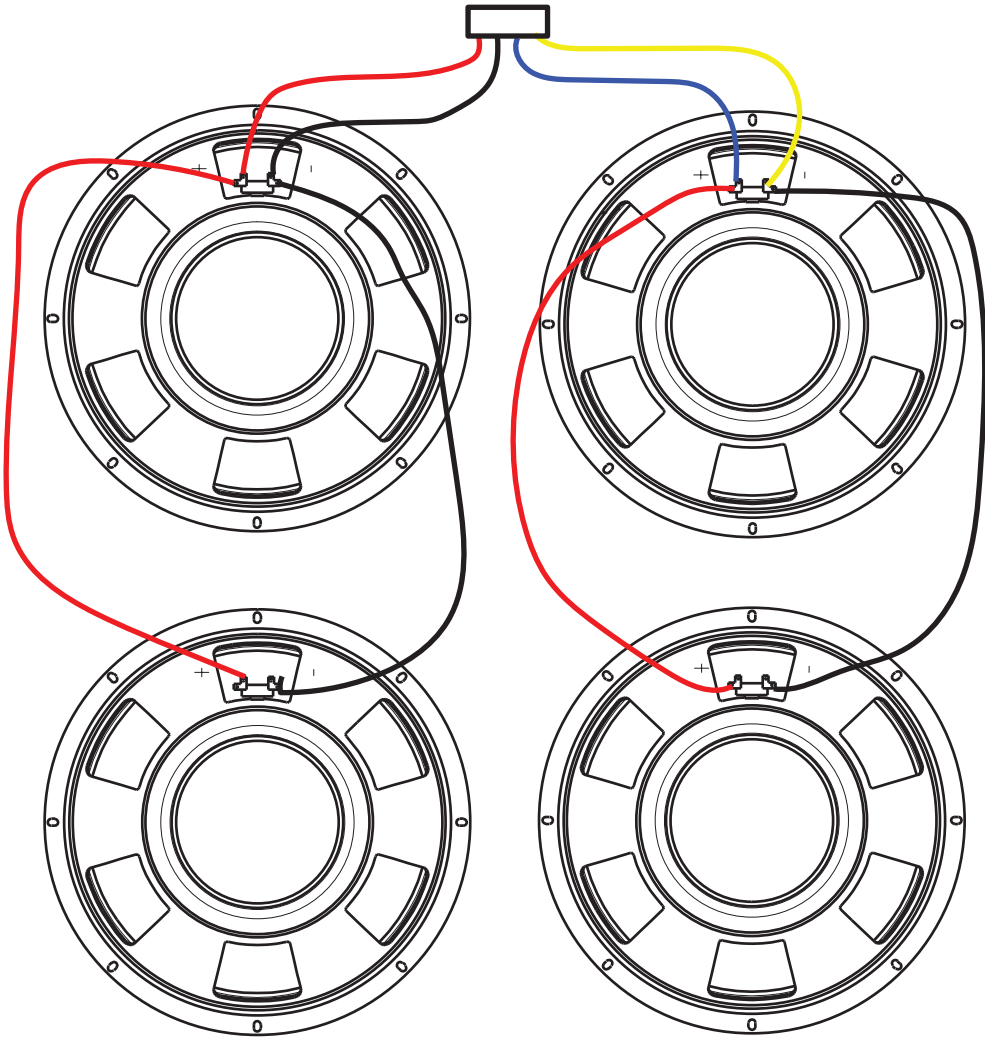

Series	SS
Model	SS-412AR, SS-412AS
Type	4x12" guitar enclosure
Cabinet Impedance	4,16 Ohms Mono
Speaker Impedance	16 Ohms
Wiring	Series/Parallel
Woofer Part Number	Celestion G12T-75
Woofer Power Handling	75 Watts

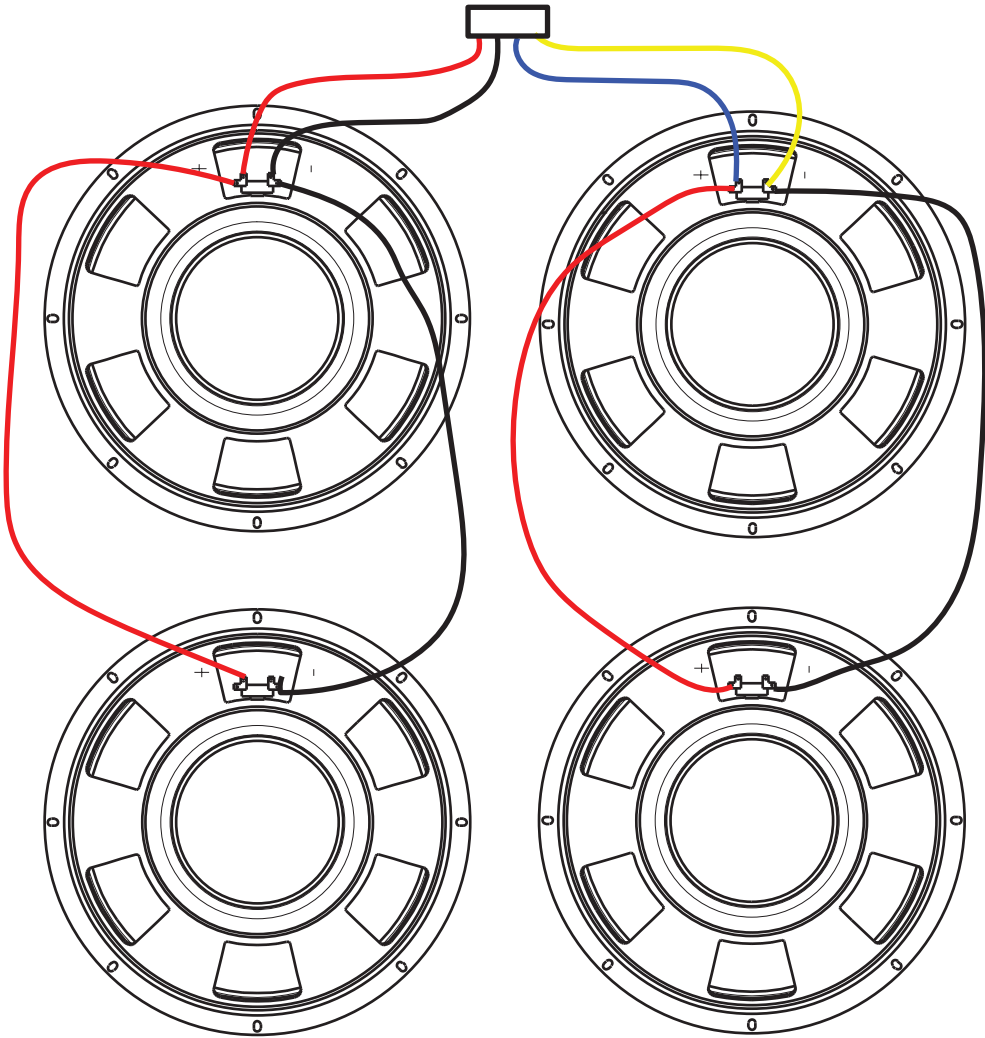

Series	SS
Model	SS-212EC
Type	2x12" guitar enclosure
Cabinet Impedance	2 x 8 Ohms Mono
Speaker Impedance	8 Ohms
Wiring	Series
Woofer Part Number	Celestion G12M-70
Woofer Power Handling	70 Watts

